


# 21" Auto scan Colour Monitor

Service  
Service  
**Service**

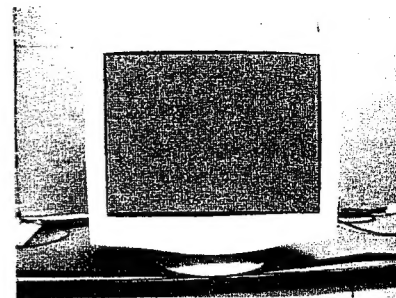

DDC/Power saving/TCO

# Service Manual

Horizontal frequencies  
30 - 107kHz

## Table of Contents

Description	Page	Description	Page
Important Safety Notice .....	2	Terminal(A1) Schematic Diagram & PCB (A1) .	31
Technical Data .....	3	Video(A2) Schematic Diagram & PCB (A2) . . .	32
Regulatory Information .....	4	Deflection(B) Schematic Diagram .....	33
Installation .....	5	Waveforms (A, B, C) .....	34
OSD Adjustment .....	6~15	PCB (B, C) .	35
Mechanical Instructions .....	16	Power Board(Diagram C) & Control Panel . . .	36
Warning and Notes .....	17	Repair Tips .....	37
DDC DATA .....	18	Exploded View .....	38
DDC Instructions .....	19~22	Recommended Parts List .....	39
Electrical Adjustments .....	23~26	Spare Parts List .....	40~45
Purity and Static convergence Adjustments . .	27	General Product Specification.....	46~77
Safety Test Requirements (Hipot & Ground) . .	28	Repair flow chart .....	78~85
Wiring Diagram .....	29		
Block Diagram .....	30		

REFER TO BACK COVER FOR IMPORTANT SAFETY GUIDELINES

## SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

## IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all \_\_\_\_\_ Consumer Electronics Company\*\* Equipment. The service procedures recommended by \_\_\_\_\_ and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. \_\_\_\_\_ could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, \_\_\_\_\_ has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by \_\_\_\_\_ must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

\*\* Hereafter throughout this manual, \_\_\_\_\_ Consumer Electronics Company will be referred to as \_\_\_\_\_

### WARNING

Critical components having special safety characteristics are identified with a **▲** by the Ref. No. in the parts list and enclosed within a broken line\* (where several critical components are grouped in one area) along with the safety symbol **▲** on the schematics or exploded views.

Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from \_\_\_\_\_ assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

\* Broken Line 

# Technical Data

3

## Technical Specification\*

### CRT

Size and deflection	: 21 inch/51cm, 90° deflection angle
Dot pitch/Grille pitch	: 0.25mm
Horizontal pitch	: 0.21mm
Tube type	: Shadow mask, flat square, high contrast, antiglare, anti-static, anti-reflection, light transmission 43%
Phosphor	: P22
Recommended display area	: 15.4"x11.6"/392 x 294 mm
Maximum display area	: 16.0"x12.0"/406 x 305 mm
Scanning	
Horizontal scanning	: 30 - 107 KHz
Vertical scanning	: 50 - 160 Hz
Video	
Video dot rate	: 261 Mhz
Input impedance	
- Video	: 75 Ohm
- Sync	: 2.2 kOhm
Input signal levels	: 0.7Vpp
	Separate sync
Sync input signal	: Composite sync
Sync polarities	: Positive and negative

### White Color Temperature

#### Chromaticity CIE coordinates:


at 9300 °K	x = 0.283	y = 0.297
6500 °K	x = 0.313	y = 0.329
5500 °K	x = 0.332	y = 0.347

### Physical Specifications

Dimensions	: 482x476x467mm(including base) 482x437x428mm(excluding base)
weight	: 28.0 Kg
Power supply	: 90 - 264 VAC, 50/60HZ
Power consumption	: <160 Watt
Operating condition	
Temperature	: 0 °C - 40 °C
Relative Humidity	: 10 % - 90 %
Storage condition	
Temperature	: - 25 °C - 60 °C
Relative Humidity	: 5 % - 95 %

### Pin assignment :

The 15-pin D-sub connector(male) of the signal cable (IBM systems) :



Pin No.	Assignment	Pin No.	Assignment
1	Red video input	9	No pin
2	Green video input	10	Logic ground
3	Blue video input	11	Identification output - Connected to pin 10
4	Identification output - Connected to pin 10	12	Serial data line(SDA)
5	Ground	13	H.Sync /H+V
6	Red video ground	14	V.Sync(VCLK for DDC)
7	Green video ground	15	Data clock line(SCL)
8	Blue video ground		

## Automatic Power Saving

If you have VESA's DPMS compliance display card or software installed in your PC, the monitor can automatically reduce its power consumption when not in use. And if an input from a keyboard, mouse or other input devices is detected, the monitor will automatically "wake up". The following table shows the power consumption and signalling of this automatic power saving features :

Power Management Definition						
VESA's mode	VIDEO	H-SYNC	V-SYNC	POWER USED	POWER SAVING %	LED COLOR
ON	Active	Yes	Yes	< 104 W	0 %	Green
Stand-by	Blanked	No	Yes	< 7 W	93 %	Yellow
Suspend	Blanked	Yes	No	< 7 W	93 %	Yellow
OFF	Blanked	No	No	< 2.8 W	97 %	Amber

This monitor is Energy Star® compliant. As an ENERGY STAR® Partner, has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

## Regulatory Information

## TCO'92 and TCO '99 Information

## Why do we have environmentally labeled computers?

In many countries, environmental labeling has become an established method for encouraging the adaptation of goods and services to the environment. The main problem, as far as computers and other electronics equipment are concerned, is that environmentally harmful substances are used both in the products and during their manufacture. Since it is not so far possible to satisfactorily recycle the majority of electronics equipment, most of these potentially damaging substances sooner or later enter nature.

There are also other characteristics of a computer, such as energy consumption levels, that are important from the viewpoints of both the work (internal) and natural (external) environments. Since all methods of electricity generation have a negative effect on the environment (e.g. acidic and climate-influencing emissions, radioactive waste), it is vital to save energy. Electronics equipment in offices is often left running continuously and thereby consumes a lot of energy.

## What does labeling involve?

This product meets the requirements for the TCO'99 scheme which provides for international and environmental labeling of personal computers. The labeling scheme was developed as a joint effort by the TCO (The Swedish Confederation of Professional Employees), Svenska Naturskyddsforeningen (The Swedish Society for Nature Conservation) and Statens Energimyndighet (The Swedish National Energy Administration).

Approval requirements cover a wide range of issues: environment, ergonomics, usability, emission of electric and magnetic fields, energy consumption and electrical and fire safety.

The environmental demands impose restrictions on the presence and use of heavy metals, brominated and chlorinated flame retardants, CFCs (freons) and chlorinated solvents, among other things. The product must be prepared for recycling and the manufacturer is obliged to have an environmental policy which must be adhered to in each country where the company implements its operational policy.

The energy requirements include a demand that the computer and/or display, after a certain period of inactivity, shall reduce its power consumption to a lower level in one or more stages. The length of time to reactivate the computer shall be reasonable for the user.

Labeled products must meet strict environmental demands, for example, in respect of the reduction of electric and magnetic fields, physical and visual ergonomics and good usability.

Below you will find a brief summary of the environmental requirements met by this product. The complete environmental criteria document may be ordered from:

## Environmental Requirements

## Flame retardants

Flame retardants are present in printed circuit boards, cables, wires, casings and housings. Their purpose is to prevent, or at least to delay the spread of fire. Up to 30% of the plastic in a computer casing can consist of flame retardant substances. Most flame retardants contain bromine or chloride, and those flame retardants are chemically related to another group of environmental toxins, PCBs. Both the flame retardants containing bromine or chloride and the PCBs are suspected of giving rise to severe health effects, including reproductive damage in fish-eating birds and mammals, due to the bio-accumulative\* processes. Flame retardants have been found in human blood and researchers fear that disturbances in fetus development may occur.

The relevant TCO'99 demand requires that plastic components weighing more than 25 grams must not contain flame retardants with organically bound bromine or chlorine. Flame retardants are allowed in the printed circuit boards since no substitutes are available.

## Cadmium\*\*

Cadmium is present in rechargeable batteries and in the color-generating layers of certain computer displays. Cadmium damages the nervous system and is toxic in high doses. The relevant TCO'99 requirement states that batteries, the color-generating layers of display screens and the electrical or electronics components must not contain any cadmium.

## Mercury\*\*

Mercury is sometimes found in batteries, relays and switches. It damages the nervous system and is toxic in high doses. The relevant TCO'99 requirement states that batteries may not contain any mercury. It also demands that mercury is not present in any of the electrical or electronics components associated with the labeled unit.

## CFCs (freons)

The relevant TCO'99 requirement states that neither CFCs nor HCFCs may be used during the manufacture and assembly of the product. CFCs (freons) are sometimes used for washing printed circuit boards. CFCs break down ozone and thereby damage the ozone layer in the stratosphere, causing increased reception on earth of ultraviolet light with increased risks e.g. skin cancer (malignant melanoma) as a consequence.

## Lead\*\*

Lead can be found in picture tubes, display screens, solders and capacitors. Lead damages the nervous system and in higher doses, causes lead poisoning. The relevant TCO'99 requirement permits the inclusion of lead since no replacement has yet been developed.

\* Bio-accumulative is defined as substances which accumulate within living organisms.

\*\* Lead, Cadmium and Mercury are heavy metals which are bio-accumulative.

## Energy Star Declaration

This monitor is equipped with a function for saving energy which supports the VESA Display Power Management Signaling (DPMS) standard. This means that the monitor must be connected to a computer which supports VESA DPMS to fulfill the requirements in the NUTEK specification 803299/94. Time settings are adjusted from the system unit by software. From indicated inactivity to Power Saving Position A2, the total time must not be set to more than 70 minutes.

## NUTEK

## Federal Communications Commission (FCC) Notice (U.S. Only)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


Use only RF shielded cable that was supplied with the monitor when connecting this monitor to a computer device.

To prevent damage which may result in fire or shock hazard, do not expose this appliance to rain or excessive moisture.

THIS CLASS B DIGITAL APPARATUS MEETS ALL REQUIREMENTS OF THE CANADIAN INTERFERENCE-CAUSING EQUIPMENT REGULATIONS.



Front View

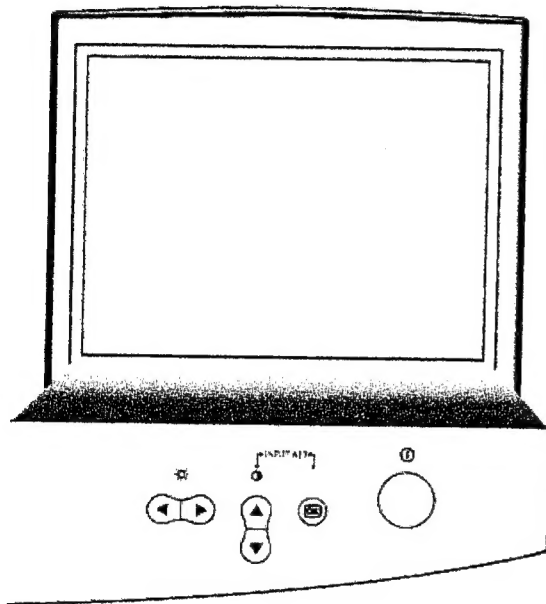

Power button switches your monitor on.



OK button which when pressed will take you to the OSD controls



Contrast hotkey. When the UP arrow is pressed, the adjustment controls for the CONTRAST will show up.




UP and DOWN buttons are used when adjusting the OSD of your monitor



Brightness hotkey. When both the LEFT and RIGHT arrows are pressed at the same time, then the adjustment controls for BRIGHTNESS will show up.








LEFT and RIGHT buttons, like the UP and DOWN buttons, are also used in adjusting the OSD of your monitor.



By pressing both the UP and OK buttons, you can easily access the Input Signals A and/or B.

Rear View

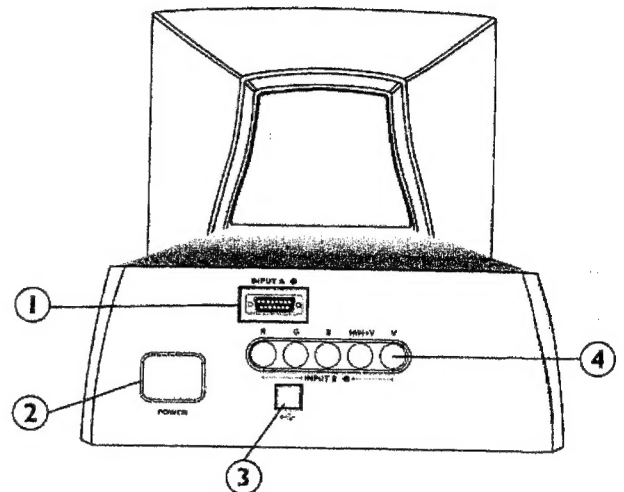

1. D-Sub Port - Attach the D-Sub connector that comes with your monitor here. Other end connects to your PC.

2. Power in - Attach power cable here.

3. USB Port - Attach your USB Upstream cable here. Connect the other end to your USB hub or your PC's USB connector.

4. BNC Connectors - Attach the connectors here to get the best video performance from your monitor

## On-Screen Display






Description of the On-Screen Display   The OSD Tree   The OSD Controls


### Description of the On Screen Display

What is the On-Screen Display?

This is a feature in all monitors which allows an end-user to adjust screen performance of monitors directly through an on-screen instruction window. The user interface provides user-friendliness and ease-of-use when operating the monitor.

Basic and simple instruction on the control keys.

On the front controls of your monitor, once you press the  button, the On Screen Display (OSD) Main Controls window will pop up and you can now start making adjustments to your monitor's various features. Use the   or   the keys to make your adjustments within.

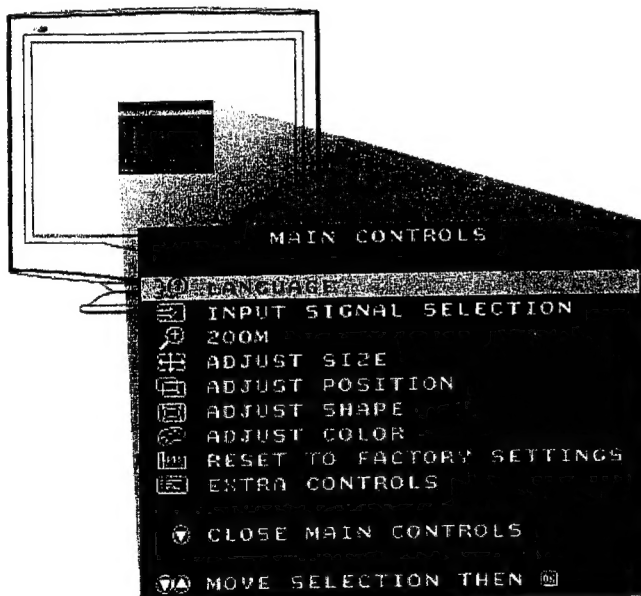

### The OSD Tree


Below is an overall view of the structure of the On-Screen Display. You can use this as reference when you want to later on work your way around the different adjustments.

# OSD menu tree structure

7

## The OSD Tree

Below is an overall view of the structure of the On-Screen Display. You can use this as reference when you want to later on work your way around the different adjustments.

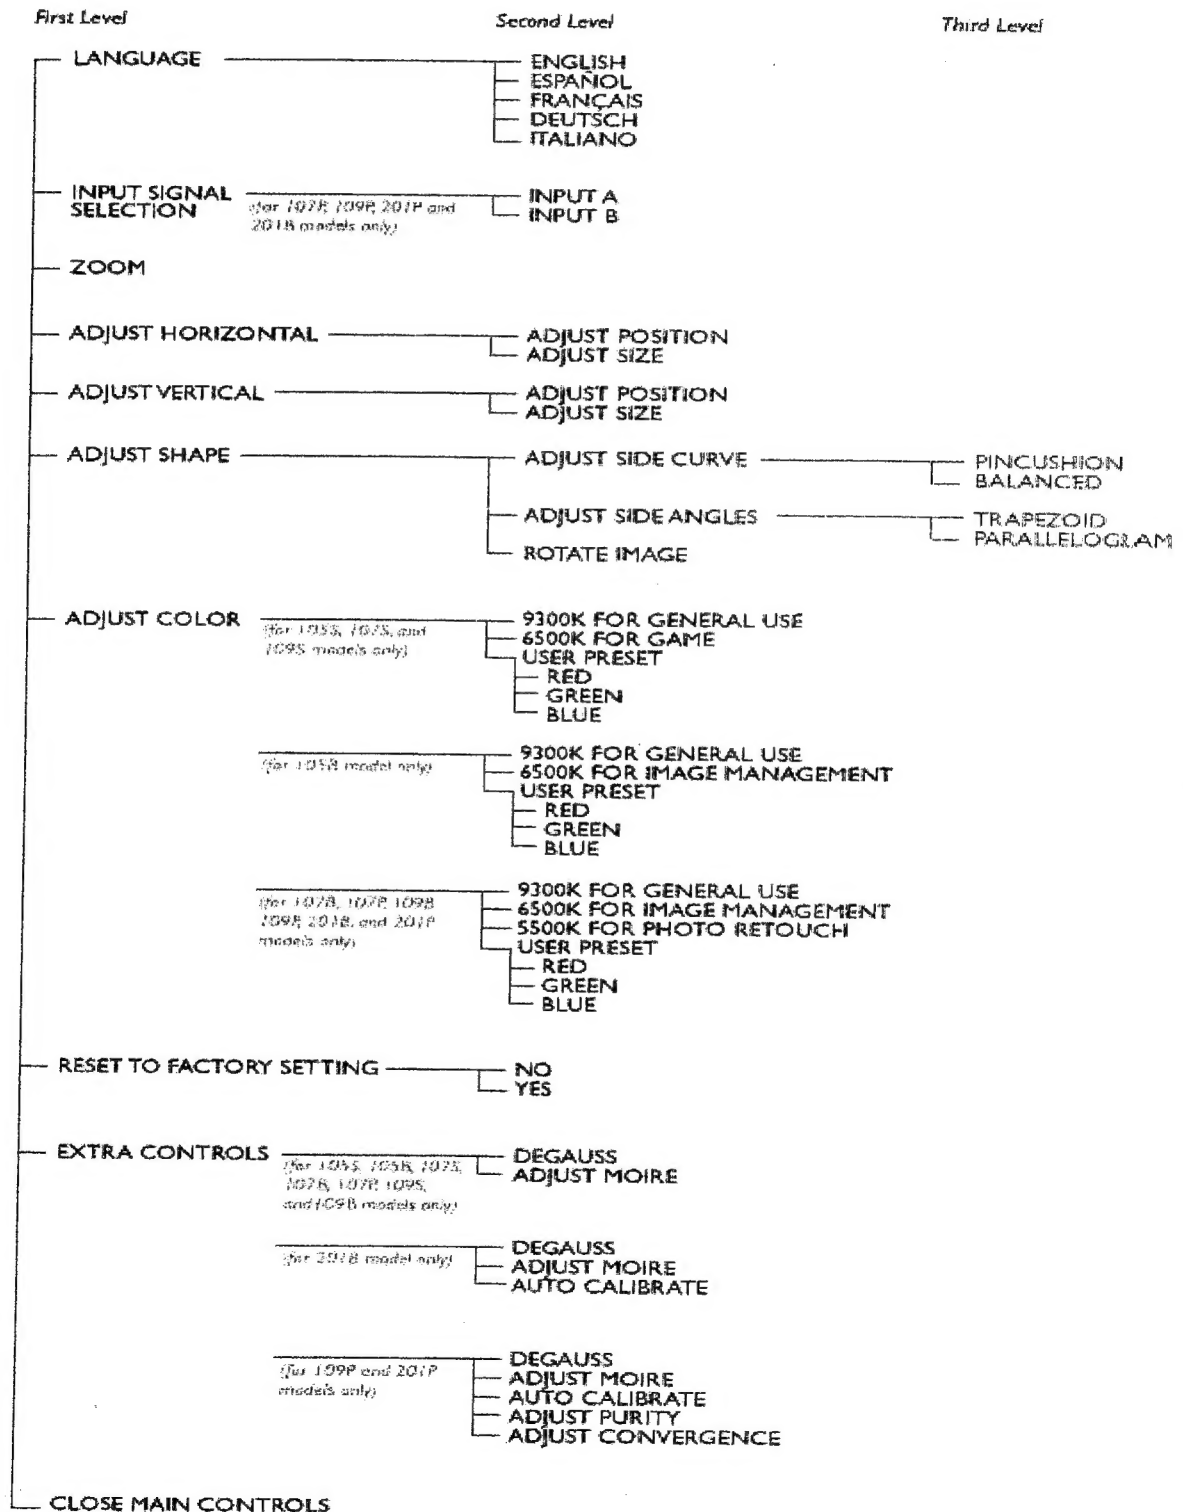




## OSD Adjustments





### The OSD Controls

#### BRIGHTNESS

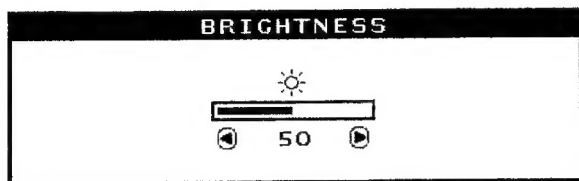To adjust your screen's brightness, follow the steps below. Brightness is the overall intensity of the light coming from the screen. A 50% brightness is recommended.

- 1) Press the  or  button on the monitor. The BRIGHTNESS window appears.






- 2) Press the  or  button to adjust the brightness.
- 3) When the brightness is adjusted to the level desired, stop pressing the  or  button and after three seconds the BRIGHTNESS window will disappear with the new adjustment saved.





**Smart Help** After the BRIGHTNESS window has disappeared, to continue to the CONTRAST window, follow the steps under CONTRAST.

#### CONTRAST

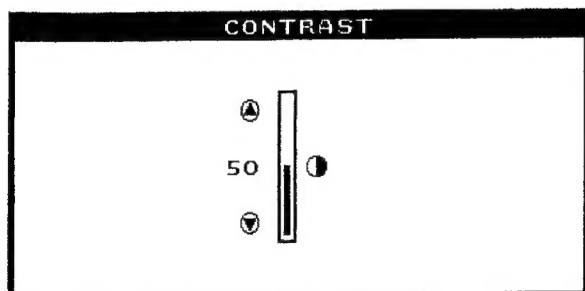To adjust your screen's contrast, follow the steps below. Contrast is the difference between the light and dark areas on the screen. A 100% contrast is recommended.

- 1) Press the  or  button on the monitor. The CONTRAST window appears.






- 2) Press the  or  button to adjust the contrast.
- 3) When the contrast is adjusted to the level desired, stop pressing the  or  button and after three seconds the CONTRAST window will disappear with the new adjustment saved.



**Smart Help** After the CONTRAST window has disappeared, to continue to the MAIN CONTROLS, follow the steps under LANGUAGE


#### LANGUAGE


The ON SCREEN DISPLAY shows its settings in one of five languages. The default is English, but you can select French, Spanish, German, or Italian.

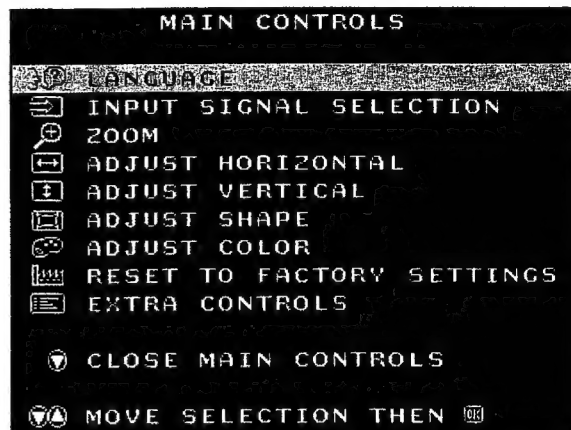- 1) Press the  button on the monitor. The MAIN CONTROLS window appears. LANGUAGE should be highlighted.
- 2) Press the  button again. The LANGUAGE window appears.




- 3) Press the  or  button until the desired language is highlighted.

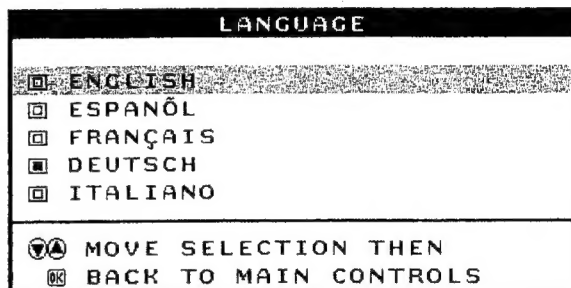

- 4) Press the  button to confirm your selection and return to MAIN CONTROLS window. CLOSE MAIN CONTROLS will be highlighted...

**Smart Help** After returning to MAIN CONTROLS...


... to continue to INPUT SIGNAL SELECTION, press the  button until INPUT SIGNAL SELECTION is highlighted. Next, follow steps 3 - 5 under INPUT SIGNAL SELECTION.

... to exit completely, press  the button


## ZOOM

ZOOM increases or decreases the size of the images on your screen. To adjust the ZOOM follow the steps below.

- 1) Press the **\*** button on the monitor. The MAIN CONTROLS window appears.
- 2) Press the **←** button until ZOOM is highlighted.

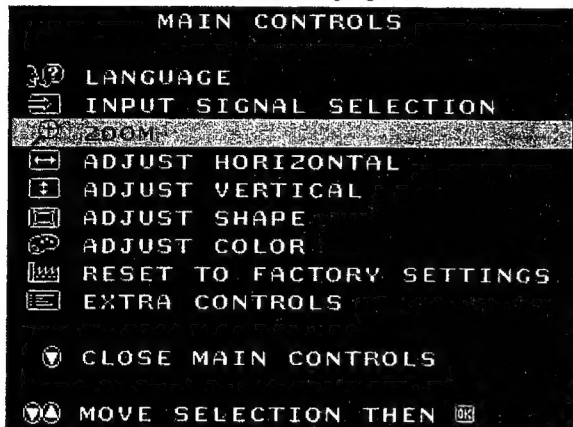

- 3) Press the **\*** button. The ZOOM window appears.

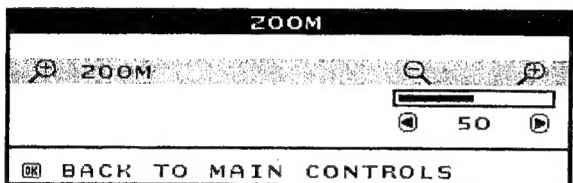

- 4) Press the **←** or **→** button to adjust ZOOM.
- 5) Press the **\*** button to confirm your selection and return to the MAIN CONTROLS window. CLOSE MAIN CONTROLS will be highlighted.

**Smart Help** After returning to MAIN CONTROLS...


... to continue to ADJUST HORIZONTAL, press the **←** button until ADJUST HORIZONTAL is highlighted. Next, follow steps 3 - 7 under ADJUST HORIZONTAL.

... to exit completely, press the **\*** button


## ADJUST HORIZONTAL

ADJUST POSITION under ADJUST HORIZONTAL shifts the image on your screen either to the left or right. Use this feature if your image does not appear centered. ADJUST SIZE under ADJUST HORIZONTAL expands or controls the image on your screen, pushing it out toward the left and right sides or pulling it in toward the center.


- 1) Press the **\*** button on the monitor. The MAIN CONTROLS window appears.
- 2) Press the **←** button until ADJUST HORIZONTAL is highlighted.

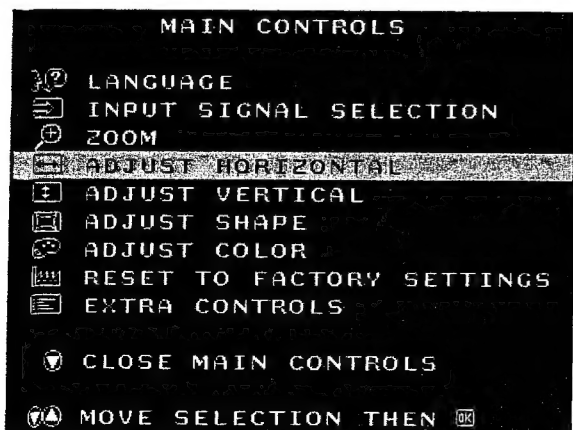

- 3) Press the **\*** button. The ADJUST HORIZONTAL window appears. ADJUST POSITION should be highlighted.

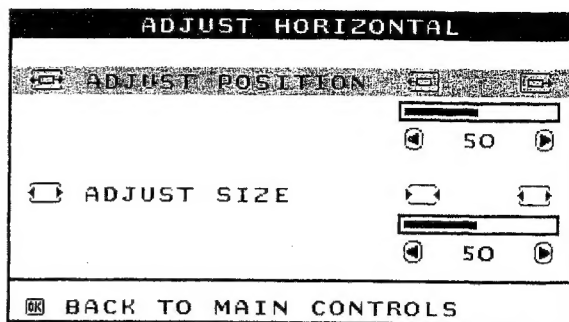

- 4) Press the **←** or **→** button to move the image to the left or right.
- 5) When the position is adjusted, press the **\*** button to return to MAIN CONTROLS window, or press the **→** to highlight ADJUST SIZE.

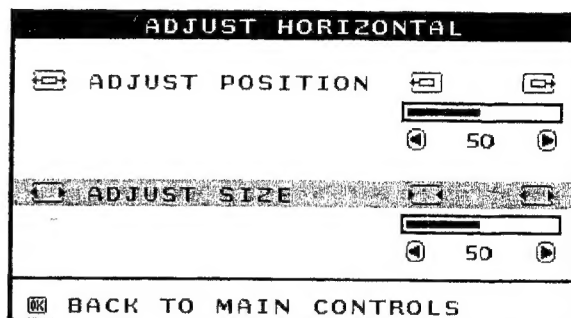

- 6) To adjust the horizontal size, press the **←** or **→** button.
- 7) When the size is adjusted, press the button to return to MAIN CONTROLS window. CLOSE MAIN CONTROLS will be highlighted.

**Smart Help**

After returning to MAIN CONTROLS...

... to continue to ADJUST VERTICAL, press the **←** button until ADJUST VERTICAL is highlighted. Next, start with step 3 under ADJUST VERTICAL and follow the directions.

... to exit completely, press the **\*** button


## ADJUST VERTICAL

ADJUST POSITION under ADJUST VERTICAL shifts the image on your screen either up or down. Use this feature if your image does not appear centered. ADJUST SIZE under ADJUST VERTICAL expands or controls the image on your screen, pushing it out toward the top or bottom or pulling it in toward the center.


- 1) Press the **\*** button on the monitor. The MAIN CONTROLS window appears.

# OSD Adjustments


- 2) Press the **⬅** button until ADJUST VERTICAL is highlighted.

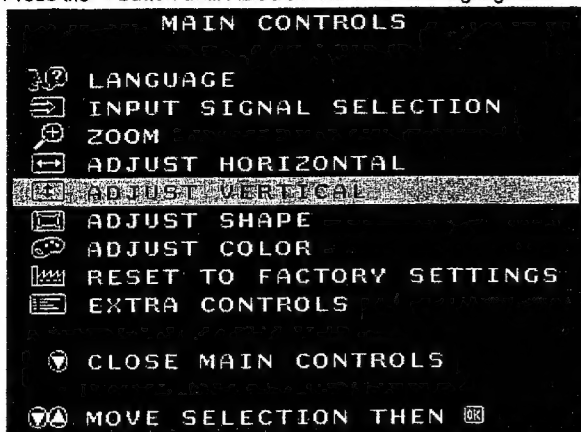

- 3) Press the **⬅** button. The ADJUST VERTICAL window appears. ADJUST POSITION should be highlighted.

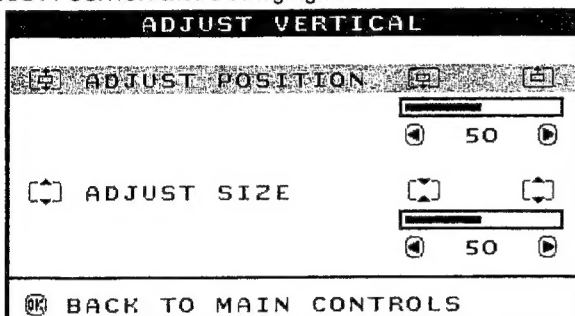

- 4) Press the **⬆** or **⬇** button to move the image up or down.  
 5) When the position is adjusted, press the **⬅** button to return to MAIN CONTROLS window, or press the **⬆** button to highlight ADJUST SIZE.

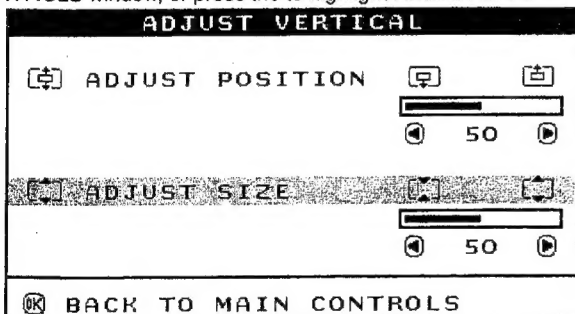

- 6) To adjust the vertical size, press the **⬆** or **⬇** button.  
 7) When the size is adjusted, press the **⬅** button to return to MAIN CONTROLS window. CLOSE MAIN CONTROLS will be highlighted.

Smart Help After returning to MAIN CONTROLS...

... to continue to ADJUST SHAPE, press the **⬆** button until ADJUST SHAPE is highlighted. Next, start with step 3 under ADJUST SHAPE and follow the directions.

... to exit completely, press the **⬅** button


ADJUST SHAPE

ADJUST SIDE CURVE


ADJUST SIDE CURVE under ADJUST SHAPE allows you to adjust two of the five preset options. These two options are PINCUSHION and BALANCED pincushion. Note: use these features only when the picture is not square.

- 1) Press the **⬅** button on the monitor. The MAIN CONTROLS window appears.


- 2) Press the **⬆** button until ADJUST SHAPE is highlighted.

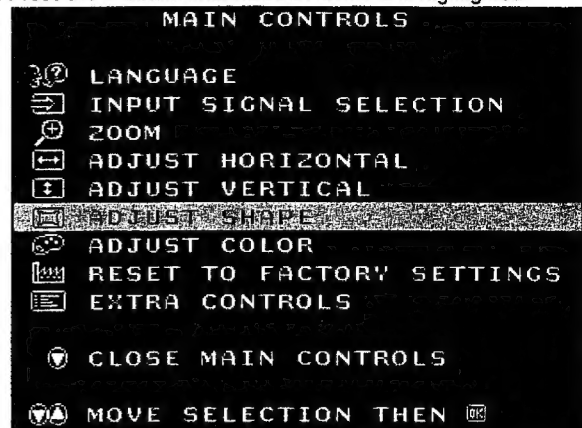


- 3) Press the **⬅** button. The ADJUST SHAPE window appears. ADJUST SIDE CURVE should be highlighted.

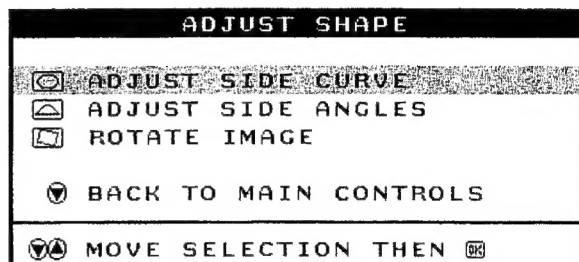

- 4) Press the **⬅** button. The SIDE CURVE window appears. PINCUSHION should be highlighted.

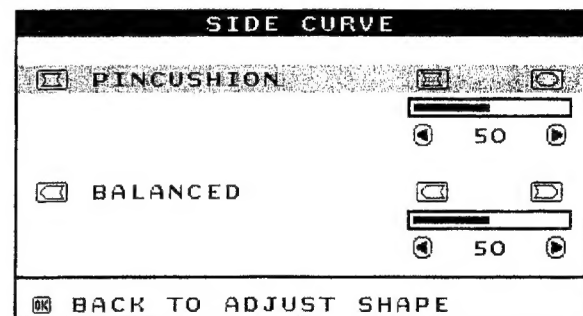

- 5) To adjust the pincushion, press the **⬆** or **⬇** button.  
 6) When the pincushion is adjusted, press the **⬅** button to highlight BALANCED or press the **⬅** button to return to the ADJUST SHAPE window.

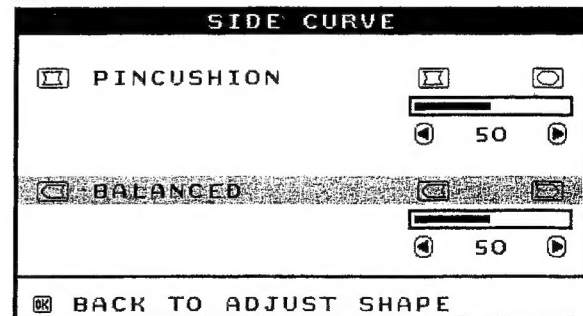

- 7) To adjust the balanced pincushion, press the **⬆** or **⬇** button.  
 8) When the balanced pincushion is adjusted, press the **⬅** button to return to the ADJUST SHAPE window. BACK TO MAIN WINDOWS will be highlighted.  
 9) Press the **⬅** button to return to the MAIN CONTROLS window, or press the **⬆** button until ADJUST SIDE ANGLES is highlighted.



Smart Help After returning to MAIN CONTROLS ...

...to continue to ADJUST SIDE ANGLES, start with step 5 under ADJUST SIDE ANGLES and follow the directions.

...to exit completely, press the button twice.

...to adjust only the BALANCED pincushion, follow steps 1 - 4 above, then press the button, and follow steps 7 - 9.


...to adjust only the PARALLELOGRAM, follow steps 1 - 4 above, then press the button, and follow steps 7 - 9

## ADJUST SIDE ANGLES


ADJUST SIDE ANGLES under ADJUST SHAPE allows you to adjust two of the five preset options. These two options are TRAPEZOID and PARALLELOGRAM. Note: use these features only when the picture is not square.

1) Press the button on the monitor. The MAIN CONTROLS window appears.

2) Press the button until ADJUST SHAPE is highlighted.

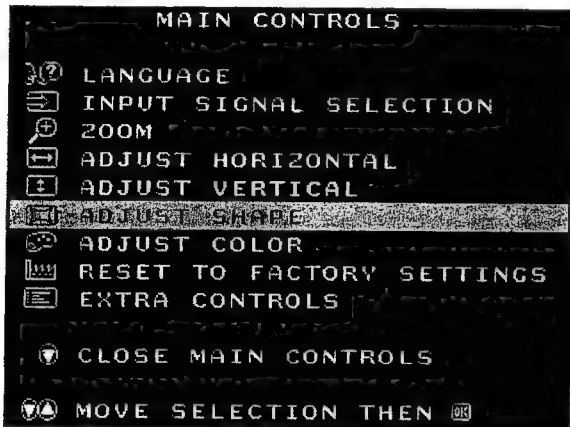


3) Press the button. The ADJUST SHAPE window appears. ADJUST SIDE CURVE should be highlighted.

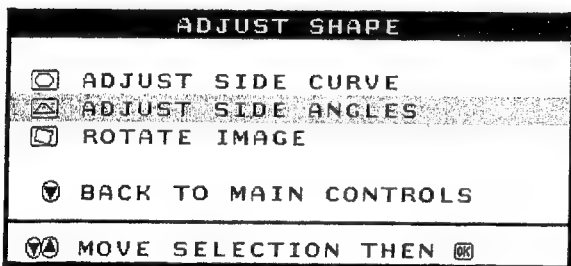


4) Press the button to highlight ADJUST SIDE ANGLES.

5) Press the button. The SIDE ANGLES window appears. TRAPEZOID should be highlighted.

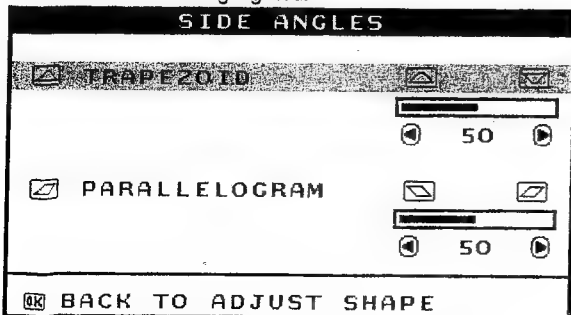

6) To adjust the trapezoid, press the or button. SHAPE window.

7) When the trapezoid is adjusted, press the button to highlight PARALLELOGRAM or press the button to return to the ADJUST

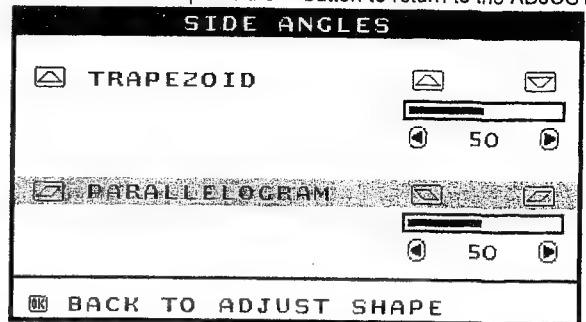

8) To adjust the parallelogram, press the or button.

9) When the parallelogram is adjusted, press the button to return to the ADJUST SHAPE window. BACK TO MAIN WINDOWS will be highlighted.

10) Press the button to return to the MAIN CONTROLS window, or press the button until ROTATE IMAGE is highlighted.

Smart Help After returning to MAIN CONTROLS ...

...to continue to ROTATE IMAGE, start with step 5 under ROTATE IMAGE and follow the directions.

...to exit completely, press the button twice.


...to adjust only the PARALLELOGRAM, follow steps 1 - 4 above, then press the button, and follow steps 7 - 9

## ROTATE IMAGE

ROTATE IMAGE under ADJUST SHAPE allows you to adjust one of the five preset options. These two options are PINCUSHION and BALANCED pincushion. Note: use this feature only when the picture is not square.


1) Press the button on the monitor. The MAIN CONTROLS window appears.

2) Press the button until ADJUST SHAPE is highlighted.

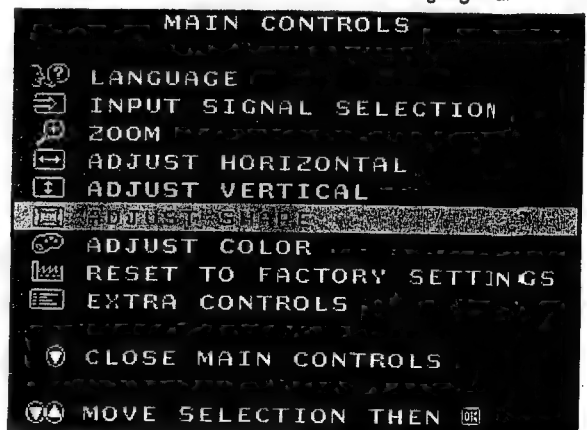


3) Press the button. The ADJUST SHAPE window appears. ADJUST SIDE CURVE should be highlighted.

4) Press the arrow until ROTATE IMAGE is highlighted

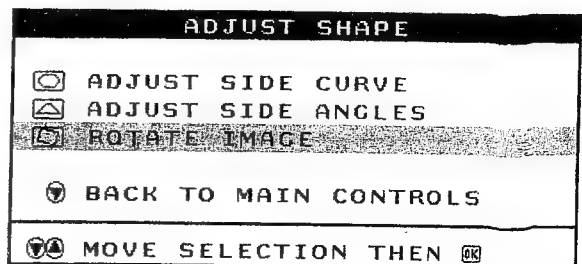

## OSD Adjustments (Continued)

- 5) Press the **⬅** button. The ROTATE IMAGE window appears. ROTATE should be highlighted.

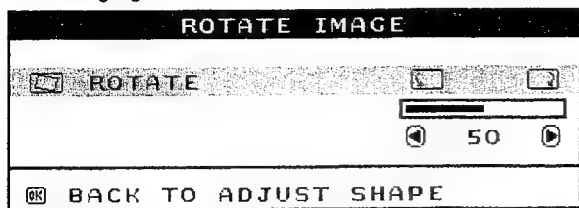

- 6) To adjust the rotation, press the **⬅** or **➡** button.  
 7) When the rotation is adjusted, press the **⬅** button to return to the ADJUST SHAPE window. BACK TO MAIN CONTROLS should be highlighted.  
 8) Press the **⬅** button to return to MAIN CONTROLS.

Smart Help After returning to MAIN CONTROLS...


... to continue to ADJUST COLOR, press the **⬅** button until ADJUST COLOR is highlighted. Next, start with step 3 under ADJUST COLOR and follow the directions.

...to exit completely, press the **⬅** button twice.


## ADJUST COLOR

Your monitor has two preset options you can choose from. The first option is for GENERAL USE, which is fine for most applications. The second option is for GAMES, which is for playing computer games. When you select one of these options, the monitor automatically adjusts itself to that option. There is also a third option, USER PRESET, which allows you to adjust the colors on your screen to a setting you desire.

- 1) Press the **⬅** button on the monitor. The MAIN CONTROLS window appears.  
 2) Press the **⬅** button until ADJUST COLOR is highlighted.

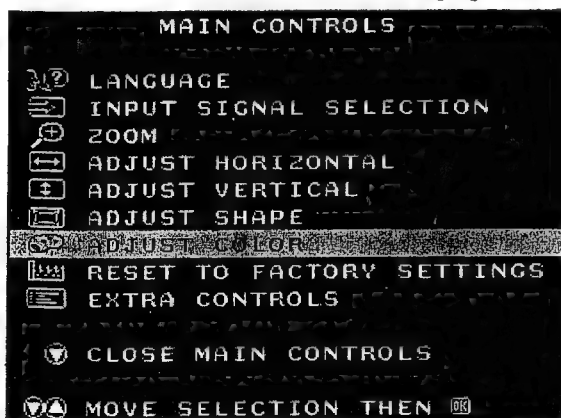


- 3) Press the **⬅** button. The ADJUST COLOR window appears.

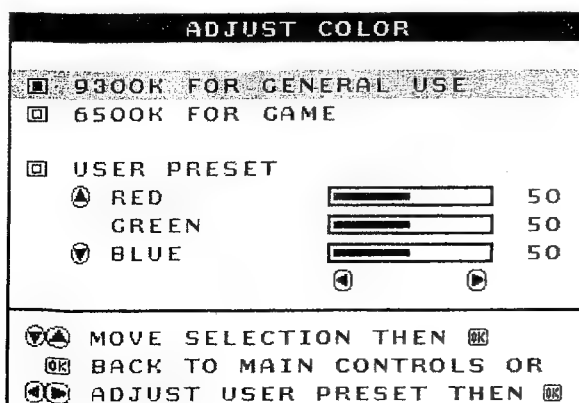

- 4) Press the **⬅** or **➡** button to highlight 9300K for GENERAL USE, 6500K for GAMES, or USER PRESET.

- 5) Once you have highlighted GENERAL USE or GAMES, press the **⬅** button to confirm your selection and return to the MAIN CONTROLS window. CLOSE MAIN CONTROLS will be highlighted.

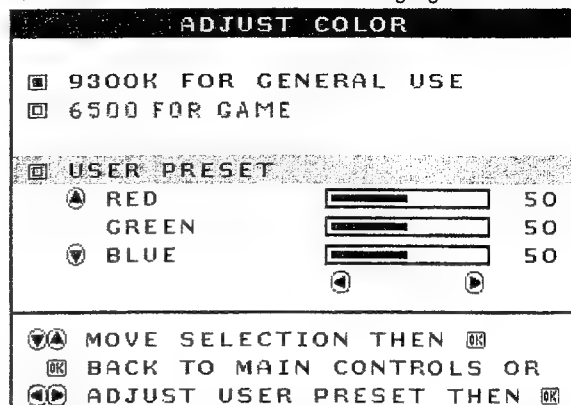

- 6a) If USER PRESET is highlighted, press the **⬅** button to highlight RED. Next, press the LEFT CURSOR or RIGHT CURSOR button to adjust the color red.

- 6b) When finished with RED, press the **⬅** button to highlight GREEN. Next, press the **⬅** or **➡** button to adjust the color green.

- 6c) When finished GREEN, press the **⬅** button to highlight BLUE. Next, press the **⬅** or **➡** button to adjust the color blue.

- 6d) When all adjustments are complete, press the **⬅** button to confirm your adjustments and return to the MAIN CONTROLS window. CLOSE MAIN CONTROLS will be highlighted.

Smart Help After returning to MAIN CONTROLS...


... to continue to RESET TO FACTORY SETTINGS, press the **⬅** button until RESET TO FACTORY SETTINGS is highlighted. Next, start with step 3 under RESET TO FACTORY SETTINGS.

... to exit completely, press the **⬅** button.

## RESET TO FACTORY SETTINGS

RESET TO FACTORY SETTINGS returns everything in all the windows to factory presets.

- 1) Press the **⬅** button on the monitor. The MAIN CONTROLS window appears.  
 2) Press the **⬅** button until RESET TO FACTORY SETTINGS is highlighted.

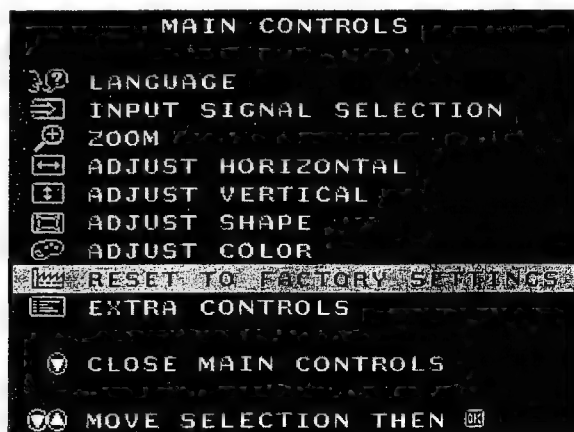


- 3) Press the **⬅** button. The RESET TO FACTORY SETTINGS window appears.

## OSD Adjustments (Continued)

13

- 4) Press the  $\leftarrow$  or  $\rightarrow$  button to select YES or NO. NO is the default. YES returns all settings to their original factory adjustments.

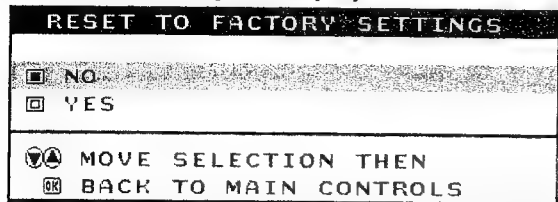

- 5) Press the  $\star$  button to confirm your selection and return to the MAIN CONTROLS window. CLOSE MAIN CONTROLS will be highlighted.

Smart Help After returning to MAIN CONTROLS...

... to continue to EXTRA CONTROLS, press the  $\leftarrow$  button until EXTRA CONTROLS is highlighted. Next, start with step 3 under EXTRA CONTROLS.


... to exit completely, press the  $\star$  button.

### EXTRA CONTROLS


#### DEGAUSS

EXTRA CONTROLS is a set of three features, including DEGAUSS. Degaussing removes electromagnetic build up that may distort the color on your screen.

- 1) Press the  $\star$  button on the monitor. The MAIN CONTROLS window appears.
- 2) Press the  $\leftarrow$  button until EXTRA CONTROLS is highlighted.

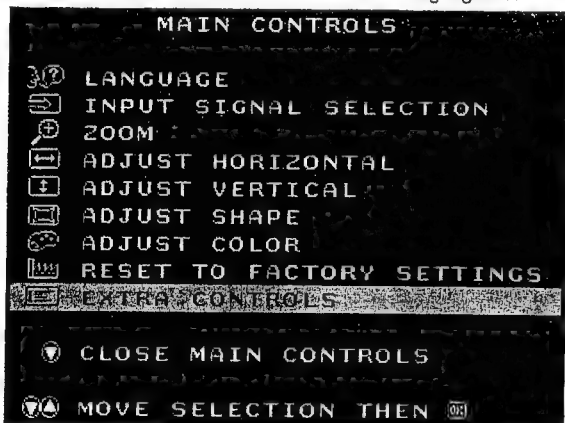

- 3) Press the  $\star$  button. The EXTRA CONTROLS window appears. DEGAUSS will be highlighted.

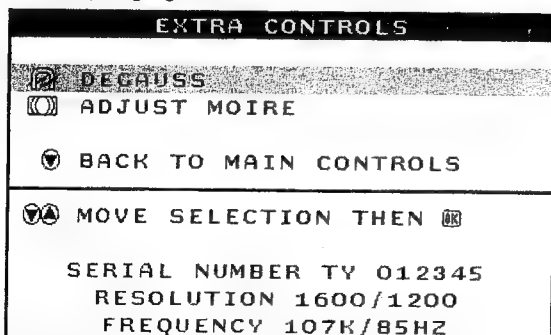

- 4) To degauss your screen, press the  $\star$  button. Your screen will be degaussed, then the MAIN CONTROLS window will reappear. CLOSE MAIN CONTROLS will be highlighted.

Smart Help After returning to MAIN CONTROLS...


... to continue to ADJUST MOIRE, press the  $\leftarrow$  button until EXTRA CONTROLS is highlighted. Next, start with step 3 under EXTRA CONTROLS, ADJUST MOIRE.

... to exit completely, press the  $\star$  button.

### ADJUST MOIRE


EXTRA CONTROLS is a set of three features, including ADJUST MOIRE. Moire is a fringe pattern arising from the interference between two superimposed line patterns. To adjust your moire, follow the steps below. Note: Use only if necessary. By activating ADJUST MOIRE, sharpness can be affected.

- 1) Press the  $\star$  button on the monitor. The MAIN CONTROLS window appears.
- 2) Press the DOWN CURSOR button until EXTRA CONTROLS is highlighted.

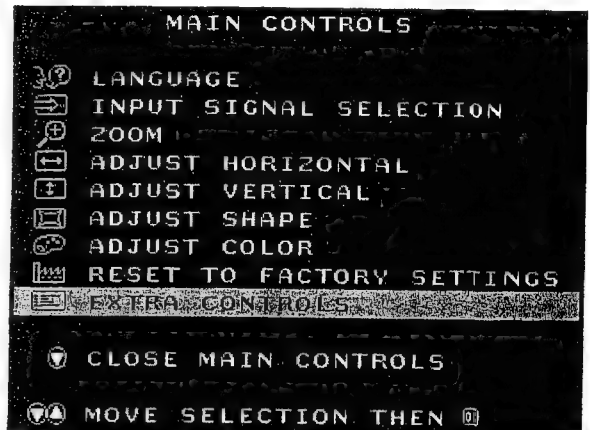


- 3) Press the  $\star$  button. The EXTRA CONTROLS window appears. DEGAUSS will be highlighted.

- 4) Press the  $\leftarrow$  button until ADJUST MOIRE is highlighted.

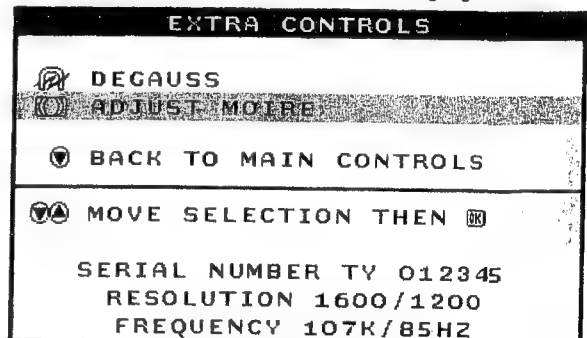


- 5) Press the  $\star$  button. The ADJUST MOIRE window appears. HORIZONTAL will be highlighted.

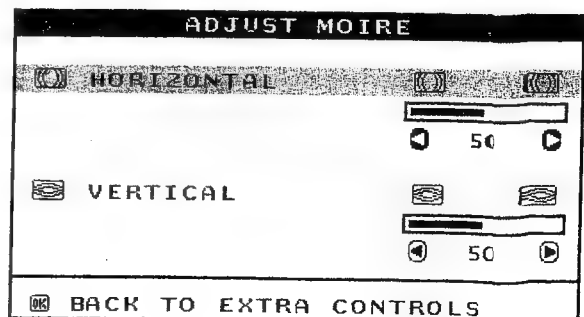

- 6) To adjust the horizontal moire, press the  $\leftarrow$  or  $\rightarrow$  button.

## OSD Adjustments (Continued)

7) When the horizontal moire is adjusted, press the button to highlight VERTICAL.

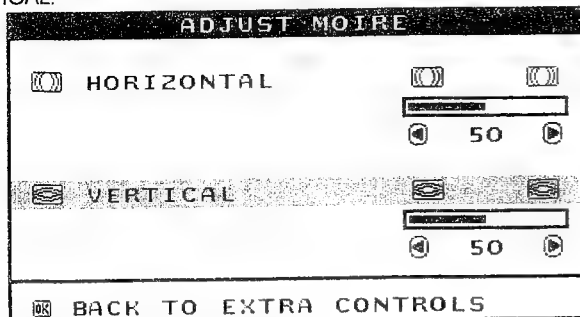


8) To adjust the vertical moire, press the or button.

9) When the vertical moire is adjusted, press the button to return to the EXTRA CONTROLS window. BACK TO MAIN CONTROLS will be highlighted.


### AUTO CALIBRATE

EXTRA CONTROLS is a set of three features, including AUTO CALIBRATE. Auto Calibrate regularly readjusts the color to its original value for any of the ADJUST COLOR selections, including USER PRESET. AUTO CALIBRATE also adjusts the luminance and black level of the monitor, so that all three items remain at original settings. This helps extend the useful life of the monitor. The calibration process takes less than 6 seconds to complete.


- 1) Press the button on the monitor. The MAIN CONTROLS window appears.
- 2) Press the button until EXTRA CONTROLS is highlighted.

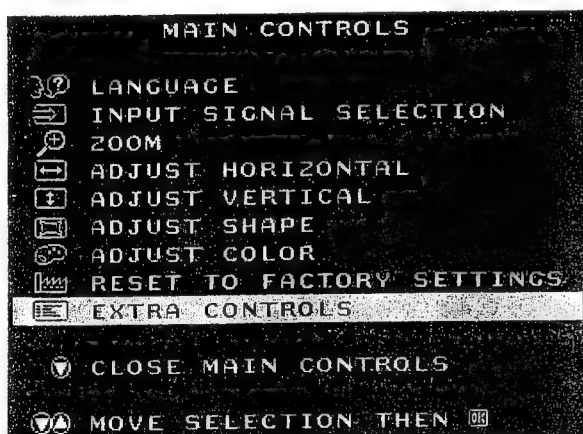

- 3) Press the button. The EXTRA CONTROLS window appears. DEGAUSS will be highlighted.
- 4) Press the button until AUTO CALIBRATE is highlighted.

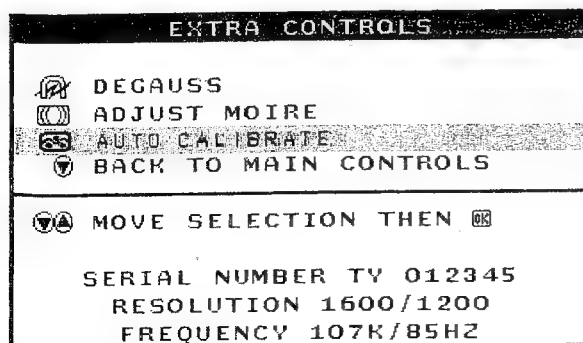

5) Press the button to select ON or OFF.

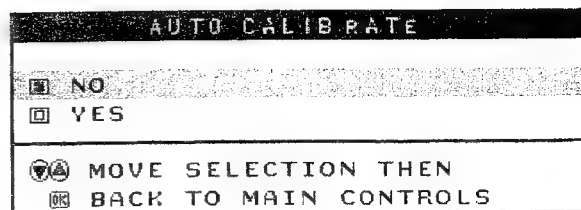

6) When the selection is made, press the button to confirm your selection and return to the MAIN CONTROLS window. CLOSE MAIN WINDOW will be highlighted.

7) Press the button to exit the MAIN CONTROLS window.

After returning to MAIN CONTROLS...

... to exit completely, press the button.


### INPUT SIGNAL SELECTION

INPUT SIGNAL SELECTION determines what you see on the screen. The default setting is INPUT A, but if the video input signal is different than the output signal, you may want to change it to INPUT B.

- 1) Press the button on the monitor. The MAIN CONTROLS window appears.
- 2) Press the button until INPUT SIGNAL SELECTION is highlighted.



3) Press the button. The INPUT SIGNAL SELECTION window appears.

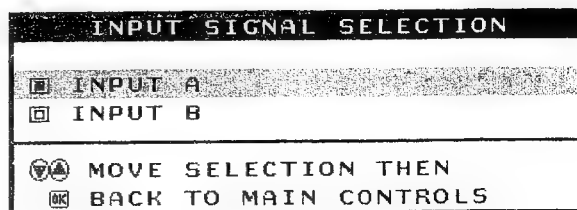


4) Press the or button to highlight INPUT B or INPUT A.


5) Press the button to confirm your selection and return to the MAIN CONTROLS window. CLOSE MAIN CONTROLS will be highlighted. After returning to MAIN CONTROLS...

After returning to MAIN CONTROLS to exit completely, press the  button.

CLOSE MAIN CONTROLS

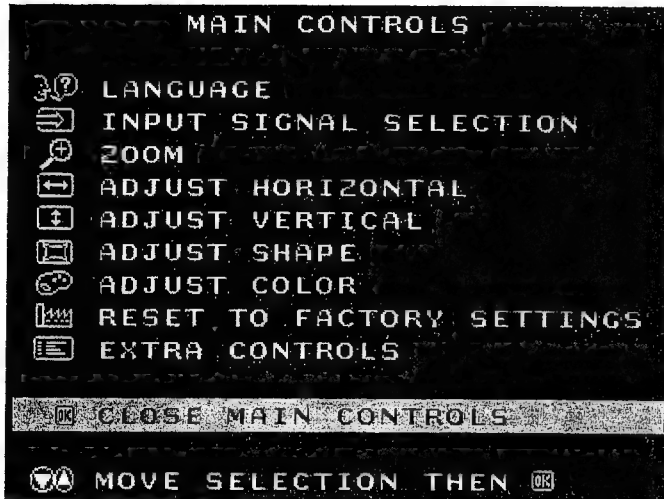


To lock (disable) OSD function:

- Press OSD button "  " for over 15 seconds to lock the OSD function. Release it, then OSD comes on the screen as below.




To unlock (enable) OSD function:

- Press OSD button "  " for over 10 seconds again to unlock the OSD function. Release it, then OSD comes on the screen as below.

Disable/Enable all the WARNING SIGNAL & Access Service mode (burn in mode) :

To disable all the WARNING SIGNAL :



- Disconnect the Interface cable of the monitor (Monitor is ON.).
- Press OSD button "  " for over 15 seconds to disable all the WARNING SIGNAL. Then release the "OSD" button.
- If it is successful, then the signal " NO SIGNAL INPUT " disappeared to enter power saving-off mode.

To enable all the WARNING SIGNAL :


- After disconnect the Interface cable of the monitor, then Monitor is powered ON.
- If it is successful, the signal " NO SIGNAL INPUT " comes on the screen again later.




Access Service Mode & Burn in mode

Firstly, get into Factory Adjustment Mode.

Push LEFT  & RIGHT  buttons at the same time for over 15 seconds and release them.

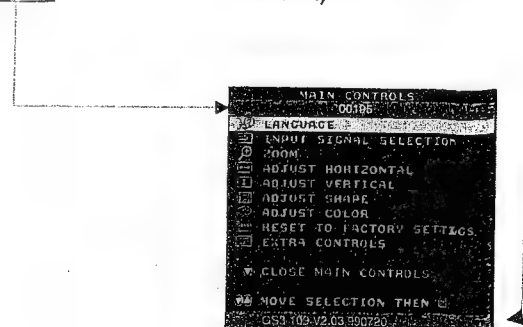The factory message appears at the bottom of the main OSD menu. (for example : GS3 109 V2.03 990720; 00195 is M.T.B.F. in HOUR unit)



- Disconnect the Interface cable of the monitor.
- Push LEFT  & RIGHT  buttons at the same time, then power ON.
- If it is successful, the signal "  " comes on the screen later. (Background is white.)

Leave "burn in MODE" :

- Reconnect the interface cable to PC, then the "burn in MODE" disappear.

## 0. Location of the panel

- 0.1 Main panel (1160)
- 0.2 Video panel (1162)

## 1. General

To be able to perform measurements and repairs on the "circuit boards", the monitor should be placed in Service Position (fig. 1) first:

*How to remove the back cover of monitor :*

There are 2 screws in the lid [1 screw are at the right side of the monitor, The other 1 screw are at the left side of the monitor], to fix the front cabinet and back cover of the monitor.

Step 1: To open the lid at the right-upper side and 1 screw in right-downer side of the monitor.(FIG.3)

Step 2: To open the lid at the left-upper side and 1 screw in left-downer side of the monitor.(FIG.4)

Step 3: To remove the backcover, you can see FIG.5

Step 4: To remove the 16 screws on the metal shield, and remove the metal shield, you can see FIG.6.

### Chassis :

- After remove the back cover & metal shield, you can see the inside of the monitor as Fig. 6.
- To remove 13 screws for service position as Fig. 6 to Fig. 8.
- Include remove bottom plate screw, then slide out chassis board and disconnect metal shield.

### Video panel :

- After remove the metal frame (Fig. 5), to remove the metal shield on rear side of Video panel for measurement.

### Main panel :

After remove the metal frame.

- To cut out cable tie and disconnect "video panel"
- To disconnect EHT cable
- To disconnect ground wire(1703) of video board.
- To disconnect M1311(4pin) to control panel.
- To disconnect M1501(4pin) yoke connector.
- To disconnect M1131(2pin) degaussing coil
- To slide out Main panel as Fig. 1.

### Service position :

To get service position as Fig. 1 through Fig. 2 to Fig. 8.

## 2. Repair instructions

After the service position was obtained, all the panel's copper track side could be accessed.

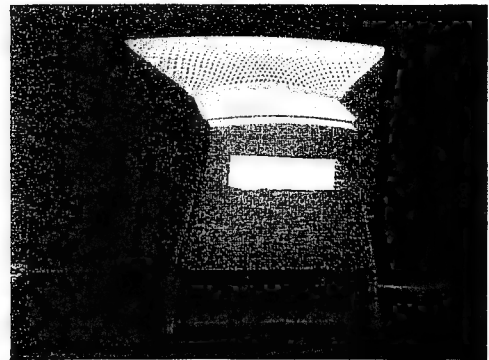


Fig. 2



Fig. 3




Fig. 4

screws  
lids  
screws




Fig. 5




Fig. 6

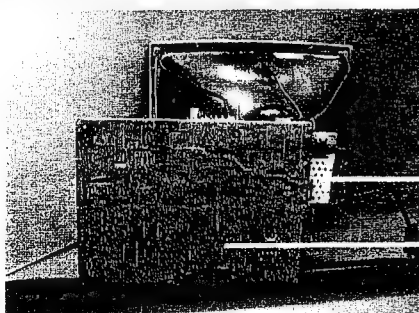


Fig. 1 Service Position




Fig. 7

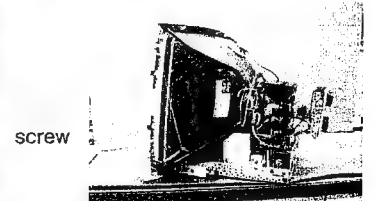



Fig. 8

screw



## 1. Safety Instructions for Repairs

### 1.1 Safety regulations require that during a repair:

- The set should be connected to the mains via an isolating transformer.
- Safety components, indicated by the symbol , should be replaced by components identical to the original ones.
- When replacing the CRT, safety goggles must be worn.

### 1.2 Safety regulations require also that after a repair:

- The set should be returned in its original condition.
- The cabinet should be checked for defects to avoid touching, by the customer, of inner parts.
- The insulation of the mains lead should be checked for external damage.
- The mains lead strain relief should be checked on its function.
- The cable form and EHT cable are routed correctly and fixed with the mounted cable clamps in order to avoid touching of the CRT, hot components or heat sinks.

\* Thermally loaded solder joints should be checked and resoldered where necessary. This includes components like LOT, the line output transistor, fly-back capacitor.

## 2. Maintenance Instructions

It is recommended to have a maintenance inspection carried out periodically by a qualified service employee. The interval depends on the usage conditions.

- During the maintenance inspection the above mentioned "safety instructions for repair" should be carried out. The power supply and deflection circuitry on the chassis, the CRT panel and the neck of the CRT should be cleaned.

When cleaning the monitor on the outside:

- Always disconnect the monitor from the mains.
  - Always use a damp AND NOT WET lint-free cloth.
  - To clean the screen, apply a household glass cleaner to a cloth and then wipe the screen.
  - Do not use solvents or abrasives on the monitor.
- It might discolour the cabinet and/or affect the anti glare treatment on your screen.

## 3. Warnings

3.1 In order to prevent damage to ICs and transistors, all high-voltage flash-overs must be avoided. In order to prevent damage to the picture tube, the method shown in Fig 3.1 should be used to discharge the picture tube. Use a high-voltage probe and a multimeter (position DC-V). Discharge until the meter reading is 0V (after approx 30s).

### 3.2 ESD

All ICs and many other semiconductors are sensitive to electrostatic discharges (ESD). Careless handling during repair can drastically shorten the life. Make sure that during repair you are connected by a pulse band with resistance to the same potential as the earth of the unit. Keep components and tools also at this same potential.

3.3 Be careful when taking measurements in the high-voltage section

and on the picture tube panel.

3.4 Never replace modules or other components while the unit is switched on.

3.5 When making settings, use plastic rather than metal tools. This will prevent any short-circuit and the danger of a circuit becomes unstable.

3.6 After repair the wiring should be fastened once more in the cable clamps for this purpose.

3.7 Together with the deflection unit the picture tube is used as an integrated unit. Adjustment of this unit during repair is therefore not recommended.

## 4. Notes

The semiconductors indicated in the circuit diagram(s) and in the parts lists are completely interchangeable per position with the semiconductors in the unit, irrespective of the type indication on these semiconductors.

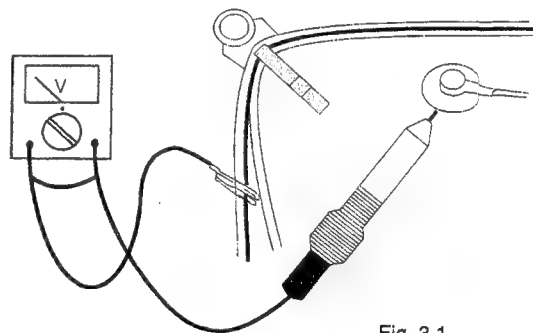


Fig. 3.1

## DDC DATA

HTCGS3.chk

## Vendor/Product Identification

ID Manufacturer Name : PHL  
 ID Product Code : 207A(HEX.)  
 ID Serial Number : 123456(DEC.)  
 Week of Manufacture : 35  
 Year of Manufacture : 1999

## EDID Version, Revision

Version : 1  
 Revision : 2

## Basic Display Parameters/Features

Video Input Definition : Analog Video Input  
 0.700V/0.000V (0.70Vpp)  
 without Blank-to-Black Setup  
 Separate Sync  
 Composite Sync  
 without Sync on Green  
 no Serration required

Maximum H Image Size : 41 cm

Maximum V Image Size : 31 cm

Display Transfer Characteristic: 2.66  
 (gamma)

Feature Support (DPMS) : Standby  
 Suspend  
 Active Off

Display Type : RGB color display

## Color Characteristics

Red X coordinate : 0.625  
 Red Y coordinate : 0.34  
 Green X coordinate : 0.285  
 Green Y coordinate : 0.605  
 Blue X coordinate : 0.15  
 Blue Y coordinate : 0.065  
 White X coordinate : 0.283  
 White Y coordinate : 0.298

## Established Timings

Established Timings I : 720 x 400 @70Hz (VGA,IBM)  
 640 x 480 @60Hz (VGA,IBM)  
 640 x 480 @72Hz (VESA)  
 640 x 480 @75Hz (VESA)  
 800 x 600 @60Hz (VESA)

Established timings II : 800 x 600 @72Hz (VESA)  
 800 x 600 @75Hz (VESA)  
 832 x 624 @75Hz (Mac II)  
 1024 x 768 @60Hz (VESA)  
 1024 x 768 @70Hz (VESA)  
 1024 x 768 @75Hz (VESA)  
 1280 x 1024 @75Hz (VESA)

Manufacturer's timings : 1152 x 870 @75Hz (Mac II)

## Standard Timing Identification #1

Horizontal active pixels : 1920  
 Aspect Ratio : 4:3  
 Refresh Rate : 60

## Standard Timing Identification #2

Horizontal active pixels : 1792  
 Aspect Ratio : 4:3  
 Refresh Rate : 75

## Standard Timing Identification #3

Horizontal active pixels : 1600  
 Aspect Ratio : 4:3  
 Refresh Rate : 75

## Standard Timing Identification #4

Horizontal active pixels : 1280  
 Aspect Ratio : 5:4  
 Refresh Rate : 85

## Standard Timing Identification #5

Horizontal active pixels : 1280  
 Aspect Ratio : 5:4  
 Refresh Rate : 60

## Standard Timing Identification #6

Horizontal active pixels : 1024  
 Aspect Ratio : 4:3  
 Refresh Rate : 85

## Detailed Timing #1

Pixel Clock (MHz) : 229.5  
 H Active (pixels) : 1600  
 H Blanking (pixels) : 560  
 V Active (lines) : 1200  
 V Blanking (lines) : 50  
 H Sync Offset (F Porch) (pixels): 64  
 H Sync Pulse Width (pixels) : 192  
 V Sync Offset (F Porch) (lines): 1  
 V Sync Pulse Width (lines) : 3  
 H Image Size (mm) : 392  
 V Image Size (mm) : 294  
 H Border (pixels) : 0  
 V Border (lines) : 0  
 Flags : Non-interlaced  
 Normal Display, No stereo  
 Digital Separate Sync  
 Positive V Sync  
 Positive H Sync

## Monitor Descriptor #2

Serial Number : TY 123456

## Monitor Descriptor #3

Monitor Name : Philips 201B

## Monitor Descriptor #4

Min. Vt rate Hz : 50  
 Max. Vt rate Hz : 160  
 Min. Horiz. rate kHz : 30  
 Max. Horiz. rate kHz : 107  
 Max. Supported Pixel : Not specified

Extension Flag : 0

Check sum : 78(hex)

\*\*\*\*\*  
 EDID data for HTC CRT  
 \*\*\*\*\*

0: 00 1: ff 2: ff 3: ff 4: ff 5: ff 6: ff 7: 00  
 8: 41 9: 0c 10: 7a 11: 20 12: 40 13: e2 14: 01 15: 00  
 16: 23 17: 09 18: 01 19: 02 20: 6c 21: 29 22: 1f 23: a6  
 24: e8 25: 00 26: b9 27: a0 28: 57 29: 49 30: 9b 31: 26  
 32: 10 33: 48 34: 4c 35: ad 36: ef 37: 80 38: d1 39: 40  
 40: c1 41: 4f 42: a9 43: 4f 44: 81 45: 99 46: 81 47: 80  
 48: 61 49: 59 50: 45 51: 59 52: 31 53: 59 54: a6 55: 59  
 56: 40 57: 30 58: 62 59: b0 60: 32 61: 40 62: 40 63: c0  
 64: 13 65: 00 66: 88 67: 26 68: 11 69: 00 70: 00 71: 1e  
 72: 00 73: 00 74: 00 75: ff 76: 00 77: 20 78: 54 79: 59  
 80: 20 81: 20 82: 31 83: 32 84: 33 85: 34 86: 35 87: 36  
 88: 0a 89: 20 90: 00 91: 00 92: 00 93: fc 94: 00 95: 50  
 96: 48 97: 49 98: 4c 99: 49 100: 50 101: 53 102: 20 103: 32  
 104: 30 105: 31 106: 42 107: 0a 108: 00 109: 00 110: 00 111: fd  
 112: 00 113: 32 114: a0 115: 1e 116: 6b 117: ff 118: 00 119: 0a  
 120: 20 121: 20 122: 20 123: 20 124: 20 125: 20 126: 00 127: 78

# DDC Instructions

19

There are two chips (IC) to store the serial number of monitor as below.

DDC IC (with EDID data)  
OSD IC (EEPROM)

To write the serial number of monitor to DDC IC and OSD IC simultaneously.  
Please follow the indications as below.

- Access the factory mode of monitor.
- Execute DDCV2A F0.EXE
- Follow DDC Instructions to write serial number to DDC IC and OSD IC.
- Turn off monitor (leave factory mode).
- Press OSD button, select MONITOR STATUS, verify the updated serial number of monitor.


To access factory mode:

- Turn off monitor (don't turn off PC)
- Hold " " and " " simultaneously on the front control panel, then press " ", wait till the OSD menu with characters "factory mode (below OSD menu)" come on the screen of monitor as shown in Fig. 1.
- If OSD menu disappears on the screen of monitor, press " " again (anytime), then the OSD menu comes on the screen again.
- using " ", " ": to select OSD menu.
- " ", " ": to increase or decrease the setting.
- Using " " to confirm the selection.

To leave factory mode

\* After alignment of factory mode, turn off monitor (if you do not turn off monitor, the OSD menu is always at the factory mode), then turn on monitor again (at this moment, the OSD menu goes back to user mode).

Fig 1



## DDC Instructions

This [DDC Module (DDC cable)= 4822 320 12004(=4822 724 27550)] and [DDC V2(DDCV2A .EXE) software(3.5" disk)=3138 106 10065 ] are used for "BU Monitor - Chungli product range" which incorporates a DDC1/DDC2B function that allows bi-directional communication between the monitor and PC system for optimal video configuration. [January 31 2000, Revision 3.3] , which upgrades the software and service information(4822 727 21027 & 4822 727 21038) , is fully compatible with previous one (DDCV2A F0.EXE).


Additional information :

Additional information about DDC (Display Data Channel) may be obtained from Video Electronics Standards Association (VESA).

Extended Display Identification (EDID) information may be also be obtained from VESA.


Pin assignment

The 15-pin D-sub connector (male) of the signal cable (3 rows) for DDC feature :



Pin No.	Assignment	Pin No.	Assignment
1	Red video input	9	No pin
2	Green video input	10	Logic ground
3	Blue video input	11	Connected to pin 10
4	Connected to pin 10	12	Serial data line (SDA)
5	Ground	13	H.sync/H+V
6	Red video ground	14	V. sync (VCLK for DDC)
7	Green video ground	15	Data clock line(SCL)
8	Blue video ground		

Connection

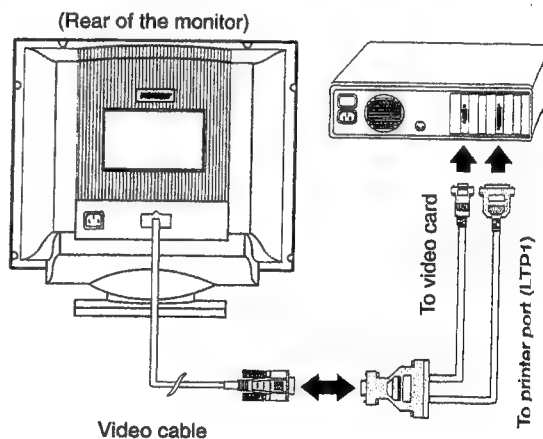

DDC data re-programming

### 1. General

In case the DDC data memory IC, replaced due to a defect the data contents of this IC have to be re-programmed via a PC. In case of replacement of the video (or deflection) board it is advised to re-soldered DDC IC from the old board onto the new board, in this case the IC dose not need to be re-programmed.

### 2. DDCV2A.EXE can be used for : EDID Structure Version/Revision

Version	: 1	(text file)
Revision	: 0	

and

Version	: 1	(.hex file)
Revision	: 2	

## DDC Reprogramming Instructions

### System Requirements

DDC Module (DDC cable), P/N = 4822 320 12004  
 An Intel 386 (or above) PC or compatible  
 DOS 6.0 or above  
 DDCV2A.EXE software

### Procedure

Connect DDC Cable between PC and Monitor.  
 Turn on Monitor and PC.  
 Access Factory Mode of monitor.  
 Verify Factory Mode by OSD function of monitor.  
 Insert diskette in Drive a: Select Run "DDCV2A.F0(Zero).EXE"  
 under DOS or Win. (hit the space bar "once")

Verify the data and version of DDC application software.  
 It should be : January 31 2000  
 Revision 3.3

Press "Enter" at the introduction screen

### Menu Configuration:




File	R/W	Setup	Quit
Load EDID	Write EDID to EEPROM	Options	
Load txt file (V1.0)	Read From EEPROM	Barcode format	
Save EDID	Edit EDID Code		
Save txt File	Auto Scan		
Convert EDID Code			
Os shell			
Exit			

### General :


#### 1. How to change drive

- Use arrow keys to highlight "Options" under the Setup menu, press "Enter".
- Press "F2", then press "ESC", fill in "A" or "C".  
 [(If your .HEX files for different Model numbers in drive "A", then fill in "A").,  
 (If your .HEX files for different Model numbers in drive "C", then fill in "C").  
 Normally, to read DDC data from EEPROM of Monitor is enough.]
- Press "Enter", then press "ESC"

#### 2. How to select .HEX files for different Model numbers example:

- Use arrow keys to highlight "Load EDID" under the File menu, press "Enter"
- Bring up  press "Enter"
- Bring up  ← select, press "Enter"
- Bring up  at this highlight area, press "Enter", then go back to last screen  
 00HTC.HEX ←select for 201B10/00(HTC CRT)

## How to write DDC hex files to Monitor

- Use arrow keys to highlight "Options" under the Setup menu, press "Enter"
- Tab down to ID Serial Number, use down arrow key to place the asterisk (\*) beside "store in DEC with LSB first". Press "control/enter" to save.  
 (Ensure the top asterisk (\*) is beside in store in HEX with LSB first.)
- Use arrow keys to highlight "Load EDID" under the file menu, press "Enter".
- Use arrow keys to highlight  Press "Enter".
- Use arrow keys to highlight "the model list under subdirect", press "Enter".
- Use arrow keys to highlight "Write EDID to EEPROM" under the R/W menu, press "Enter".
- Use arrow keys to highlight "Read from EEPROM" under the R/W menu, press "Enter".
- Use arrow keys to highlight "Edit EDID Code" under the R/W menu, press "Enter".
- Verify the ID Serial number on the screen matches the serial number of the unit.
- Verify EDID Structure Version is "Version :2, Revision :1"
- Press "ESC"
- Use arrow keys to highlight "Quit", Press "Enter".

### Menu Configuration:

File	R/W	Setup	Quit
Load EDID	Write EDID to EEPROM	Options	
Load txt file (V1.0)	Read From EEPROM	Barcode format	
Save EDID	Edit EDID Code		
Save txt File	Auto Scan		
Convert EDID Code			
Os shell			
Exit			

## DDC Instructions (Continued)

21

### How to change the Year, Week & Serial number of Monitor models]

① Use arrow keys to highlight "Barcode format", under the Setup menu, press "Enter".

② Bring up : Barcode example : 9925123456  
Barcode format : YYWWSSSSSS

← Fill in 9925123456, press "Enter"

← Fill in YYWWSSSSSS, press "Enter"

③ continued: Barcode example : 9925123456  
Barcode format : YYWWSSSSSS

---

Manufacture Year : 1999      press "space"  
Manufacture Week : 25  
Serial No. : 123456  
Serial No. ASCII : TY 123456

---

EDID [16] Week : 19  
EDID [17] Year : 09 [Year-1990]  
EDID [12..15] : 0001e240  
EDID [77-89] : TY □□□□□□  
data correct ? (Y/N) Y

Factory code for each site is as below.

Brazil	H C (48h,43h)
Chungli	T Y (54h,59h)
Delta	G K(47h,48h)
Juarez	Y A(59h,41h)
Shenzshen	C X(43h,58h)
Suzhou	BZ (42h,5Ah)
Szombathely	HD (48h,44h)

← Fill in "Y", don't press "Enter"

There is a description at the lower of the screen for Barcode format as below.

Barcode format : Y,W,S,X,- (year,week,s/no,ignore,fixed)

Y stands for "year".  
W stands for "week".  
S stands for "s/no (serial number)".  
X stands for "ignore". Allow user to fill in any 'character' or 'numeric'.  
- stands for "fixed". User have to fill in Special 'character' or 'numeric' for "AutoScan" if user fill in '-' at "Barcode format :".

④ Use arrow keys to highlight "Auto Scan" under the R/W menu, press "Enter".

⑤ Bring up: Auto Scan      ← year, week, serial number can be changed.

□ Serial Number  
◇ Year Code  
△ Week Code  
★ don't care

(If monitor is not at Factory Mode, access Factory Mode at this moment.)

⑥ Fill in "Barcode data (for instance: 9925123456)" beside AutoScan, press "Enter".  
After 10 seconds around, bring up:

File	R/W	Setup	Quit
Write EDID to EEPROM			
Read From EEPROM		◇◇△△□□□□□□	
Edit EDID Code		□	
Auto Scan		◇	
		△	
		★	
Factory writing ...100% (58) (f8) (7f) (12).			

⑦ Press "ESC" "ESC", return to R/W menu.

⑧ Select "Edit EDID code", press "Enter".

⑨ Verify "ID Serial No.".....

Turn off monitor, then turn on monitor again.

① Press OSD button, select "MONITOR STATUS", press )S D button again.

② Verify "SERIALNO".

(Leave OSD function).

③ Use arrow keys to highlight "QUIT", press "Enter".

## DDC Instructions (Continued)

## How to change the Year, Week & Serial number of Monitor models]

① Use arrow keys to highlight "Barcode format", under the Setup menu, press "Enter".

② Bring up : Barcode example : 993412345678  
Barcode format : YYWWSSSSSSSS

← Fill in 993412345678, press "Enter"

← Fill in YYWWSSSSSSSS, press "Enter"

③ continued:

Barcode example	:	993412345678	
Barcode format	:	YYWWSSSSSSSS	
-----			
Manufacture Year	:	1999	press "space"
Manufacture Week	:	34	
Serial No.	:	12345678	
Serial No. ASCII	:	TY 12345678	
=====			
EDID [16] Week	:	22	
EDID [17] Year	:	09 [Year-1990]	
EDID [12..15]	:	00bc614e	
EDID [77-89]	:	TY	□□□□□□
data correct? (Y/N) Y			

Factory code for each site is as below.

Brazil	H C (48h,43h)
Chungli	T Y (54h,59h)
Delta	G K(47h,4Bh)
Juarez	Y A(59h,41h)
Shenzshen	C X(43h,58h)
Suzhou	BZ (42h,5Ah)
Szombathely	HD (48h,44h)

← Fill in "Y", don't press "Enter"

There is a description at the lower of the screen for Barcode format as below.

Barcode format : Y,W,S,X,- (year,week,s/no,ignore,fixed)

Y stands for "year".

W stands for "week".

S stands for "s/no (serial number)".

X stands for "ignore". Allow user to fill in any 'character' or 'numeric'.

- stands for "fixed". User have to fill in Special 'character' or 'numeric' for "AutoScan" if user fill in '-' at "Barcode format :".

④ Use arrow keys to highlight "Auto Scan" under the R/W menu, press "Enter".

⑤ Bring up: Auto Scan

◇◇△△□□□□□□

← year, week, serial number can be changed.

□ Serial Number  
◇ Year Code  
△ Week Code  
★ don't care

(If monitor is not at Factory Mode, access Factory Mode at this moment.)

⑥ Fill in "Barcode data (for instance: 993412345678)" beside AutoScan, press "Enter".  
After 10 seconds around, bring up:

File	R/W	Setup	Quit
Write EDID to EEPROM			
Read From EEPROM		◇◇△△□□□□□□	
Edit EDID Code		□	
Auto Scan		◇	
		△	
		★	
Factory writing ...100% (58) (f8) (7f) (12).			

⑦ Press "ESC" "ESC", return to R/W menu.

⑧ Select "Edit EDID code", press "Enter".

⑨ Verify "ID Serial No." .....

Turn off monitor, then turn on monitor again.

① Press OSD button, select "MONITOR STATUS", press OSD button again.

② Verify "SERIALNO".

(Leave OSD function).

③ Use arrow keys to highlight "QUIT", press "Enter".



## 0. General

When carry-out the electrical settings in many cases a video signal must be applied to the monitor. A computer with :

- ATI GPT-1600 (4822 397 10065), Mach 64 (up to 107kHz)

are used as the video signal source. The signal patterns are selected from the "service test software" package, see user guide 4822 727 21046 (GPT-1600).

0.1 This monitor has 35 factory-preset modes as below

31.469 KHz/70.087 Hz, 640 X 350	81.250 KHz/65.000 Hz, 1600 X 1200
31.469 KHz/59.941 Hz, 640 X 480	83.640 KHz/59.999 Hz, 1792 X 1344
31.468 KHz/70.084 Hz, 720 X 400	85.938 KHz/85.002 Hz, 1280 X 960
37.5 KHz/75 Hz, 640 X 480	86.333 KHz/59.995 Hz, 1856 X 1392
37.861 KHz/72.810 Hz, 640 X 480	87.500 KHz/70.000 Hz, 1600 X 1200
37.861 KHz/85.081 Hz, 640 X 350	90.000 KHz/60.000 Hz, 1920 X 1440
37.879 KHz/60.317 Hz, 800 X 600	91.146 KHz/85.024 Hz, 1280 X 1024
37.927 KHz/85.039 Hz, 720 X 400	93.750 KHz/75.000 Hz, 1600 X 1200
43.269 KHz/85.008 Hz, 640 X 480	106.250 KHz/85.00 Hz, 1600 X 1200
46.875 KHz/75.000 Hz, 800 X 600	106.270 KHz/74.997 Hz, 1792 X 1344
48.077 KHz/72.188 Hz, 800 X 600	
48.363 KHz/60.004 Hz, 1024 X 768	
49.722 KHz/74.546 Hz, 832 X 624	
50.628 KHz/100.10 Hz, 640 X 480	
53.674 KHz/85.061 Hz, 800 X 600	
56.476 KHz/70.069 Hz, 1024 X 768	
60.000 KHz/60.000 Hz, 1280 X 960	
60.023 KHz/75.029 Hz, 1024 X 768	
63.923 KHz/100.00 Hz, 800 X 600	
63.981 KHz/60.020 Hz, 1280 X 1024	
67.500 KHz/75.00 Hz, 1152 X 864	
68.677 KHz/84.997 Hz, 1024 X 768	
68.681 KHz/74.979 Hz, 1152 X 870	
71.809 KHz/76.15 Hz, 1152 X 900	
75.000 KHz/60.000 Hz, 1600 X 1200	
79.976 KHz/75.024 Hz, 1280 X 1024	

0.2 With normal VGA card:

If not using the ATI card during repair or alignment, The service engineer also can use this service test software adapting with normal standard VGA adaptor and using standard VGA mode 640 x 480, 31.5 kHz/60 Hz (only) as signal source.

0.3 AC/DC Measurement:

The measurements for AC waveform and DC figure is based on 640 x 480 31.5 kHz/60 Hz resolution mode with test pattern "gray scale".

Power input: 110V AC

### 1. B+ supply voltage (3157) 210Vdc

- Apply a video signal in the 1024 x 768 with 68.7 kHz/85Hz mode.
- Select the "cross-hatch" pattern.
- Set the brightness control and the contrast control to the minimum position.
- Pre-set trimming potentiometer 3157(B+) and 3698(EHT) in mid-position.
- Set Vg2 (screen) to fully Counter-clockwise (zero beamcurrent).
- Connect a dc voltmeter between the joint of capacitor 2154 and ground (common ground).
- Set the B+ trimming potentiometer 3157 so that the reading on the dc voltmeter is 210 V +/- 0.2 Vdc.

### 2. High-voltage EHT (3698)

- Apply a video signal in the 1024 x 768 with 68.7 kHz/85Hz mode.
- Select the "cross-hatch" pattern.
- Set the brightness control and the contrast control to the minimum position.
- Turn off the power.

- Connect a "high-voltage voltmeter" between the high-voltage connection of the picture tube and earth.
- Turn on the power.
- Set the EHT trimming potentiometer 3661 so that the "high-voltage voltmeter" reads 27.0 kV +/- 0.2 kV.

- Turn off the power.
- Remove the "high-voltage voltmeter" from the picture tube.
- Turn on the power again.

### 3. Monitor the following auxiliary voltages.

SOURCE ACROSS C2362	+ 8.0V +/- 0.5 VDC
SOURCE ACROSS C2143	+ 5.0V +/- 0.5 VDC
SOURCE ACROSS C2361	+ 12.0V +/- 0.5 VDC
SOURCE ACROSS C2134	+ 15.0V +/- 1.0 VDC
SOURCE ACROSS C2137	- 15.0V +/- 1.0 VDC
SOURCE ACROSS D6148	+ 6.3V +/- 0.5 VDC
SOURCE ACROSS C2131	+ 210.0V +/- 1.5 VDC
SOURCE ACROSS C2133	+ 82.7V +/- 2.0 VDC

### 4. General conditions for alignment

- During all alignments, supply a distortion free AC mains voltage to set via an isolating transformer with low internal impedance.
- Align in pre-warmed condition, at least 30 minutes warm-up with nominal picture brightness.
- Purity, geometry and subsequent alignments should be carried out in magnetic cage with correct magnetic field.

Northern hemisphere : H=0, V=450+/-50 mG, Z=0

Southern hemisphere : H=0, V=-450+/-50 mG, Z=0

Equatorial Support : H=0, V=0 mG, Z=0


- All voltages are to be measured or applied with respect to ground.

Note: Do not use heatsink as ground.

- Adjust function controls " " to center position except for contrast control which should be set to MAX.

### 5. To access factory mode:

- Turn off monitor (don't turn off PC)
- Press " " and " " simultaneously on the front control panel, then press " ", wait till the OSD menu with characters " factory mode (below OSD menu)" come on the screen of monitor.



- If OSD menu disappears on the screen of monitor, press " " again (anytime), then the OSD menu comes on the screen again.
- using " " : to select OSD menu.
- using " " : to increase or decrease the setting.
- Using " " to confirm the selection.

## Electrical Adjustments (Continued)

### 6 To leave factory mode

- \* After alignment of factory mode, turn off monitor (if you do not turn off monitor, the OSD menu is always at the factory mode), then turn on monitor again (at this moment, the OSD menu goes back to user mode).




Fig. 2.2

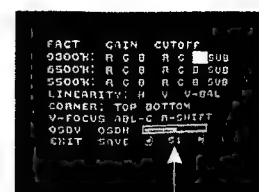


Fig. 2.3

### 7. Alignment of Vg2 cut-off point, white tracking (OSD control)

Equipment : 1. Video Test Generator-801GC (Quantum Data)  
2. Color-analyzer (Minolta CA-100)

Vg2 [(screen), at the bottom of the L.O.T.].

- \* Apply a video signal in the 1024 x 768 with 68.7 kHz/85 Hz mode, select the "full white pattern" (sizes 392 x 294 mm).
- \* Use color-analyzer (Minolta CA-100) to adjust cutoff and white uniformity.

OSD R/G/B cut-off and R/G/B gain can be accessed, with initial data:

9300°K

R cutoff = 30%, R gain = 70% (I'C)

G cutoff = 30%, G gain = 70% (I'C)

B cutoff = 30%, B gain = 70% (I'C)

6500°K

R cutoff = 30%, R gain = 70% (I'C)

G cutoff = 30%, G gain = 70% (I'C)

B cutoff = 30%, B gain = 70% (I'C)

5500°K

R cutoff = 30%, R gain = 70% (I'C)

G cutoff = 30%, G gain = 70% (I'C)

B cutoff = 30%, B gain = 70% (I'C)

Brightness = 50%, Sub-Contrast = 90%, ABL = 50% (I'C)

Step 1: To select the character "FACTORY MODE" as shown in Fig. 2.1, press " " to access the OSD menu for R/G/B gain & cutoff as shown in Fig. 2.2.

Step 2: Press " " for function selection as shown in Fig. 2.3.

Step 3: Use " " to increase or decrease the value as shown in Fig. 2.3.

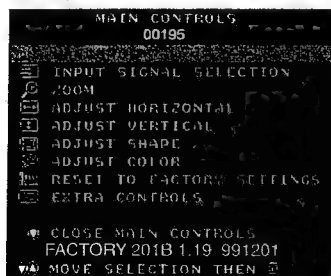


Fig.2.1

BIAS R G B : R(red) G(green) B(blue) cutoff  
GAIN R G B : R(red) G(green) B(blue) gain  
V FOCUS : Vertical Focus  
H FOCUS : Horizontal Focus  
VLIN BAL : Vertical Linearity Balance  
USER : Horizontal size range  
RASTER H: Horizontal raster Shift  
RASTER V: Vertical raster Shift  
HLIN : Horizontal Linearity  
V LIN : Vertical Linearity  
SUB : Zoom Control range  
SUB : Sub Contrast  
V OFFSET : Vertical offset  
V GAIN : Vertical Gain  
ABL : Auto Beam Limit  
T CORNER: Corner Correction of TOP  
B CORNER: Corner Correction of BOTTOM

After pressing " ", then Press " "

7.1 Connect the video input, set brightness control at 50% and contrast at minimum position (OSD), Vg2 at Minimum (counter clockwise, and ABL (OSD) at 50% position. Slowly increase Vg2 voltage until light output is at 0.1 Ft-L +/- 0.01Ft-L (Y=0.1 Ft-L, on the screen of CA-100).

7.2 (The screen of monitor is dark now)

- : Press " " to show the OSD menu as shown in Fig. 2.1.
- : Select the character "FACTORY MODE" to access the R/G/B adjustment as shown in Fig. 2.2 and Fig. 2.3.
- : Adjust the cutoff of R/G/B to get 9300K (x=0.283 +/- 0.015, y=0.297 +/- 0.015), and brightness output at 0.07 +/- 0.01 Ft-L (Y=0.07Ft-L).

7.3 : Press " " to set contrast at maximum (100%).

- : Adjust gain of R/G/B to get 9300K (x=0.283 +/- 0.015, y=0.297 +/- 0.015, don't care about the Y value)

7.4 Apply a small white square 10 x 10 cm pattern, brightness set to center (50%), and contrast at maximum (100%), adjust Sub-contrast control (OSD) to reach 32 +/- 2 Ft-L.

7.5 Apply full white pattern at 9300K, adjust ABL (OSD) to reach 32 +/- 2 Ft-L (contrast at maximum 100%, brightness at center 50%).

7.6 : Select the 6500K colour temperature as shown in Fig. 2.2.

: Adjust the R/G/B cutoff and R/G/B gain as shown in procedure 7.2~7.3 to get

R/G/B cutoff  $x = 0.313 \pm 0.015$   
 $y = 0.329 \pm 0.015$

R/G/B gain  $x = 0.313 \pm 0.015$   
 $y = 0.329 \pm 0.015$   
 $Y = 28 \pm 1$  Ft-L(Adjust Sub-contrast control (OSD))

7.7 : Select the 5500K colour temperature as shown in Fig. 2.2.

: Adjust the R/G/B cutoff and R/G/B gain as shown in procedure 7.2~7.3 to get

R/G/B cutoff  $x = 0.332 \pm 0.015$   
 $y = 0.347 \pm 0.015$

R/G/B gain  $x = 0.332 \pm 0.015$   
 $y = 0.347 \pm 0.015$   
 $Y = 25 \pm 1$  Ft-L(Adjust Sub-contrast control (OSD))

## 8. Picture geometry setting (factory pre-set modes)

- Apply a video signal with cross-hatch pattern.
- Apply a video signal in the 1024 x 768 with 68.7 kHz/85 Hz mode.
- Set brightness and contrast controls to their center positions (OSD control).

### 8.1 Horizontal geometry (OSD control)

- Adjust the H-width to 392 mm
- Adjust the H-phase to center position.

### 8.2 Vertical geometry (OSD control)

- Adjust vertical size to 294 mm
- Adjust V-phase to center position.

### 8.3 Trapezoid distortion (OSD control)

- Adjust the trapezoid to get optimal vertical lines.

### 8.4 Pincushion (OSD control)

- Adjust the pincushion to get optimal vertical line.

### 8.5 Parallelogram (OSD control)

- Adjust parallelogram so that vertical lines are vertical or symmetrically about the center vertical axis.

### 8.6 Unbalance-pin (OSD control)

- Adjust the unbalance-pin so that that vertical border lines are aligned symmetrically.

### 8.7 Rotation (OSD control)

- Adjust picture so that vertical tilt is less than  $\pm 0.5$ mm.

### 8.8 Top/Bottom corner(control)

- Adjust the top/bottom corner control to get optimum corner geometry.

### 8.9 Store the preset results by selecting the "exit" (OSD control).

8.10 Repeat the procedure 8.1 to 8.9 until all the preset timings have been adjusted completely

## 9. Focus adjustment

: Apply a video signal in the 1024 x 768 with 68.7 kHz/85 Hz mode

: Select " @ " pattern.

: Set the brightness at center (50%) and the contrast to 22 FL.

: Adjust focus potentiometers (top of L.O.T.) Focus 1 for horizontal focus and Focus 2 for vertical focus so that the picture at 2/3 of the diagonal lines (from center to four corners) of the displayed screen is as sharp as possible.




**10. Loading DDC code**The DDC HEX data should be written into the DDC IC by EEPROM writer or equivalent method.

#### a: Service DDC Kit

DDC Module (DDC cable), Part number = 4822 320 12004  
 DDCV2A.EXE software (3.5" disk), Part number = 3138 106 10065

b: Please refer to Service information 4822 727 21 027(4822 727 21038) for using the Service DDC Kit.


## Electrical Adjustments (Continued)

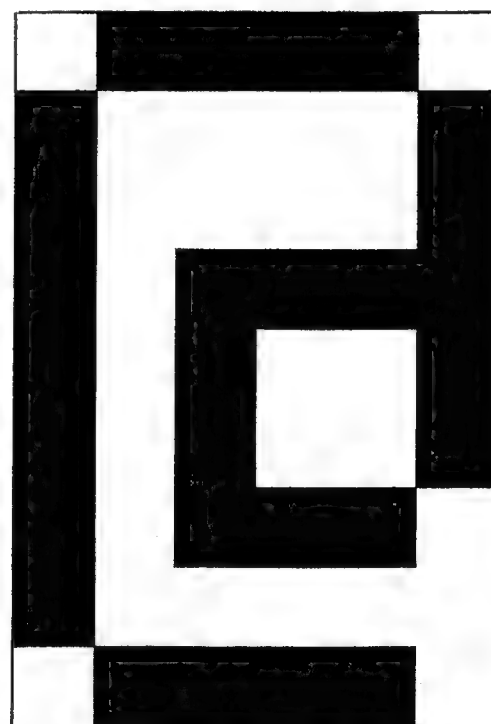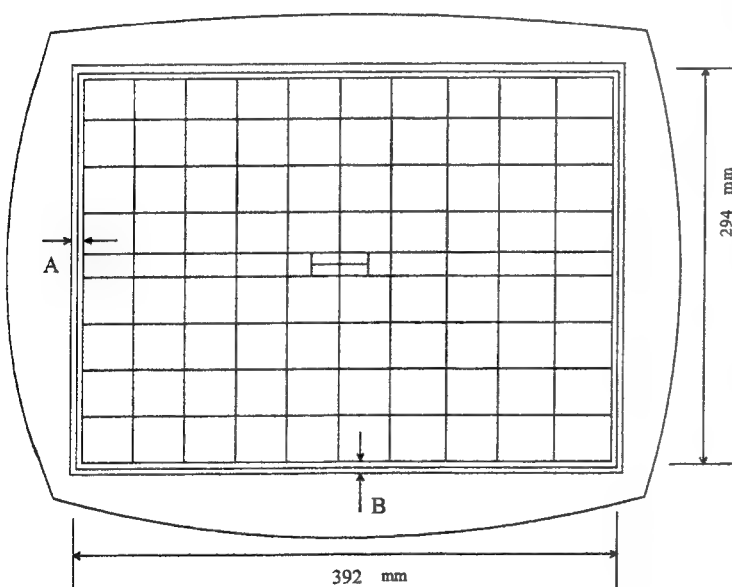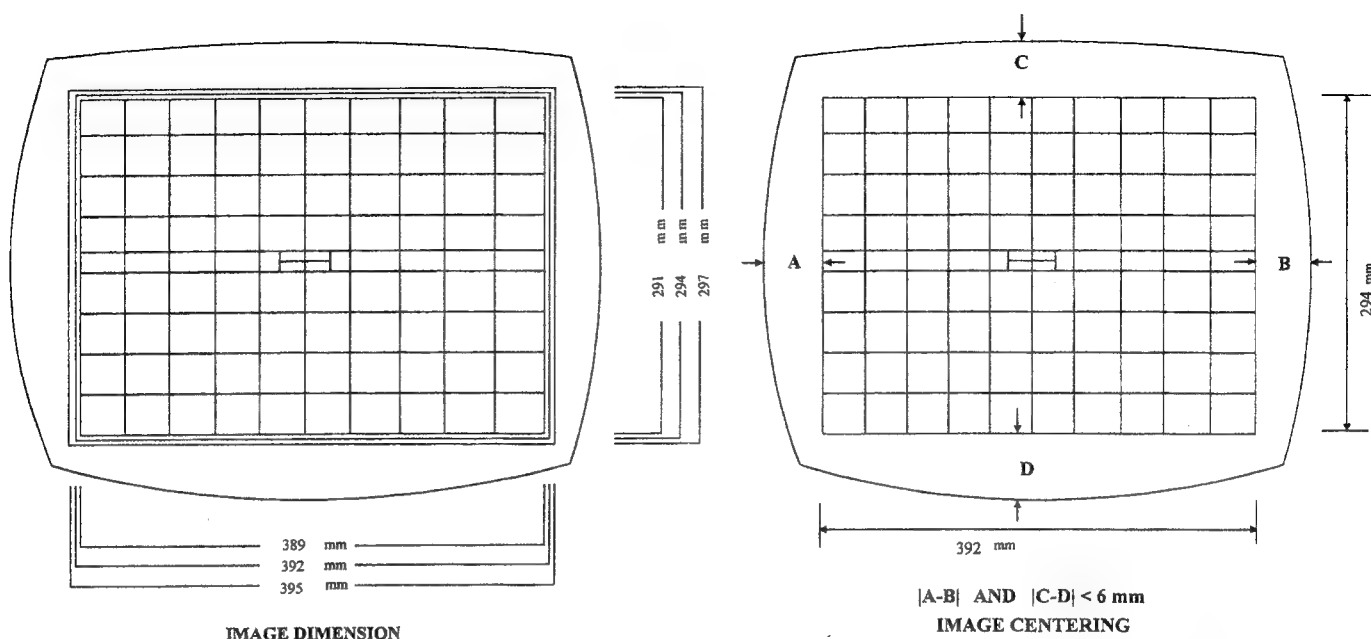

CHARACTER FORMAT FOR FOCUS CHECK

## 1. Purity adjustment

- Make sure the monitor is not exposed to any external magnetic field.
- Produce a full red pattern on the screen, adjust the purity magnet rings on the PCM assy (on CRT) to obtain a complete field of the color red. This is done by moving the two tabs (2-pole) in such a manner that they advance in an opposite direction but at the same time to obtain the same angle between the two tabs, which should be approximately 180 degree.
- Check by full green pattern and full blue pattern again to observe their respective color purity.

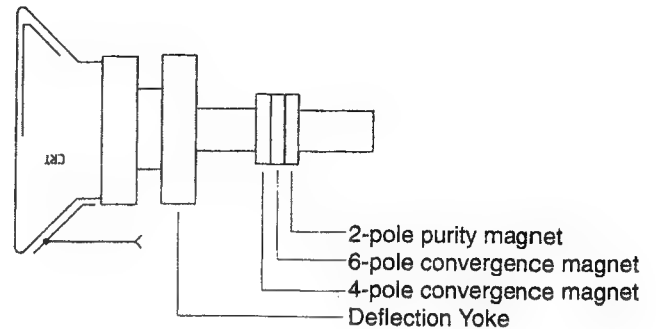

## 2. Static convergence

### Introduction


Slight deviation in the static convergence can be corrected by using two permanent pairs of magnets which are fitted around the neck of the CRT. These are the 4-pole magnet and the 6-pole magnet. The 4-pole magnet move the outermost electron beams (R and B) parallel in the opposite direction from the other. The 6-pole magnet moves the outermost electron beam (R, B and G) parallel in the opposite direction from the other. The magnetic field of the above magnets do not affect the center of the CRT neck.

### Setting

- Before the static convergence setting can be made, the monitor must be switched on for 30 minutes.
- The focus setting must be made correctly.
- Signal: 640 \* 480, 31.5 kHz/60 Hz mode.
- Set the tabs of the 4-pole magnet in the neutral position. This is when the tabs are opposite one another. In this position the magnets do not affect the deflection of the R and B electron beams.
- Set the tabs of the 6-pole magnet in the neutral position. This is when the tabs are opposite one another. In this position the magnets do not affect the deflection of the R, B, and G electron beams.
- First set the 4-pole magnet optimally.
- Then set the 6-pole magnet optimally.
- If the convergence is not now optimal, then adjust to the optimal setting with the 4-pole magnet and then with the 6- Pole magnet again.
- Set the tabs of the 6-pole magnet in the neutral position. This is when the tabs are opposite one another. In this position the magnets do not affect the deflection of the R, B, and G electron beams.
- First set the 4-pole magnet optimally.
- Then set the 6-pole magnet optimally.
- If the convergence is not now optimal, then adjust to the optimal setting with the 4-pole magnet and then with the 6- pole magnet again.


### 4-pole

Beam motion produced by the 4-pole convergence magnet

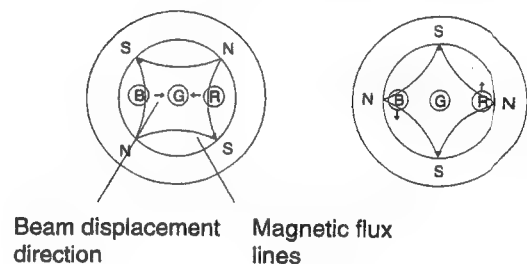

### 6-pole

Beam motion produced by the 6-pole convergence magnet

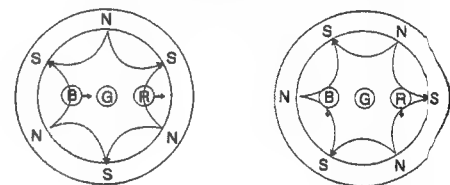

## Safety test requirements

All units that are returned for service or repair must pass the original manufactures safety tests. Safety testing requires both **Hipot** and **Ground Continuity** testing.

### HI-POT TEST INSTRUCTION

#### 1. Application requirements

- 1.1 All mains operated products must pass the Hi-Pot test as described in this instruction.
- 1.2 This test must be performed again after the covers have been refitted following the repair, inspection or modification of the product.

#### 2. Test method

##### 2.1 Connecting conditions

- 2.1.1 The test specified must be applied between the parallel-blade plug of the mains cord and all accessible metal parts of the product.
- 2.1.2 Before carrying out the test, reliable conductive connections must be ensured and thereafter be maintained throughout the test period.
- 2.1.3 The mains switch(es) must be in the "ON" position.

##### 2.2 Test Requirements

All products should be HiPot and Ground Continuity tested as follows:

Condition	HiPot Test for products where the mains input range is Full range(or 220V AC)	HiPot Test for products where the mains input is 110V AC(USA type)	Ground Continuity Test requirement
Test voltage	2820VDC (2000VAC)	1700VDC (1200VAC)	Test current: 25A,AC Test time: 3 seconds(min.) Resistance required: $\leq 0.09 + R$ ohm, R is the resistance of the mains cord.
Test time (min.)	3 seconds	1 second	
Trip current (Tester)	set at 100 uA for Max. limitation; set at 0.1 uA for Min. limitation	5 mA	
Ramp time	set at 2 seconds		

- 2.2.1 The test with AC voltage is only for production purpose, **Service center shall use DC voltage.**
- 2.2.2 The minimum test duration for Quality Control Inspector must be 1 minute. No breakdown during the test.
- 2.2.3 The test voltage must be maintained within the specified voltage + 5%.
- 2.2.4 The grounding blade or pin of mains plug must be conducted with accessible metal parts.

#### 3. Equipments and Connection


##### 3.1. Equipments

For example :

- ChenHwa 9032 PROGRAMMABLE AUTO SAFETY TESTER
- ChenHwa 510B Digital Grounding Continuity Tester
- ChenHwa 901 (AC Hi-pot test), 902 (AC, DC Hi-pot test) Withstanding Tester

##### 3.2. Connection

- \* Turn on the power switch of monitor before Hipot and Ground Continuity testing.

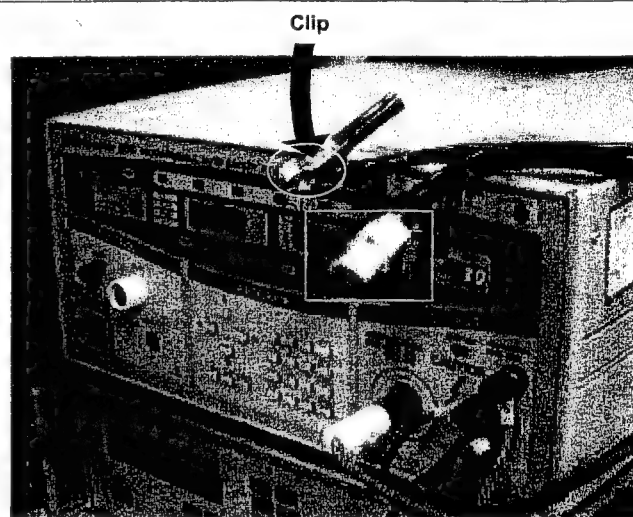


(ChenHwa 9032 tester)

Video cable



Connect the "video cable" or "grounding screw" to the CLIP on your tester.

Grounding screw

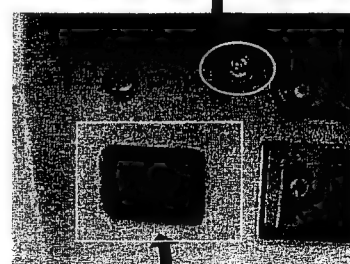

Connect the power cord to the monitor.

Power outlet


(Rear view of monitor)

#### 4. Recording


Hipot and Ground Continuity testing records have to be kept for a period of 10 years.




# Wiring Diagram

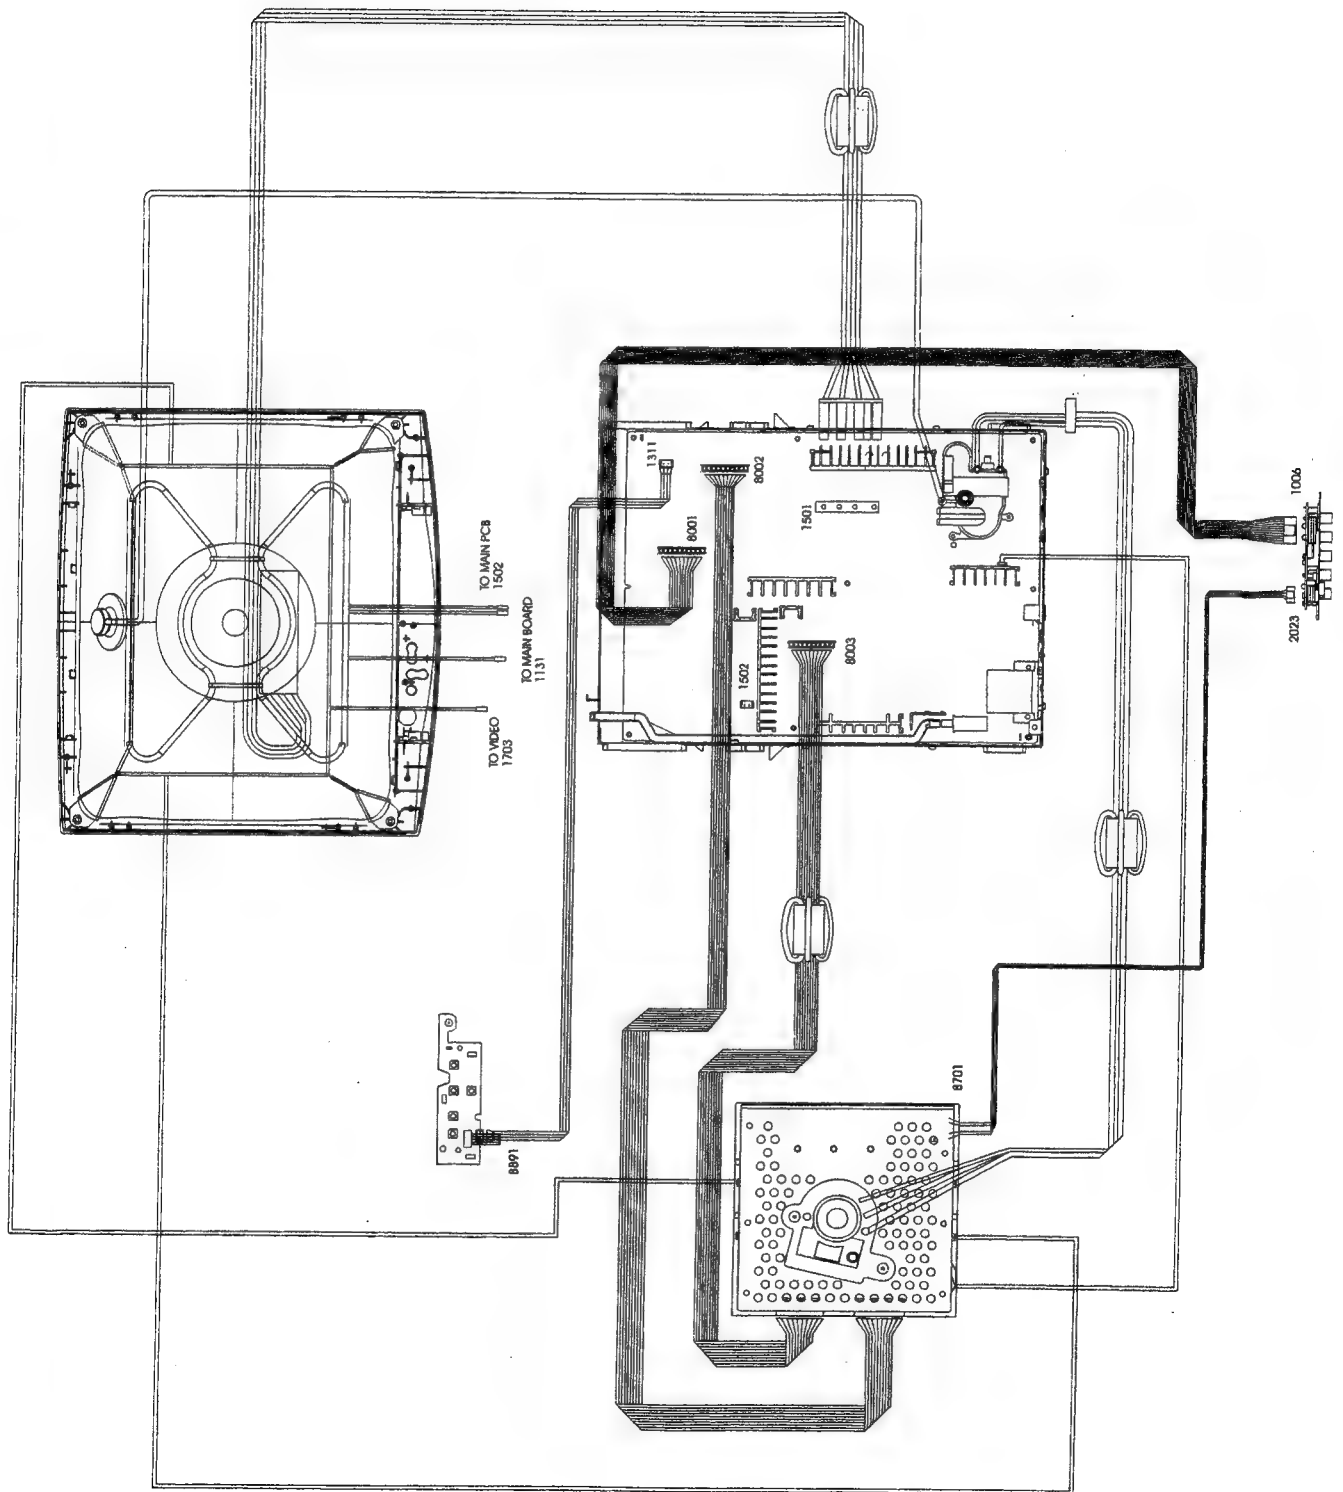


## Block Diagram

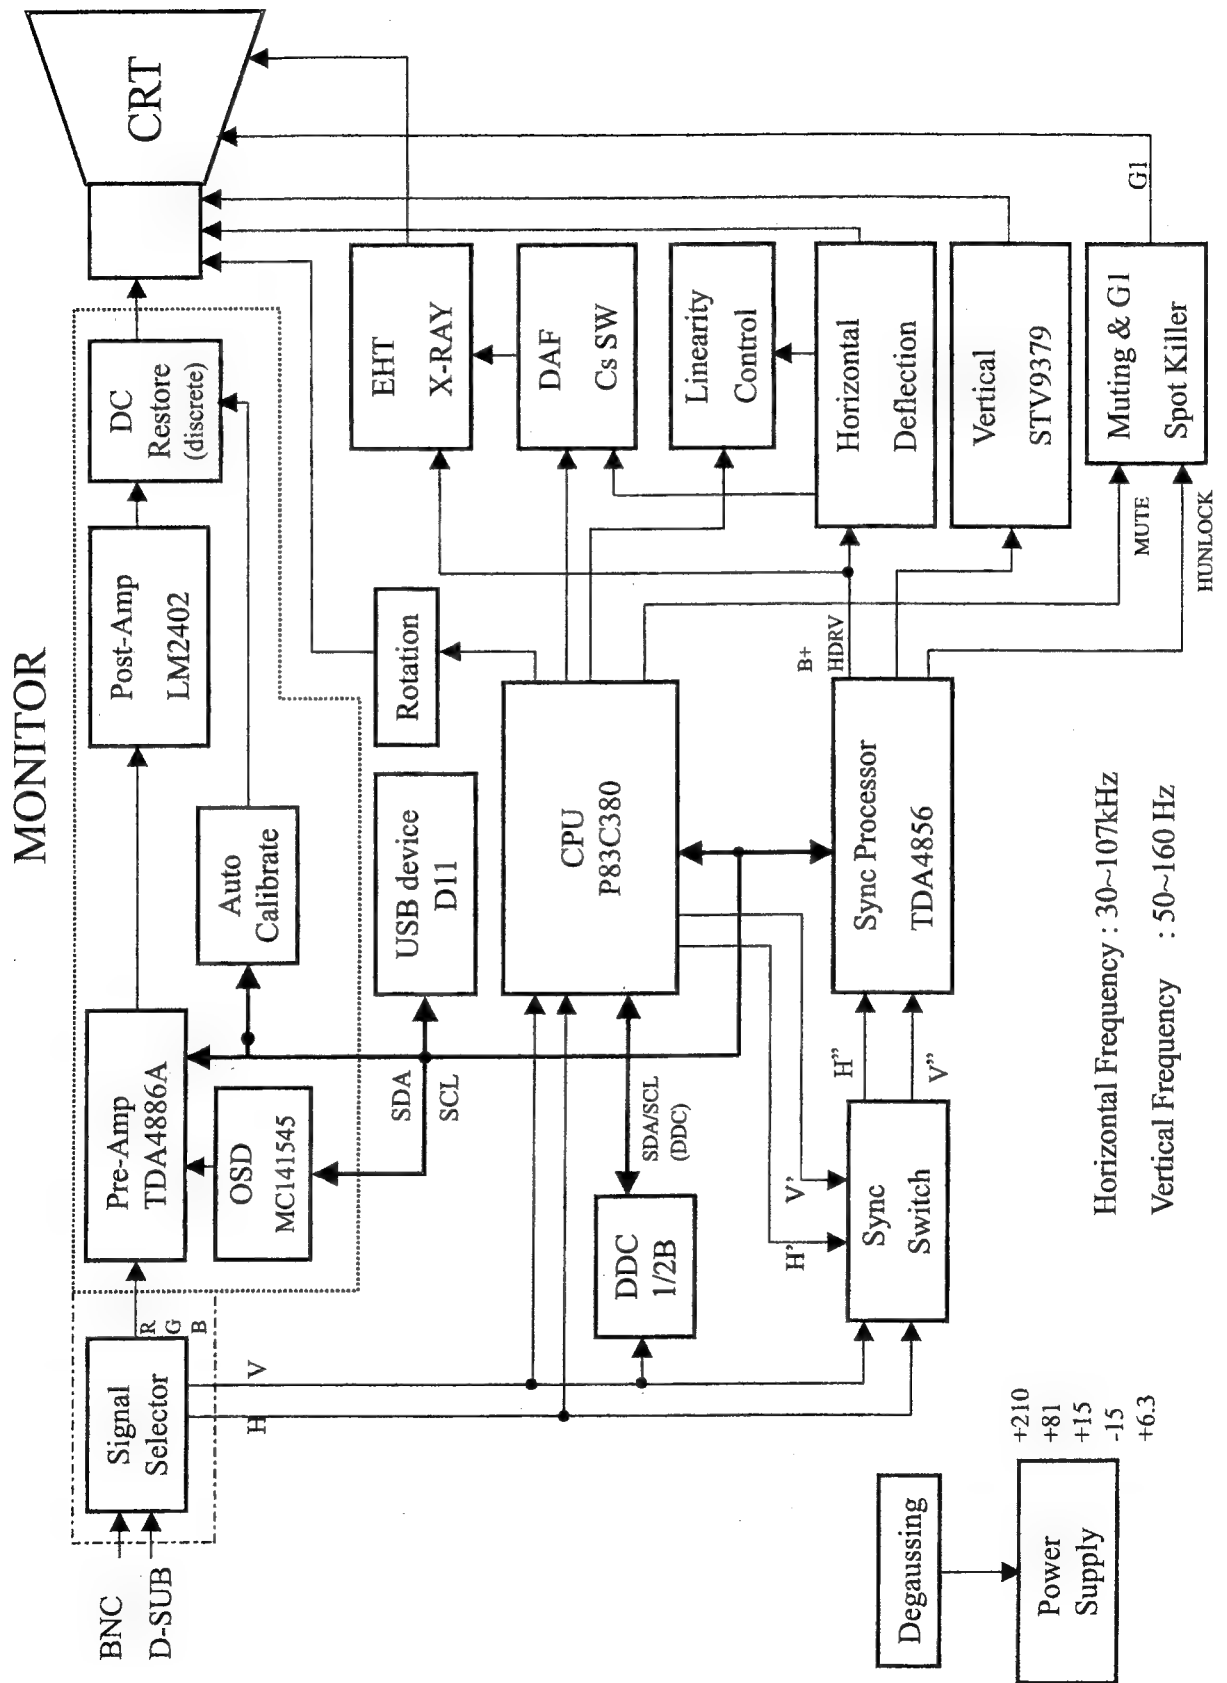


# Terminal Schematic Diagram

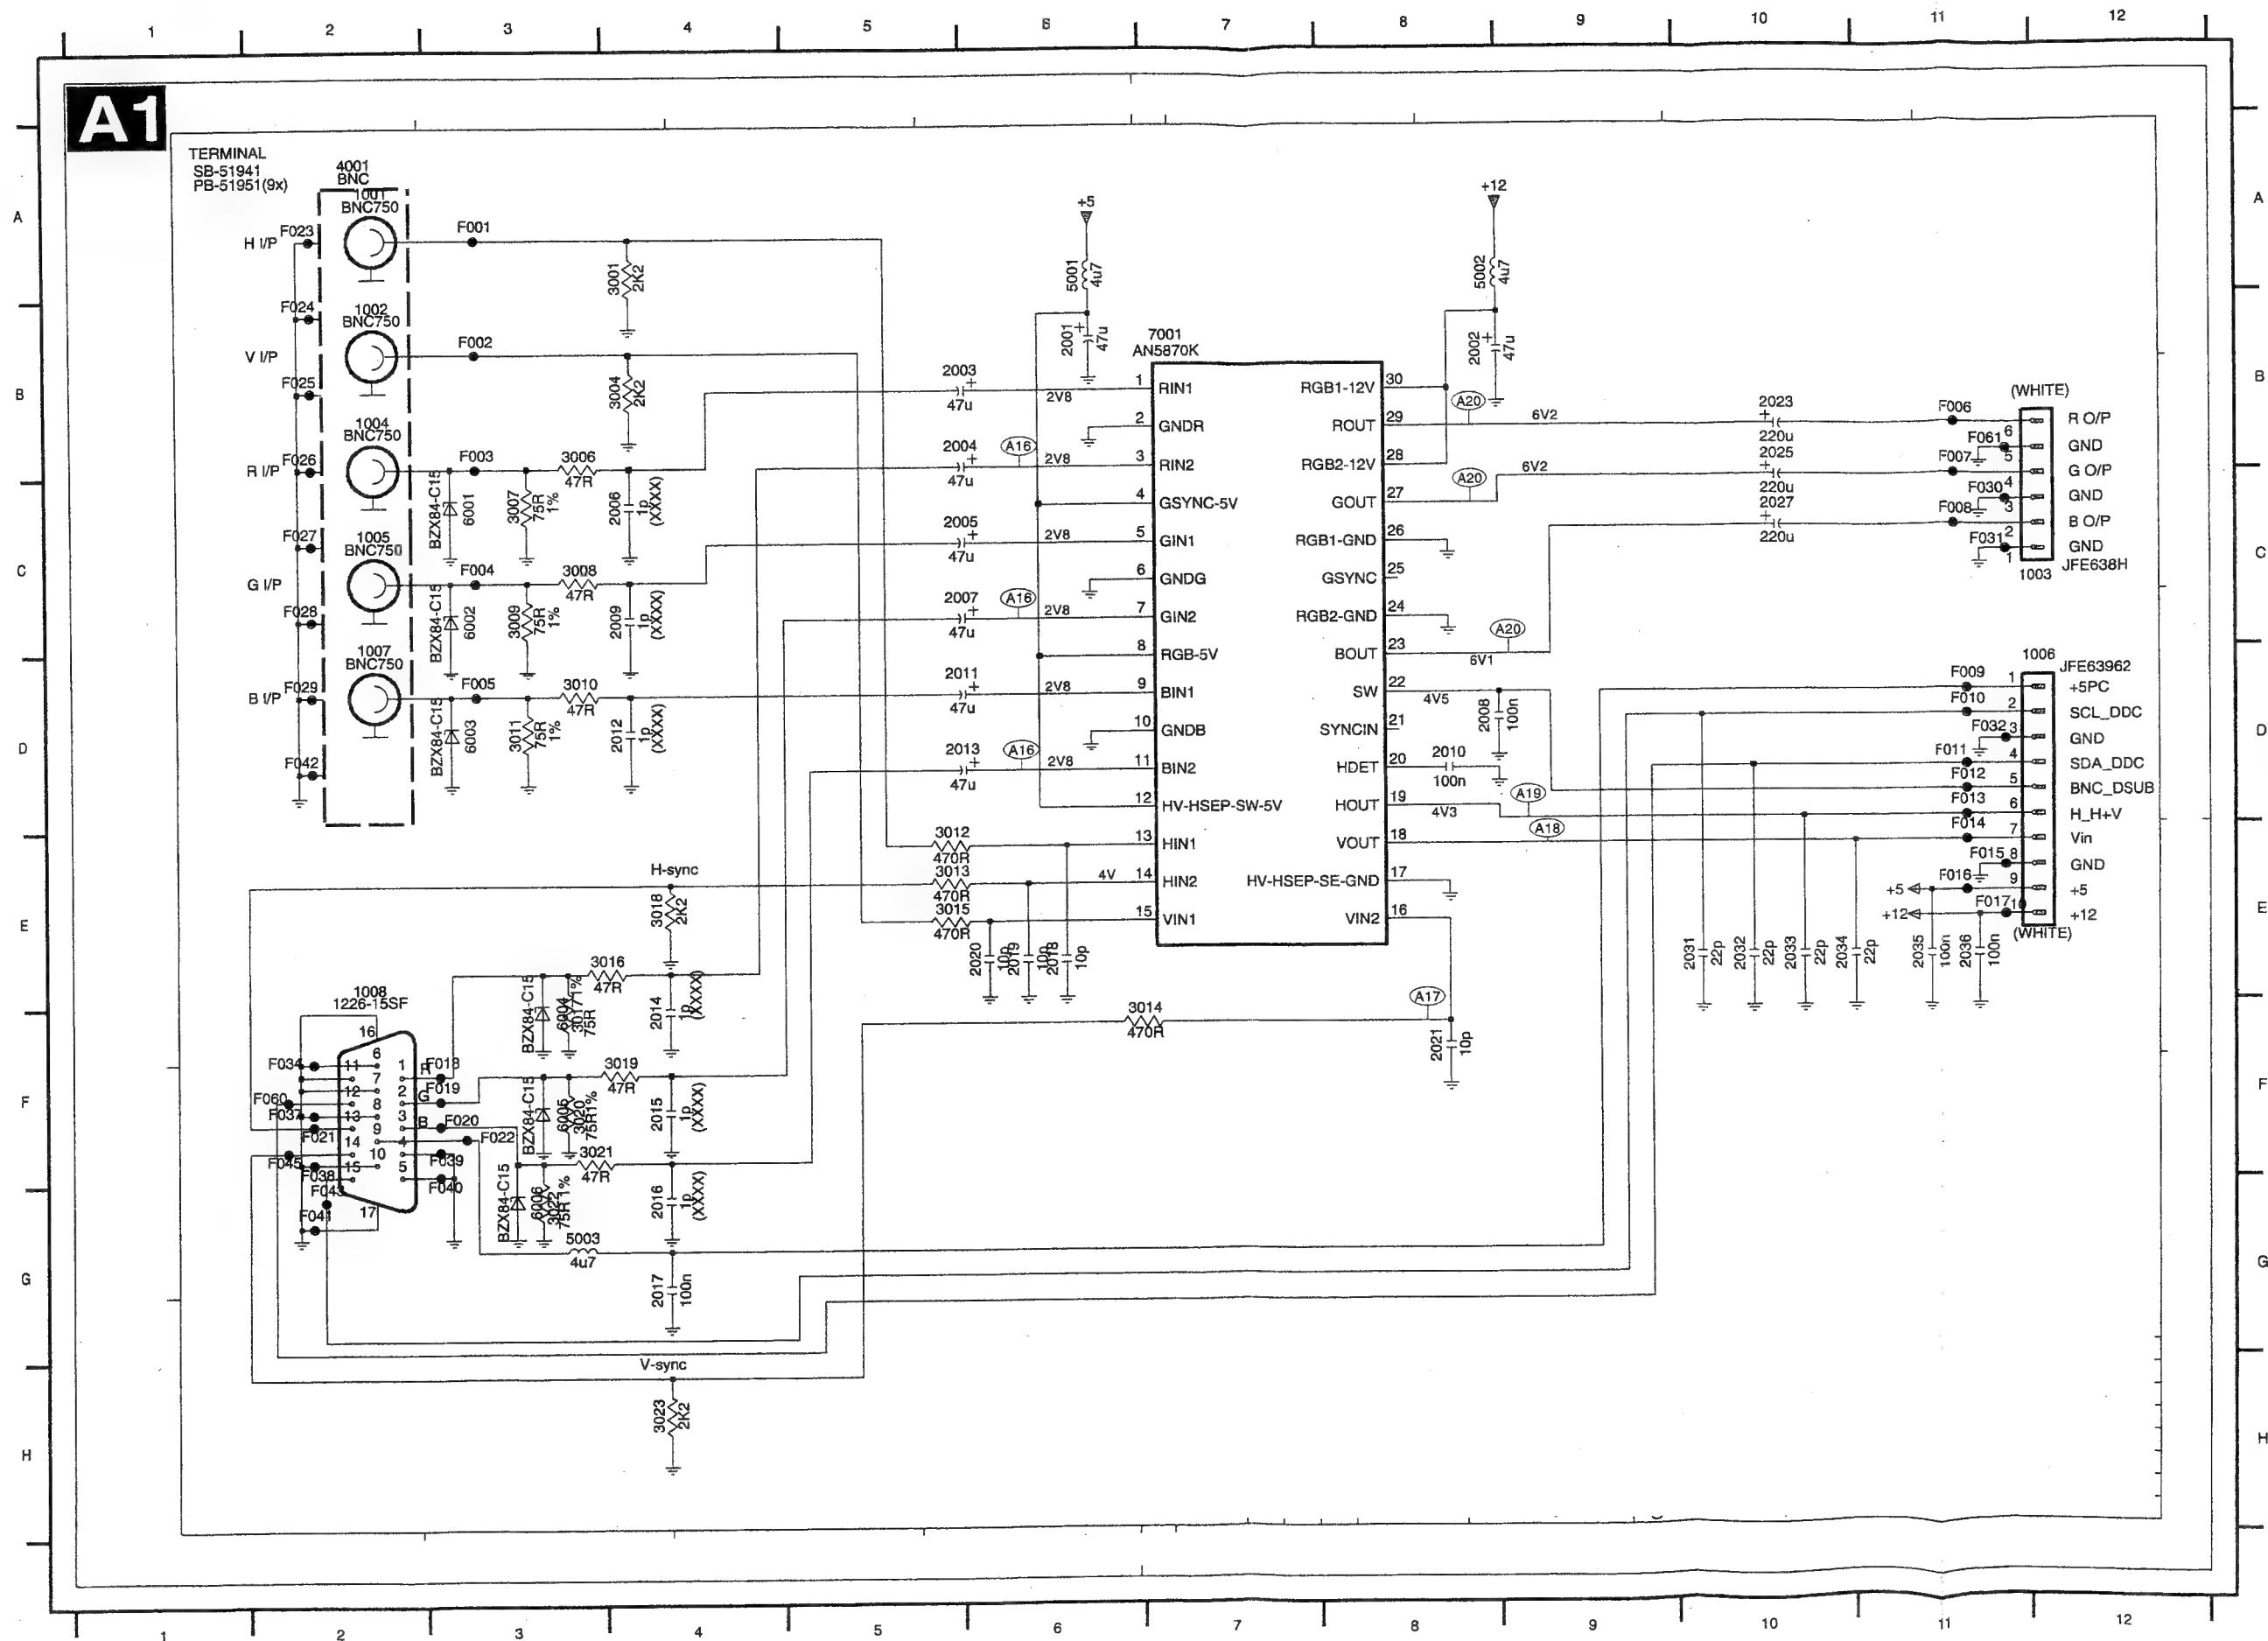

- 1001 A2
- 1002 B2
- 1003 C11
- 1004 B2
- 1005 C2
- 1006 D11
- 1007 C2
- 1008 E2
- 2001 B6
- 2002 B8
- 2003 B5
- 2004 B5
- 2005 C5
- 2006 C4
- 2007 C5
- 2008 D8
- 2009 C4
- 2010 D8
- 2011 D5
- 2012 D4
- 2013 D5
- 2014 F4
- 2015 F4
- 2016 G4
- 2017 G4
- 2018 E6
- 2019 E6
- 2020 E6
- 2021 F8
- 2023 B10
- 2025 B10
- 2027 C10
- 2031 E10
- 2032 E10
- 2033 E10
- 2034 E10
- 2035 E11
- 2036 E11
- 3001 A4
- 3004 B4
- 3006 B3
- 3007 C3
- 3008 C3
- 3009 C3
- 3010 D3
- 3011 D3
- 3012 E5
- 3013 E5
- 3014 F7
- 3015 E5
- 3016 E4
- 3017 F3
- 3018 E4
- 3019 F4
- 3020 F3
- 3021 F3
- 3022 G3
- 3023 H4
- 4001 A2
- 5001 A6
- 5002 A8
- 5003 G3
- 6001 C3
- 6002 C3
- 6003 D3
- 6004 F3
- 6005 F3
- 6006 G3
- 7001 B7
- F001 A3
- F002 B3
- F003 B3
- F004 C3
- F005 D3
- F006 B11
- F007 B11
- F008 C11
- F009 D11
- F010 D11
- F011 D11
- F012 D11
- F013 D11
- F014 E11
- F015 E11
- F016 E11
- F017 E11
- F018 F3
- F019 F3
- F020 F3
- F021 F3
- F022 F3
- F023 A2
- F024 B2
- F025 B2
- F026 B2
- F027 C2
- F028 C2
- F029 D2
- F030 C11
- F031 C11
- F032 D11
- F034 F2
- F037 F2
- F038 F2
- F039 F3
- F040 G3
- F041 G2
- F042 D2
- F043 G2
- F045 F2
- F060 F2
- F061 B11

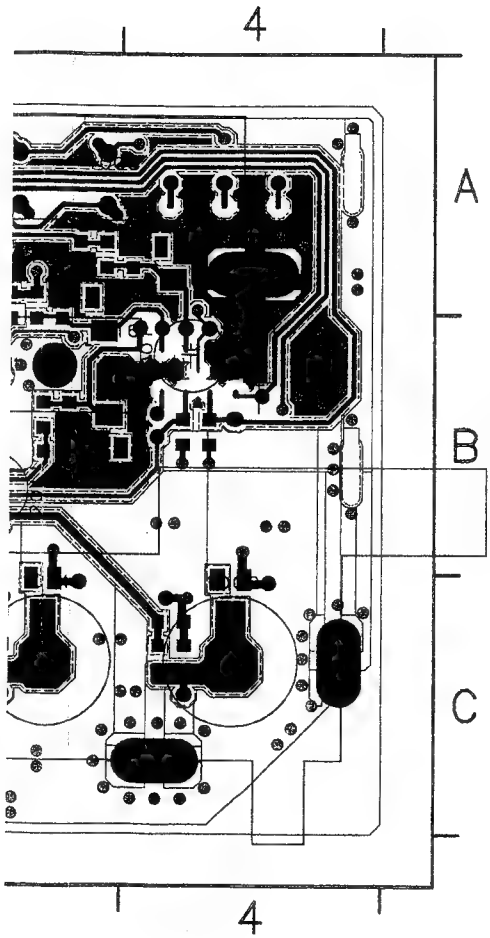


1001	C3	2006	C4
1002	C4	2007	C4
1003	A1	2008	C4
1004	A2	2009	C4
1005	A3	2010	C4
1006	A4	2011	C4
1007	A5	2012	C4
1008	A6	2013	C4
2009	A7	2014	C4
2010	A8	2015	C4
2011	A9	2016	C4
2012	A10	2017	C4
2013	A11	2018	C4
2014	A12	2019	C4
2015	A13	2020	C4
2016	A14	2021	C4
2017	A15	2022	C4
2018	A16	2023	C4
2019	A17	2024	C4
2020	A18	2025	C4
2021	A19	2026	C4
2022	A20	2027	C4
2023	A21	2028	C4
2024	A22	2029	C4
2025	A23	2030	C4
2026	A24	2031	C4
2027	A25	2032	C4
2028	A26	2033	C4
2029	A27	2034	C4
2030	A28	2035	C4
2031	A29	2036	C4
2032	A30	2037	C4
2033	A31	2038	C4
2034	A32	2039	C4
2035	A33	2040	C4
2036	A34	2041	C4
2037	A35	2042	C4
2038	A36	2043	C4
2039	A37	2044	C4
2040	A38	2045	C4
2041	A39	2046	C4
2042	A40	2047	C4
2043	A41	2048	C4
2044	A42	2049	C4
2045	A43	2050	C4
2046	A44	2051	C4
2047	A45	2052	C4
2048	A46	2053	C4
2049	A47	2054	C4
2050	A48	2055	C4
2051	A49	2056	C4
2052	A50	2057	C4
2053	A51	2058	C4
2054	A52	2059	C4
2055	A53	2060	C4
2056	A54	2061	C4
2057	A55	2062	C4
2058	A56	2063	C4
2059	A57	2064	C4
2060	A58	2065	C4
2061	A59	2066	C4
2062	A60	2067	C4
2063	A61	2068	C4
2064	A62	2069	C4
2065	A63	2070	C4
2066	A64	2071	C4
2067	A65	2072	C4
2068	A66	2073	C4
2069	A67	2074	C4
2070	A68	2075	C4
2071	A69	2076	C4
2072	A70	2077	C4
2073	A71	2078	C4
2074	A72	2079	C4
2075	A73	2080	C4
2076	A74	2081	C4
2077	A75	2082	C4
2078	A76	2083	C4
2079	A77	2084	C4
2080	A78	2085	C4
2081	A79	2086	C4
2082	A80	2087	C4
2083	A81	2088	C4
2084	A82	2089	C4
2085	A83	2090	C4
2086	A84	2091	C4
2087	A85	2092	C4
2088	A86	2093	C4
2089	A87	2094	C4
2090	A88	2095	C4
2091	A89	2096	C4
2092	A90	2097	C4
2093	A91	2098	C4
2094	A92	2099	C4
2095	A93	2100	C4
2096	A94	2101	C4
2097	A95	2102	C4
2098	A96	2103	C4
2099	A97	2104	C4
2100	A98	2105	C4
2101	A99	2106	C4
2102	A100	2107	C4
2103	A101	2108	C4
2104	A102	2109	C4
2105	A103	2110	C4
2106	A104	2111	C4
2107	A105	2112	C4
2108	A106	2113	C4
2109	A107	2114	C4
2110	A108	2115	C4
2111	A109	2116	C4
2112	A110	2117	C4
2113	A111	2118	C4
2114	A112	2119	C4
2115	A113	2120	C4
2116	A114	2121	C4
2117	A115	2122	C4
2118	A116	2123	C4
2119	A117	2124	C4
2120	A118	2125	C4
2121	A119	2126	C4
2122	A120	2127	C4
2123	A121	2128	C4
2124	A122	2129	C4
2125	A123	2130	C4
2126	A124	2131	C4
2127	A125	2132	C4
2128	A126	2133	C4
2129	A127	2134	C4
2130	A128	2135	C4
2131	A129	2136	C4
2132	A130	2137	C4
2133	A131	2138	C4
2134	A132	2139	C4
2135	A133	2140	C4
2136	A134	2141	C4
2137	A135	2142	C4
2138	A136	2143	C4
2139	A137	2144	C4
2140	A138	2145	C4
2141	A139	2146	C4
2142	A140	2147	C4
2143	A141	2148	C4
2144	A142	2149	C4
2145	A143	2150	C4
2146	A144	2151	C4
2147	A145	2152	C4
2148	A146	2153	C4
2149	A147	2154	C4
2150	A148	2155	C4
2151	A149	2156	C4
2152	A150	2157	C4
2153	A151	2158	C4
2154	A152	2159	C4
2155	A153	2160	C4
2156	A154	2161	C4
2157	A155	2162	C4
2158	A156	2163	C4
2159	A157	2164	C4
2160	A158	2165	C4
2161	A159	2166	C4
2162	A160	2167	C4
2163	A161	2168	C4
2164	A162	2169	C4
2165	A163	2170	C4
2166	A164	2171	C4
2167	A165	2172	C4
2168	A166	2173	C4
2169	A167	2174	C4
2170	A168	2175	C4
2171	A169	2176	C4
2172	A170	2177	C4
2173	A171	2178	C4
2174	A172	2179	C4
2175	A173	2180	C4
2176	A174	2181	C4
2177	A175	2182	C4
2178	A176	2183	C4
2179	A177	2184	C4
2180	A178	2185	C4
2181	A179	2186	C4
2182	A180	2187	C4
2183	A181	2188	C4
2184	A182	2189	C4
2185	A183	2190	C4
2186	A184	2191	C4
2187	A185	2192	C4
2188	A186	2193	C4
2189	A187	2194	C4
2190	A188	2195	C4
2191	A189	2196	C4
2192	A190	2197	C4
2193	A191	2198	C4
2194	A192	2199	C4
2195	A193	2200	C4
2196	A194	2201	C4
2197	A195	2202	C4
2198	A196	2203	C4
2199	A197	2204	C4
2200	A198	2205	C4
2201	A199	2206	C4
2202	A200	2207	C4
2203	A201	2208	C4
2204	A202	2209	C4
2205	A203	2210	C4
2206	A204	2211	C4
2207	A205	2212	C4
2208	A206	2213	C4
2209	A207	2214	C4
2210	A208	2215	C4
2211	A209	2216	C4
2212	A210	2217	C4
2213	A211	2218	C4
2214	A212	2219	C4
2215	A213	2220	C4
2216	A214	2221	C4
2217	A215	2222	C4
2218	A216	2223	C4
2219	A217	2224	C4
2220	A218	2225	C4
2221	A219	2226	C4
2222	A220	2227	C4
2223	A221	2228	C4
2224	A222	2229	C4
2225	A223	2230	C4
2226	A224	2231	C4
2227	A225	2232	C4
2228	A226	2233	C4
2229	A227	2234	C4
2230	A228	2235	C4
2231	A229	2236	C4
2232	A230	2237	C4
2233	A231	2238	C4
2234	A232	2239	C4
2235	A233	2240	C4
2236	A234	2241	C4
2237	A235	2242	C4
2238	A236	2243	C4
2239	A237	2244	C4
2240	A238	2245	C4
2241	A239	2246	C4
2242	A240	2247	C4
2243	A241	2248	C4
2244	A242	2249	C4
2245	A243	2250	C4
2246	A244	2251	C4
2247	A245	2252	C4
2248	A246	2253	C4
2249	A247	2254	C4
2250	A248	2255	C4
2251	A249	2256	C4
2252	A250	2257	C4
2253	A251	2258	C4
2254	A252	2259	C4
2255	A253	2260	C4
2256	A254	2261	C4
2257	A255	2262	C4
2258	A256	2263	C4
2259	A257	2264	C4
2260	A258	2265	C4
2261	A259	2266	C4
2262	A260	2267	C4
2263	A261	2268	C4
2264	A262	2269	C4
2265	A263	2270	C4
2266	A264	2271	C4
2267	A265	2272	C4
2268	A266	2273	C4
2269	A267	2274	C4
2270	A268	2275	C4
2271	A269	2276	C4
2272	A270	2277	C4
2273	A271	2278	C4
2274	A272	2279	C4
2275	A273	2280	C4
2276	A274	2281	C4
2277	A275	2282	C4
2278	A276	2283	C4
2279	A277	2284	C4
2280	A278	2285	C4
2281	A279	2286	C4
2282	A280	2287	C4
2283	A281	2288	C4
2284	A282	2289	C4
2285	A283	2290	C4
2286	A284	2291	C4
2287	A285	2292	C4
2288	A286	2293	C4
2289	A287	2294	C4
2290	A288	2295	C4
2291	A289	2296	C4
2292	A290	2297	C4
2293	A291	2298	C4
2294	A292	2299	C4
2295	A293	2300	C4
2296	A294	2301	C4
2297	A295	2302	C4
2298	A296	2303	C4
2299	A297	2304	C4
2300	A298	2305	C4
2301	A299	2306	C4
2302	A300	2307	C4
2303	A301	2308	C4
2304	A302	2309	C4
2305	A303	2310	C4
2306	A304	2311	C4
2307	A305	2312	C4
2308	A306	2313	C4
2309	A307	2314	C4
2310	A308	2315	C4
2311	A309	2316	C4
2312	A310	2317	C4
2313	A311	2318	C4
2314	A312	2319	C4
2315	A313	2320	C4
2316	A314	2321	C4
2317	A315	2322	C4
2318	A316	2323	C4
2319	A317	2324	C4
2320	A318	2325	C4
2321	A319	2326	C4
2322	A320	2327	C4
2323	A321	2328	C4
2324	A322	2329	C4
2325	A323	2330	C4
2326	A324	2331	C4
2327	A325	2332	C4
2328	A326	2333	C4
2329	A327	2334	C4
2330	A328	2335	C4
2331	A329	2336	C4
2332	A330	2337	C4
2333	A331	2338	C4
2334	A332	2339	C4
2335	A333	2340	C4
2336	A334	2341	C4
2337	A335	2342	C4
2338	A336	2343	C4
2339	A337	2344	C4
2340	A338	2345	C4
2341	A		

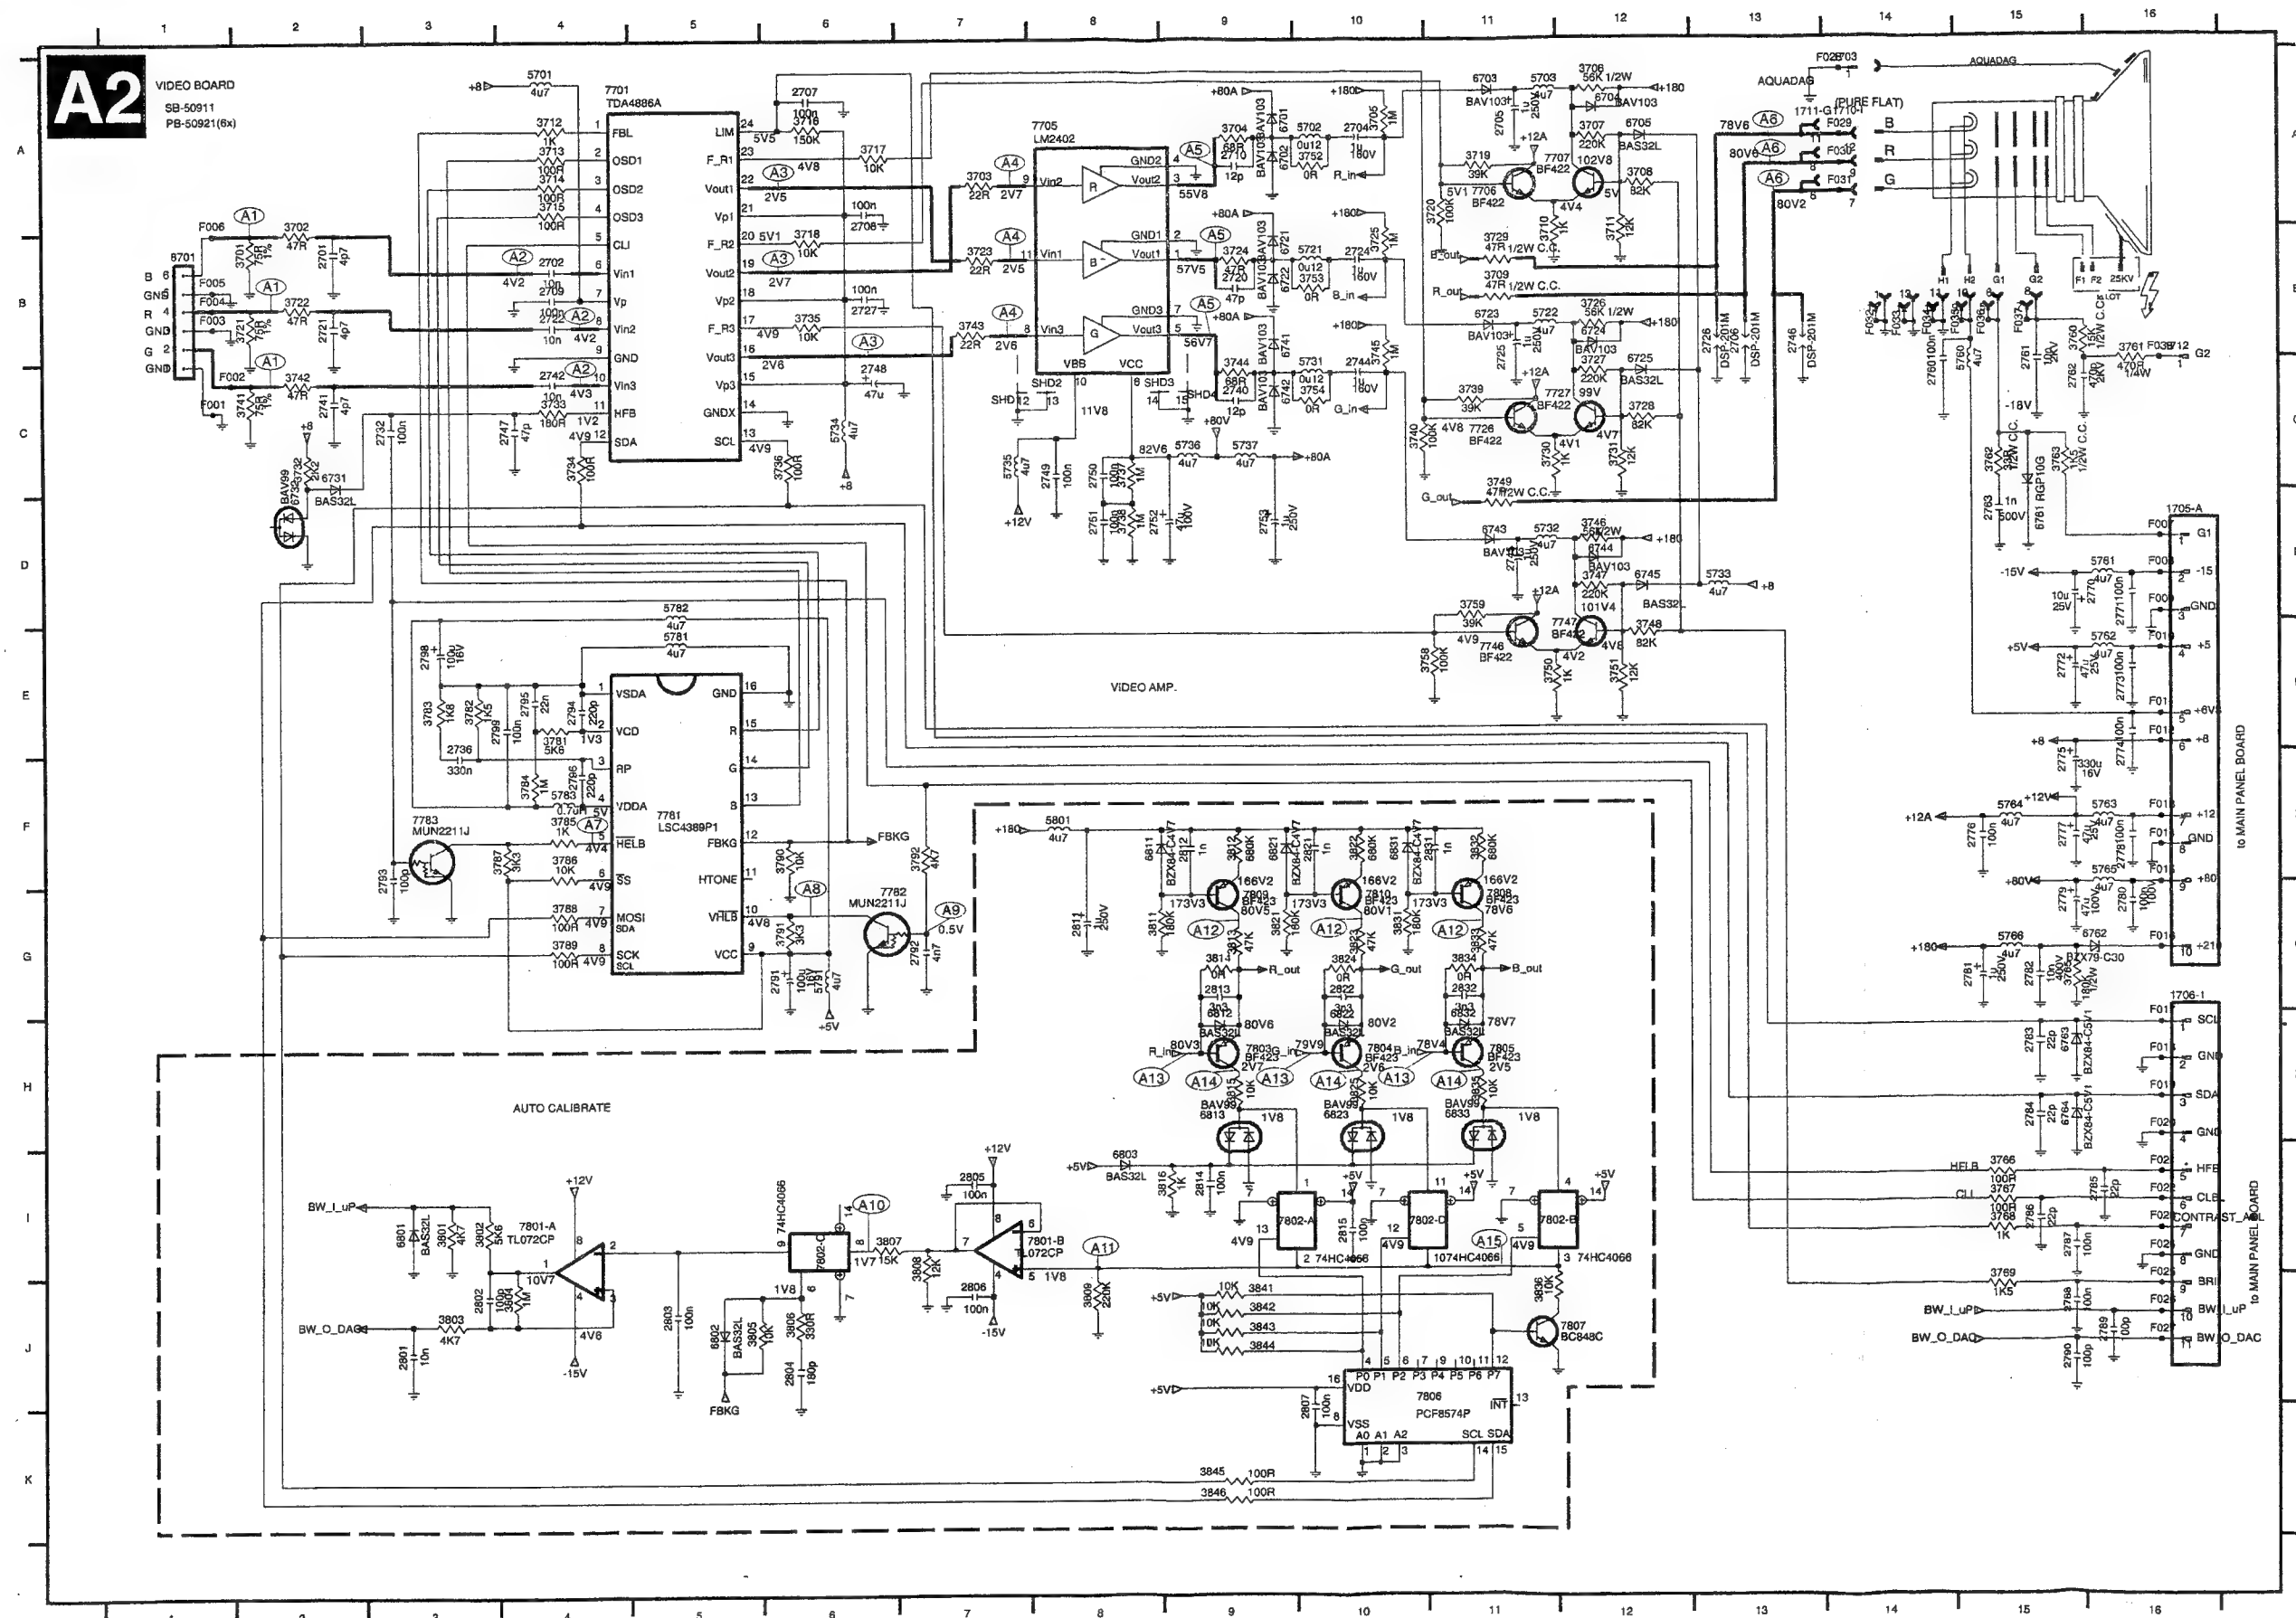


**PCB (A2)**

1703 A14	3759 D11	F006 B1
1705-A D16	3760 B15	F006 A1
1706-I G16	3761 B16	F007 D16
1707-A14	3762 C15	F008 D16
1708-I G13	3763 C15	F009 B16
1710 B12	3765 G15	F010 E16
1712 B21	3767 H15	F011 E16
1713 B24	3768 H15	F012 E16
2705 A11	3769 J15	F013 F16
2708 A13	3771 E12	F014 F16
2707 B08	3781 E12	F015 F16
2708 A06	3783 E15	F016 F16
2709 B84	3784 F14	F018 H16
2710 A9	3785 F14	F019 H16
2711 B9	3786 F14	F020 H16
2722 B81	3787 F14	F021 I16
2722 B81	3788 G14	F022 I16
2724 B10	3789 G14	F023 I16
2727 B11	3790 F16	F024 I16
2728 B13	3791 G16	F025 I16
2727 B6	3792 F13	F026 I16
2732 C3	3801 F17	F027 J16
2738 B9	3802 J13	F028 A16
2740 C9	3803 J14	F029 A16
2741 C2	3804 J13	F030 A16
2742 C4	3805 J15	F031 A16
2744 C10	3806 J16	F032 B16
2745 D11	3807 J16	F033 B16
2746 B13	3808 J17	F034 B16
2747 A14	3809 J17	F035 B16
2748 C6	3811 G19	F036 B16
2749 C8	3812 F9	F037 B15
2750 C8	3813 G9	F038 B16
2751 D8	3814 G9	
2752 D8	3815 H8	
2753 D9	3816 I9	
2780 C14	3821 G19	
2781 C15	3822 F10	
2782 C15	3823 G10	
2783 C15	3824 G10	
2784 C16	3825 H10	
2785 C16	3826 I16	
2772 E15	3832 F11	
2773 E16	3833 G11	
2774 E16	3834 G11	
2775 F15	3835 H11	
2776 F15	3836 J11	
2777 F15	3841 J9	
2778 G16	3842 J9	
2779 G15	3843 J9	
2780 G16	3844 J9	
2781 G15	3845 K9	
2782 G15	3846 K9	
2783 H15	5701 A4	
2784 H15	5702 A10	
2785 H16	5703 A11	
2786 H16	5721 F10	
2787 H15	5722 B11	
2788 J15	5731 C10	
2789 J15	5732 D13	
2790 J15	5733 D13	
2791 G6	5734 C6	
2792 G7	5735 C7	
2793 G8	5736 C8	
2794 E4	5737 C9	
2795 E4	5760 C15	
2796 F4	5781 D16	
2797 F4	5782 D16	
2798 F4	5783 F16	
2800 J3	5784 F15	
2801 J3	5785 F16	
2802 J3	5786 F16	
2803 J7	5787 A5	
2804 J7	5788 J5	
2805 J7	5781 E5	
2806 J7	5782 E5	
2807 K10	5791 G6	
2811 G8	5801 F8	
2812 G9	6701 A9	
2813 G9	6702 A9	
2814 III	6703 A11	
2815 I10	6704 A12	
2816 F10	6705 A12	
2817 F10	6721 B9	
2818 F10	6722 B9	
2831 F10	6723 B11	
2832 G11	6724 B12	
2833 G11	6725 C12	
3702 A7	6731 C2	
3703 A7	6732 D2	
3704 A9	6733 D9	
3705 A10	6734 B9	
3706 A12	6742 C3	
3707 A12	6743 D11	
3708 A12	6744 D12	
3709 B11	6745 D12	
3710 B11	6761 D15	
3711 B12	6762 G16	
3712 A4	6763 H15	
3713 A4	6764 G15	
3714 A4	6801 J3	
3715 A4	6802 J5	
3716 A6	6803 A5	
3717 A6	6811 F8	
3718 B6	6812 H9	
3719 A11	6813 H9	
3720 A11	6821 F9	
3721 B2	6822 H10	
3722 B2	6823 H10	
3723 B7	6831 F10	
3724 B9	6832 J11	
3725 B10	6833 H11	
3726 B12	7701 A4	
3727 C12	7705 A8	
3728 C12	7706 J11	
3729 B11	7707 A12	
3730 B11	7726 C11	
3731 B11	7727 C11	
3732 C12	7746 E11	
3733 C4	7747 B11	
3734 C4	7781 F5	
3735 C4	7782 G7	
3736 C6	7783 F3	
3737 C8	7801-A1	
3738 D8	7801-B18	
3739 D8	7801-C10	
3740 C10	7802-B11	
3741 C2	7802-C16	
3742 C6	7802-D16	
3743 B7	7803 H8	
3744 C9	7804 H10	
3745 B10	7805 H11	
3746 C12	7806 J9	
3747 D12	7807 J11	
3748 C12	7808 G11	
3749 C11	7809 G9	
3750 C11	7810 G10	
3751 E12	6701 B1	
3752 A10	6001 C1	
3753 B10	6002 C1	
3754 B10	6003 C1	
3758 E11	6004 B1	

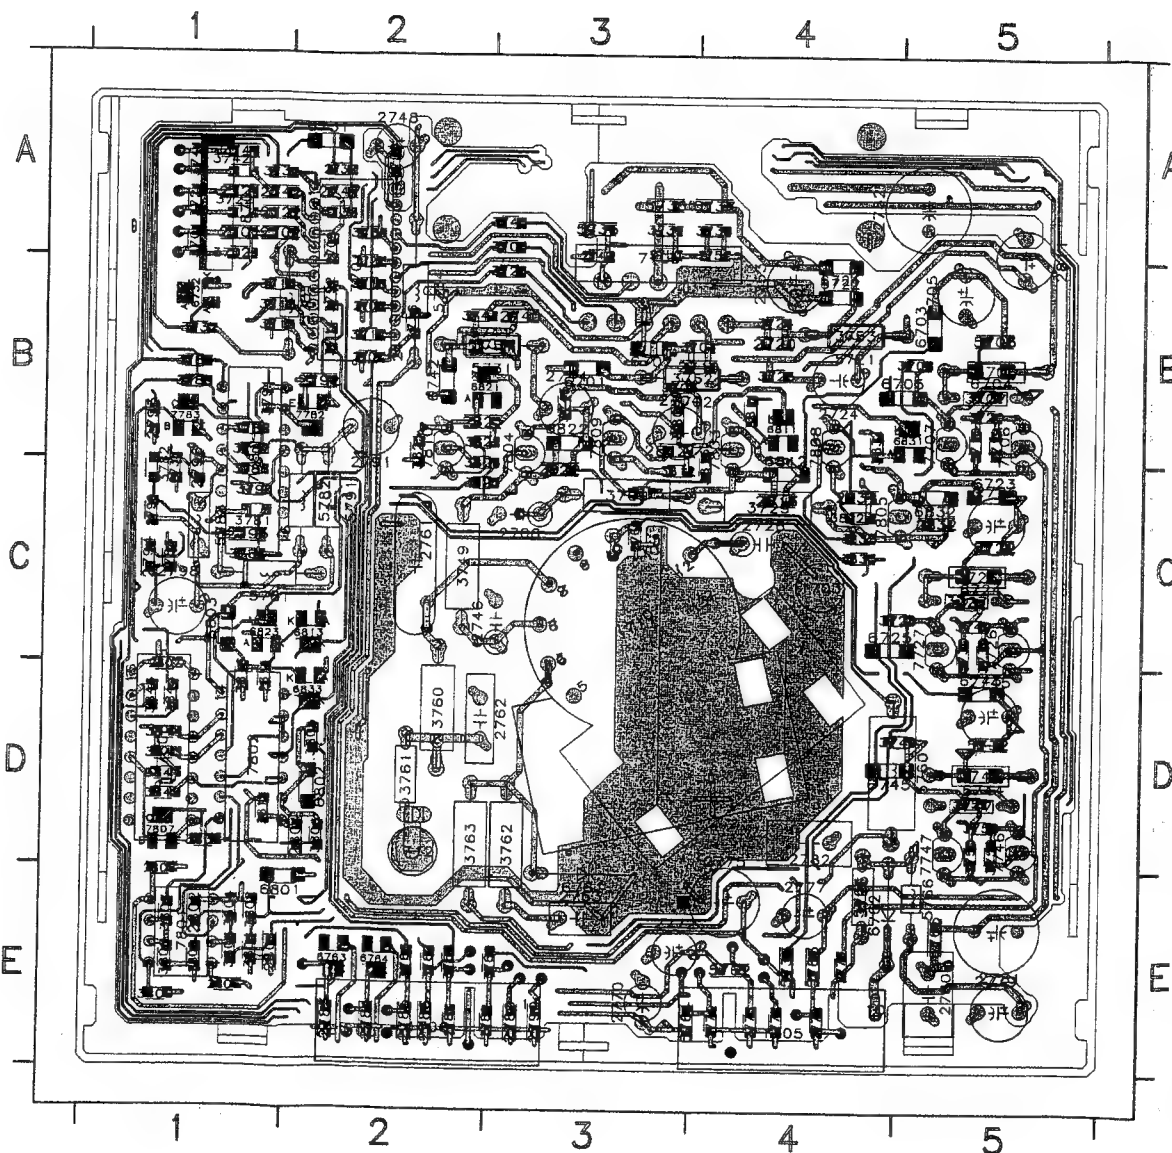

78003 78004 78005 78006 78007 78008 78009 78010 78011 78012 78013 78014 78015 78016 78017 78018 78019 78020 78021 78022 78023 78024 78025 78026 78027 78028 78029 78030 78031 78032 78033 78034 78035 78036 78037 78038 78039 78040 78041 78042 78043 78044 78045 78046 78047 78048 78049 78050 78051 78052 78053 78054 78055 78056 78057 78058 78059 78060 78061 78062 78063 78064 78065 78066 78067 78068 78069 78070 78071 78072 78073 78074 78075 78076 78077 78078 78079 78080 78081 78082 78083 78084 78085 78086 78087 78088 78089 78090 78091 78092 78093 78094 78095 78096 78097 78098 78099 78100 78101 78102 78103 78104 78105 78106 78107 78108 78109 78110 78111 78112 78113 78114 78115 78116 78117 78118 78119 78120 78121 78122 78123 78124 78125 78126 78127 78128 78129 78130 78131 78132 78133 78134 78135 78136 78137 78138 78139 78140 78141 78142 78143 78144 78145 78146 78147 78148 78149 78150 78151 78152 78153 78154 78155 78156 78157 78158 78159 78160 78161 78162 78163 78164 78165 78166 78167 78168 78169 78170 78171 78172 78173 78174 78175 78176 78177 78178 78179 78180 78181 78182 78183 78184 78185 78186 78187 78188 78189 78190 78191 78192 78193 78194 78195 78196 78197 78198 78199 78200 78201 78202 78203 78204 78205 78206 78207 78208 78209 78210 78211 78212 78213 78214 78215 78216 78217 78218 78219 78220 78221 78222 78223 78224 78225 78226 78227 78228 78229 78230 78231 78232 78233 78234 78235 78236 78237 78238 78239 78240 78241 78242 78243 78244 78245 78246 78247 78248 78249 78250 78251 78252 78253 78254 78255 78256 78257 78258 78259 78260 78261 78262 78263 78264 78265 78266 78267 78268 78269 78270 78271 78272 78273 78274 78275 78276 78277 78278 78279 78280 78281 78282 78283 78284 78285 78286 78287 78288 78289 78290 78291 78292 78293 78294 78295 78296 78297 78298 78299 78300 78301 78302 78303 78304 78305 78306 78307 78308 78309 78310 78311 78312 78313 78314 78315 78316 78317 78318 78319 78320 78321 78322 78323 78324 78325 78326 78327 78328 78329 78330 78331 78332 78333 78334 78335 78336 78337 78338 78339 78340 78341 78342 78343 78344 78345 78346 78347 78348 78349 78350 78351 78352 78353 78354 78355 78356 78357 78358 78359 78360 78361 78362 78363 78364 78365 78366 78367 78368 78369 78370 78371 78372 78373 78374 78375 78376 78377 78378 78379 78380 78381 78382 78383 78384 78385 78386 78387 78388 78389 78390 78391 78392 78393 78394 78395 78396 78397 78398 78399 78400 78401 78402 78403 78404 78405 78406 78407 78408 78409 78410 78411 78412 78413 78414 78415 78416 78417 78418 78419 78420 78421 78422 78423 78424 78425 78426 78427 78428 78429 78430 78431 78432 78433 78434 78435 78436 78437 78438 78439 78440 78441 78442 78443 78444 78445 78446 78447 78448 78449 78450 78451 78452 78453 78454 78455 78456 78457 78458 78459 78460 78461 78462 78463 78464 78465 78466 78467 78468 78469 78470 78471 78472 78473 78474 78475 78476 78477 78478 78479 78480 78481 78482 78483 78484 78485 78486 78487 78488 78489 78490 78491 78492 78493 78494 78495 78496 78497 78498 78499 78500 78501 78502 78503 78504 78505 78506 78507 78508 78509 78510 78511 78512 78513 78514 78515 78516 78517 78518 78519 78520 78521 78522 78523 78524 78525 78526 78527 78528 78529 78530 78531 78532 78533 78534 78535 78536 78537 78538 78539 78540 78541 78542 78543 78544 78545 78546 78547 78548 78549 78550 78551 78552 78553 78554 78555 78556 78557 78558 78559 78560 78561 78562 78563 78564 78565 78566 78567 78568 78569 78570 78571 78572 78573 78574 78575 78576 78577 78578 78579 78580 78581 78582 78583 78584 78585 78586 78587 78588 78589 78590 78591 78592 78593 78594 78595 78596 78597 78598 78599 78600 78601 78602 78603 78604 78605 78606 78607 78608 78609 78610 78611 78612 78613 78614 78615 78616 78617 78618 78619 78620 78621 78622 78623 78624 78625 78626 78627 78628 78629 78630 78631 78632 78633 78634 78635 78636 78637 78638 78639 78640 78641 78642 78643 78644 78645 78646 78647 78648 78649 78650 78651 78652 78653 78654 78655 78656 78657 78658 78659 78660 78661 78662 78663 78664 78665 78666 78667 78668 78669 78670 78671 78672 78673 78674 78675 78676 78677 78678 78679 78680 78681 78682 78683 78684 78




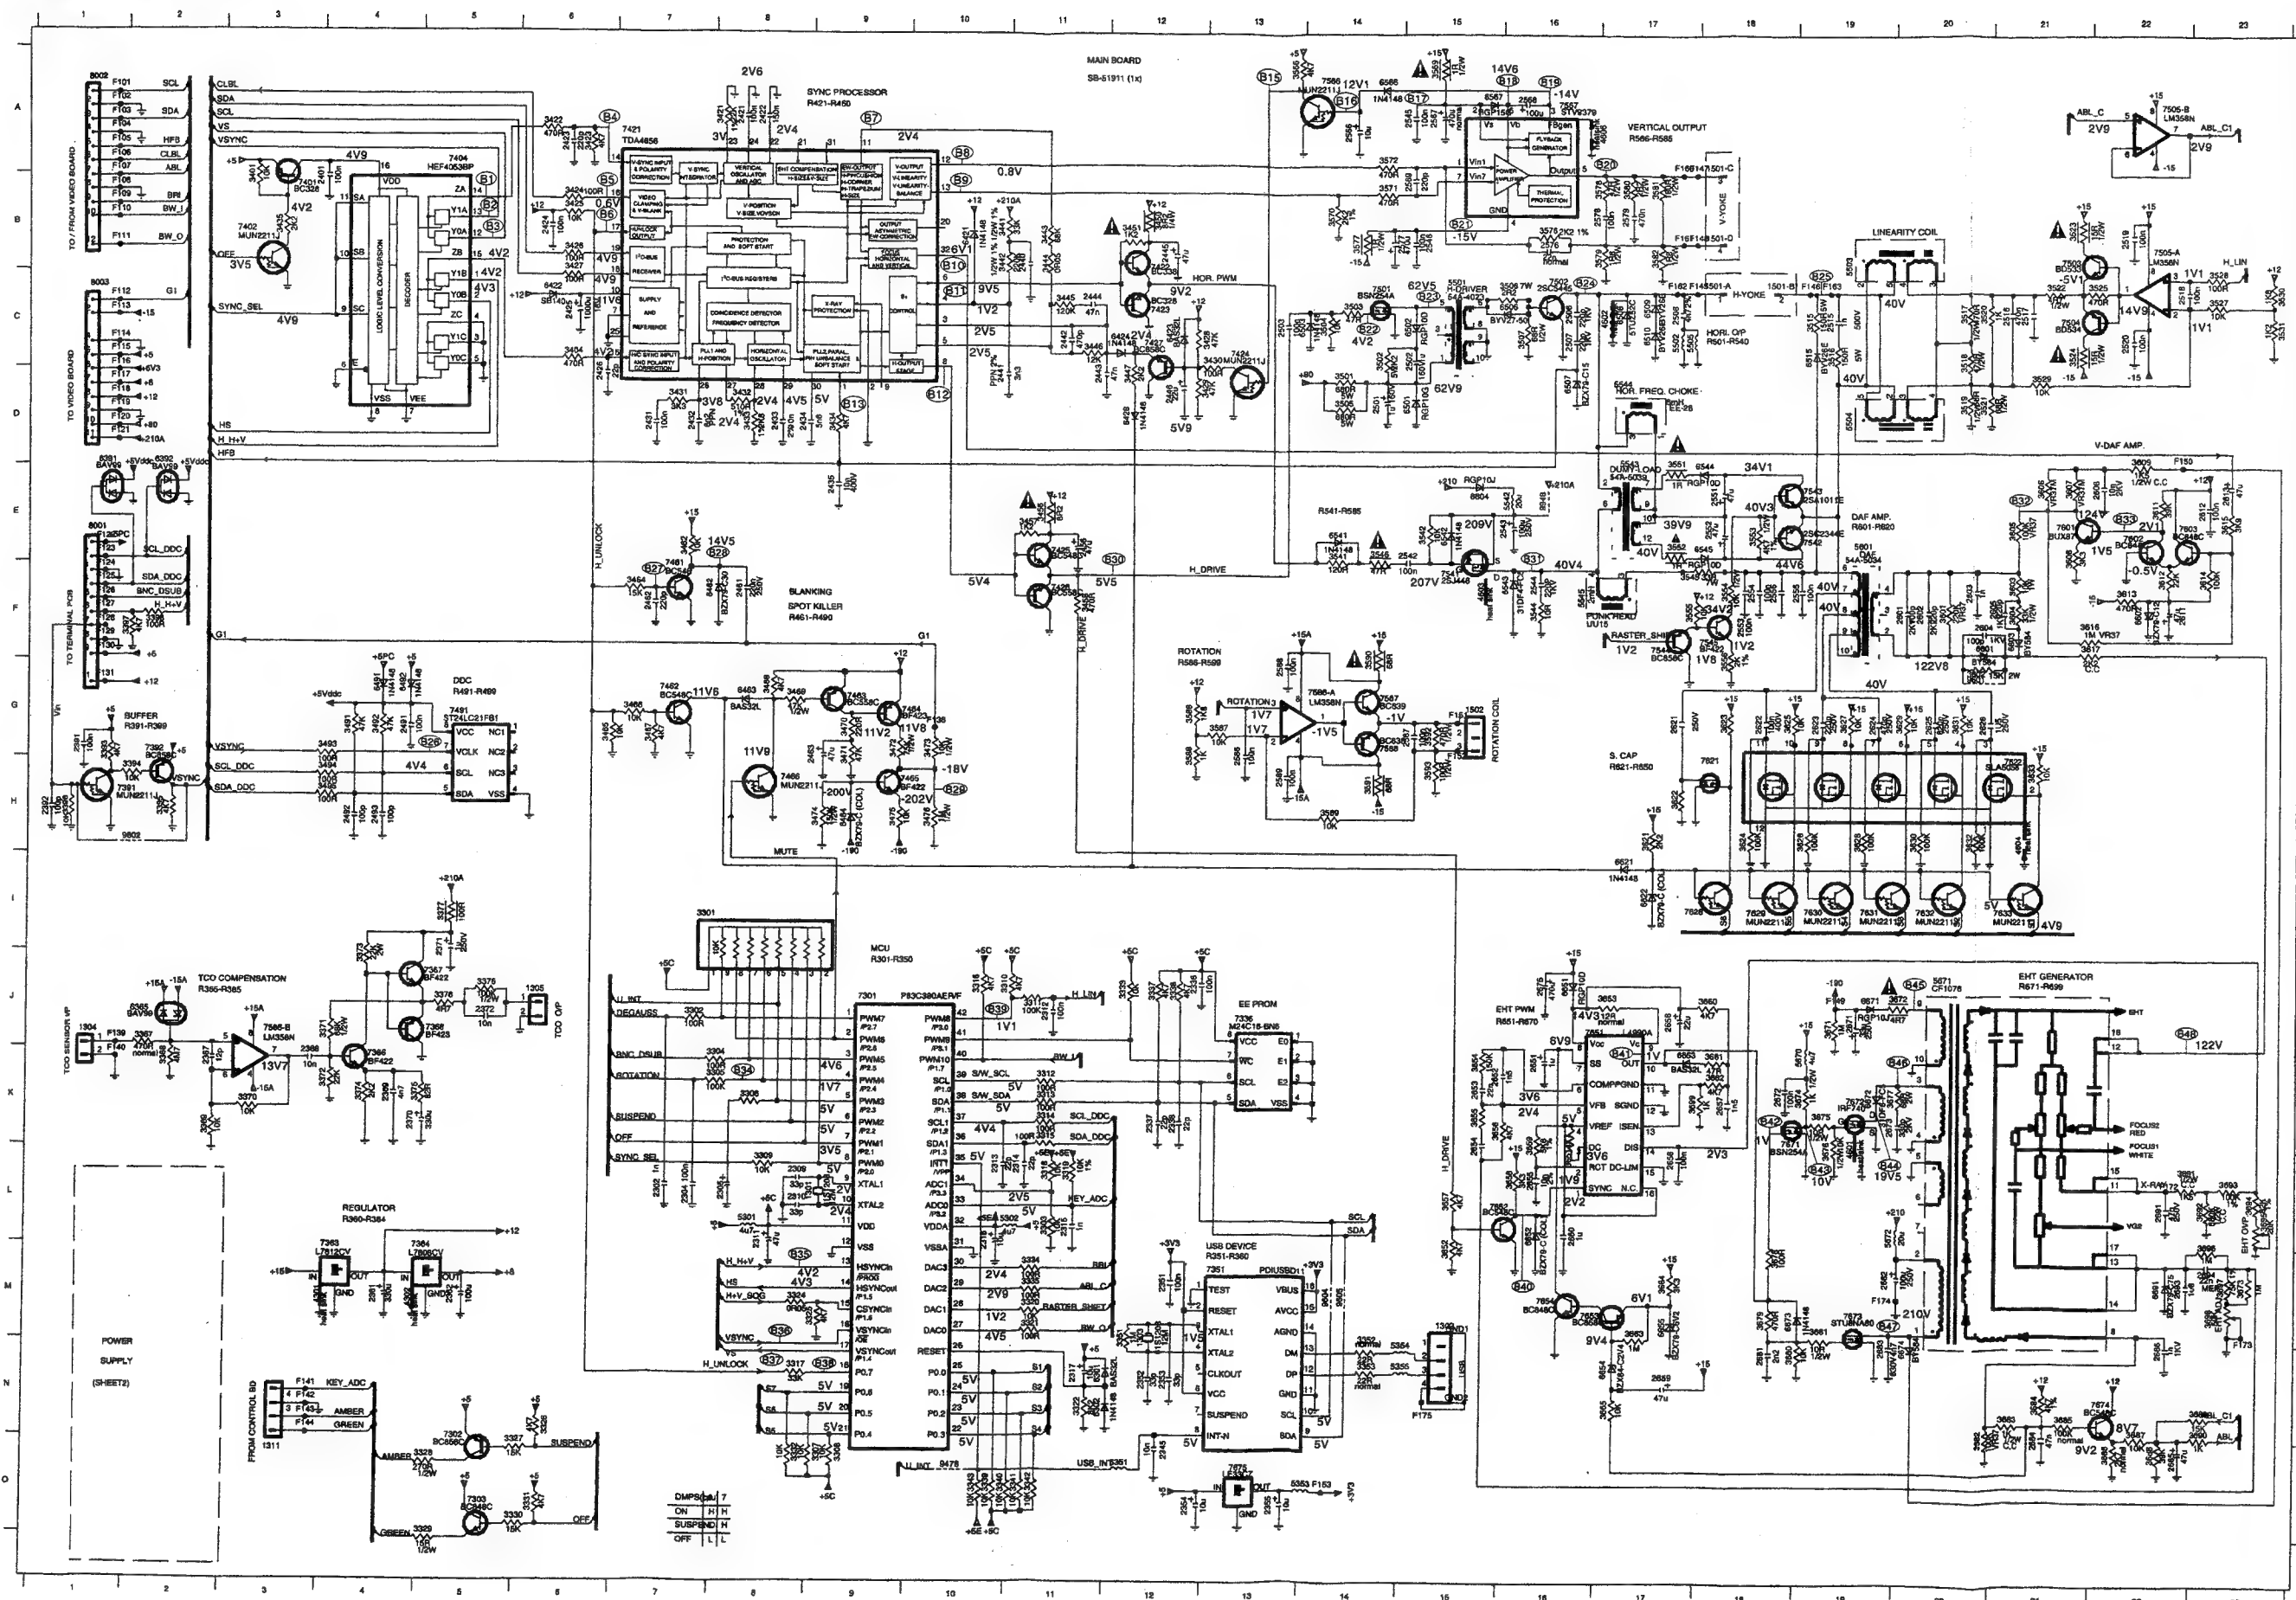


12001 L91	3270 K3	3698 M23	F145 C7
3202 M15	3272 K4	3698 K17	F146 C18
3203 M16	3273 K5	3700 M18	F147 A17
1204 J1	3274 K6	3701 M19	F148 B17
3205 J6	3275 K7	3701 K19	F149 D22
3206 J7	3276 K8	3702 M20	F150 D22
1501-A-18 3278 J8	3703 M1	4603 F15	F151 G15
1501-B-18 3279 J9	3704 M2	4604 F16	F152 G15
1501-C-18 3279 J8	4606 A17	4606 A17	F153 G15
1502 J10	3279 K9	3705 M21	F154 A17
1502 G15	3280 M26	3706 J11	F155 B17
1503 J11	3280 J6	3811 O12	F156 C17
1504 J12	3281 M27	3812 M18	F157 C18
3205 L8	3281 F1	3386 M15	F172 L22
3206 L9	3282 M28	3387 M16	F173 M23
2310 L8	3281 G1	3503 O15	F174 M18
2311 L9	3282 M29	3504 O16	F175 M18
2312 J11	3281 J6	5503 J19	
2313 L11	3282 A8	5504 J19	
2314 L11	3283 A9	5505 J19	
2316 L11	3284 B6	5506 J19	
2317 L11	3285 B7	5507 J19	
2317 N11	3286 B8	5508 J19	
2318 L11	3287 B9	5509 J19	
2319 L11	3288 B10	5510 J19	
2323 K12	3289 C12	5601 J19	
2324 K13	3290 C13	5602 J19	
2345 O12	3290 C13	5817 J20	
2346 O13	3291 D7	5872 J19	
2347 O14	3292 D8	5873 J19	
2352 M12	3293 D9	6302 M11	
2353 M13	3294 D10	6303 M11	
2354 M14	3295 D11	6304 M11	
2355 O13	3296 D12	6305 M11	
2356 O14	3297 D13	6306 M11	
2362 M52	3298 D14	6417 B10	
2363 M53	3299 D15	6418 B10	
2364 M54	3300 D16	6419 B10	
2365 M55	3301 D17	6420 C12	
2366 M56	3302 D18	6421 C12	
2367 M57	3303 D19	6422 C12	
2368 K4	3444 B11	6423 C12	
2369 K5	3445 B12	6424 C12	
2370 K6	3446 B13	6425 C12	
2371 G1	3447 B14	6426 F7	
2372 G2	3448 B15	6427 F7	
2373 G3	3449 B16	6428 F7	
2374 G4	3450 B17	6429 F7	
2401 B3	3451 B18	6430 G4	
2402 B4	3452 B19	6431 G4	
2403 B5	3453 B20	6432 G4	
2404 B6	3454 B21	6433 G4	
2405 B7	3455 B22	6434 G4	
2406 B8	3456 B23	6435 G4	
2407 B9	3457 B24	6436 G4	
2408 B10	3458 B25	6437 G4	
2409 B11	3459 B26	6438 G4	
2410 B12	3460 B27	6439 G4	
2411 B13	3461 B28	6440 G4	
2412 B14	3462 B29	6441 G4	
2413 D7	3463 A8	6506 C17	
2414 D8	3464 A9	6507 C17	
2415 D9	3465 A10	6508 C17	
2416 D10	3466 A11	6509 C17	
2417 D11	3467 A12	6510 C17	
2418 D12	3468 A13	6511 C17	
2419 D13	3469 A14	6512 C17	
2420 D14	3470 A15	6513 C17	
2421 D15	3471 A16	6514 C17	
2422 A8	3482 E7	6515 D15	
2423 A9	3483 E8	6516 D15	
2424 A10	3484 F7	6517 D15	
2425 A11	3485 F8	6518 D15	
2426 A12	3486 F9	6519 D15	
2427 A13	3487 F10	6520 D15	
2428 A14	3488 F11	6521 D15	
2429 A15	3489 F12	6522 D15	
2430 A16	3490 F13	6523 D15	
2431 D7	3490 G8	6506 C17	
2432 D8	3491 G9	6507 C17	
2433 D9	3492 G10	6508 C17	
2434 D10	3493 G11	6509 C17	
2435 D11	3494 G12	6510 C17	
2436 D12	3495 G13	6511 C17	
2437 D13	3496 G14	6512 C17	
2438 D14	3497 G15	6513 C17	
2439 D15	3498 G16	6514 C17	
2440 D16	3499 G17	6515 C17	
2441 D17	3500 G18	6516 C17	
2442 C11	3498 H4	6518 H18	
2443 C12	3499 H5	6519 H18	
2444 C13	3500 H6	6520 H18	
2445 C14	3501 H7	6521 H18	
2446 C15	3502 H8	6522 H18	
2447 C16	3503 H9	6523 H18	
2448 C17	3504 H10	6524 H18	
2449 C18	3505 H11	6525 H18	
2450 C19	3506 H12	6526 H18	
2451 C20	3507 H13	6527 H18	
2452 C21	3508 H14	6528 H18	
2453 C22	3509 H15	6529 H18	
2454 C23	3510 H16	6530 H18	
2455 C24	3511 H17	6531 H18	
2456 C25	3512 H18	6532 H18	
2457 C26	3513 H19	6533 H18	
2458 C27	3514 H20	6534 H18	
2459 C28	3515 H21	6535 H18	
2460 C29	3516 H22	6536 H18	
2461 C30	3517 H23	6537 H18	
2462 C31	3518 H24	6538 H18	
2463 C32	3519 H25	6539 H18	
2464 C33	3520 H26	6540 H18	
2465 C34	3521 H27	6541 H18	
2466 C35	3522 H28	6542 H18	
2467 C36	3523 H29	6543 H18	
2468 C37	3524 H30	6544 H18	
2469 C38	3525 H31	6545 H18	
2470 C39	3526 H32	6546 H18	
2471 C40	3527 H33	6547 H18	
2472 C41	3528 H34	6548 H18	
2473 C42	3529 H35	6549 H18	
2474 C43	3530 H36	6550 H18	
2475 C44	3531 H37	6551 H18	
2476 C45	3532 H38	6552 H18	
2477 C46	3533 H39	6553 H18	
2478 C47	3534 H40	6554 H18	
2479 C48	3535 H41	6555 H18	
2480 C49	3536 H42	6556 H18	
2481 C50	3537 H43	6557 H18	
2482 C51	3538 H44	6558 H18	
2483 C52	3539 H45	6559 H18	
2484 C53	3540 H46	6560 H18	
2485 C54	3541 H47	6561 H18	
2486 C55	3542 H48	6562 H18	
2487 C56	3543 H49	6563 H18	
2488 C57	3544 H50	6564 H18	
2489 C58	3545 H51	6565 H18	
2490 C59	3546 H52	6566 H18	
2491 C60	3547 H53	6567 H18	
2492 C61	3548 H54	6568 H18	
2493 C62	3549 H55	6569 H18	
2494 C63	3550 H56	6570 H18	
2495 C64	3551 H57	6571 H18	
2496 C65	3552 H58	6572 H18	
2497 C66	3553 H59	6573 H18	
2498 C67	3554 H60	6574 H18	
2499 C68	3555 H61	6575 H18	
2500 C69	3556 H62	6576 H18	
2501 C70	3557 H63	6577 H18	
2502 C71	3558 H64	6578 H18	
2503 C72	3559 H65	6579 H18	
2504 C73	3560 H66	6580 H18	
2505 C74	3561 H67	6581 H18	
2506 C75	3562 H68	6582 H18	
2507 C76	3563 H69	6583 H18	
2508 C77	3564 H70	6584 H18	
2509 C78	3565 H71	6585 H18	
2510 C79	3566 H72	6586 H18	
2511 C80	3567 H73	6587 H18	
2512 C81	3568 H74	6588 H18	
2513 C82	3569 H75	6589 H18	
2514 C83	3570 H76	6590 H18	
2515 C84	3571 H77	6591 H18	
2516 C85	3572 H78	6592 H18	
2517 C86	3573 H79	6593 H18	
2518 C87	3574 H80	6594 H18	
2519 C88	3575 H81	6595 H18	
2520 C89	3576 H82	6596 H18	
2521 C90	3577 H83	6597 H18	
2522 C91	3578 H84	6598 H18	
2523 C92	3579 H85	6599 H18	
2524 C93	3580 H86	6600 H18	
2525 C94	3581 H87	6601 H18	
2526 C95	3582 H88	6602 H18	
2527 C96	3583 H89	6603 H18	
2528 C97	3584 H90	6604 H18	
2529 C98	3585 H91	6605 H18	
2530 C99	3586 H92	6606 H18	
2531 C100	3587 H93	6607 H18	
2532 C101	3588 H94	6608 H18	
2533 C102	3589 H95	6609 H18	
2534 C103	3590 H96	6610 H18	
2535 C104	3591 H97	6611 H18	
2536 C105	3592 H98	6612 H18	
2537 C106	3593 H99	6613 H18	
2538 C107	3594 H100	6614 H18	
2539 C108	3595 H101	6615 H18	
2540 C109	3596 H102	6616 H18	
2541 C110	3597 H103	6617 H18	
2542 C111	3598 H104	6618 H18	
2543 C112	3599 H105	6619 H18	
2544 C113	3600 H106	6620 H18	
2545 C114	3601 H107	6621 H18	
2546 C115	3602 H108	6622 H18	
2547 C116	3603 H109	6623 H18	
2548 C117	3604 H110	6624 H18	
2549 C118	3605 H111	6625 H18	
2550 C119	3606 H112	6626 H18	
2551 C120	3607 H113	6627 H18	
2552 C121	3608 H114	6628 H18	
2553 C122	3609 H115	6629 H18	
2554 C123	3610 H116	6630 H18	
2555 C124	3611 H117	6631 H18	
2556 C125	3612 H118	6632 H18	
2557 C126	3613 H119	6633 H18	
2558 C127	3614 H120	6634 H18	
2559 C128	3615 H121	6635 H18	
2560 C129	3616 H122	6636 H18	
2561 C130	3617 H123	6637 H18	
2562 C131	3618 H124	6638 H18	
2563 C132	3619 H125	6639 H18	
2564 C133	3620 H126	6640 H18	
2565 C134	3621 H127	6641 H18	
2566 C135	3622 H128	6642 H18	
2567 C136	3623 H129	6643 H18	
2568 C137	3624 H130	6644 H18	
2569 C138	3625 H131	6645 H18	
2570 C139	3626 H132	6646 H18	
2571 C140	3627 H133	6647 H18	
2572 C141	3628 H134	6648 H18	
2573 C142	3629 H135	6649 H18	
2574 C143	3630 H136	6650 H18	
2575 C144	3631 H137	6651 H18	
2576 C145	3632 H138	6652 H18	
2577 C146	3633 H139	6653 H18	
2578 C147	3634 H140	6654 H18	
2579 C148	3635 H141	6655 H18	
2580 C149	3636 H142	6656 H18	
2581 C150	3637 H143	6657 H18	
2582 C151	3638 H144	6658 H18	
2583 C152	3639 H145	6659 H18	
2584 C153	3640 H146	6660 H18	
2585 C154	3641 H147	6661 H18	
2586 C155	3642 H148	6662 H18	
2587 C156	3643 H149	6663 H18	
2588 C157	3644 H150	6664 H18	
2589 C158	3645 H151	6665 H18	
2590 C159	3646 H152	6666 H18	
2591 C160	3647 H153	6667 H18	
2592 C161	3648 H154	6668 H18	
2593 C162	3649 H155	6669 H18	
2594 C163	3650 H156	6670 H18	
2595 C164	3651 H157	6671 H18	
2596 C165	3652 H158	6672 H18	
2597 C166	3653 H159	6673 H18	
2598 C167	3654 H160	6674 H18	
2599 C168	3655 H161	6675 H18	
2600 C169	3656 H162	6676 H18	
2601 C170	3657 H163	6677 H18	
2602 C171	3658 H164	6678 H18	
2603 C172	3659 H165	6679 H18	
2604 C173	3660 H166	6680 H18	
2605 C174	3661 H167	6681 H18	
2606 C175	3662 H168	6682 H18	
2607 C176	3663 H169	6683 H18	
2608 C177	3664 H170	6684 H18	
2609 C178	3665 H171	6685 H18	
2610 C179	3666 H172	6686 H18	
2611 C180	3667 H173	6687 H18	
2612 C181	3668 H174	6688 H18	
2613 C182	3669 H175	6689 H18	
2614 C183	3670 H176	6690 H18	
2615 C184	3671 H177	6691 H18	
2616 C185	3672 H178	6692 H18	
2617 C186	3673 H179	6693 H18	
2618 C187	3674 H180	6694 H18	
2619 C188	3675 H181	6695 H18	
2620 C189	3676 H182	6696 H18	
2621 C190	3677 H183	6697 H18	
2622 C191	3678 H184	6698 H18	
2623 C192	3679 H185	6699 H18	
2624 C193	3680 H186	6700 H18	
2625 C194	3681 H187	6701 H18	
2626 C195	3682 H188	6702 H18	
2627 C196	3683 H189	6703 H18	
2628 C197	3684 H190	6704	












## Waveform (A)

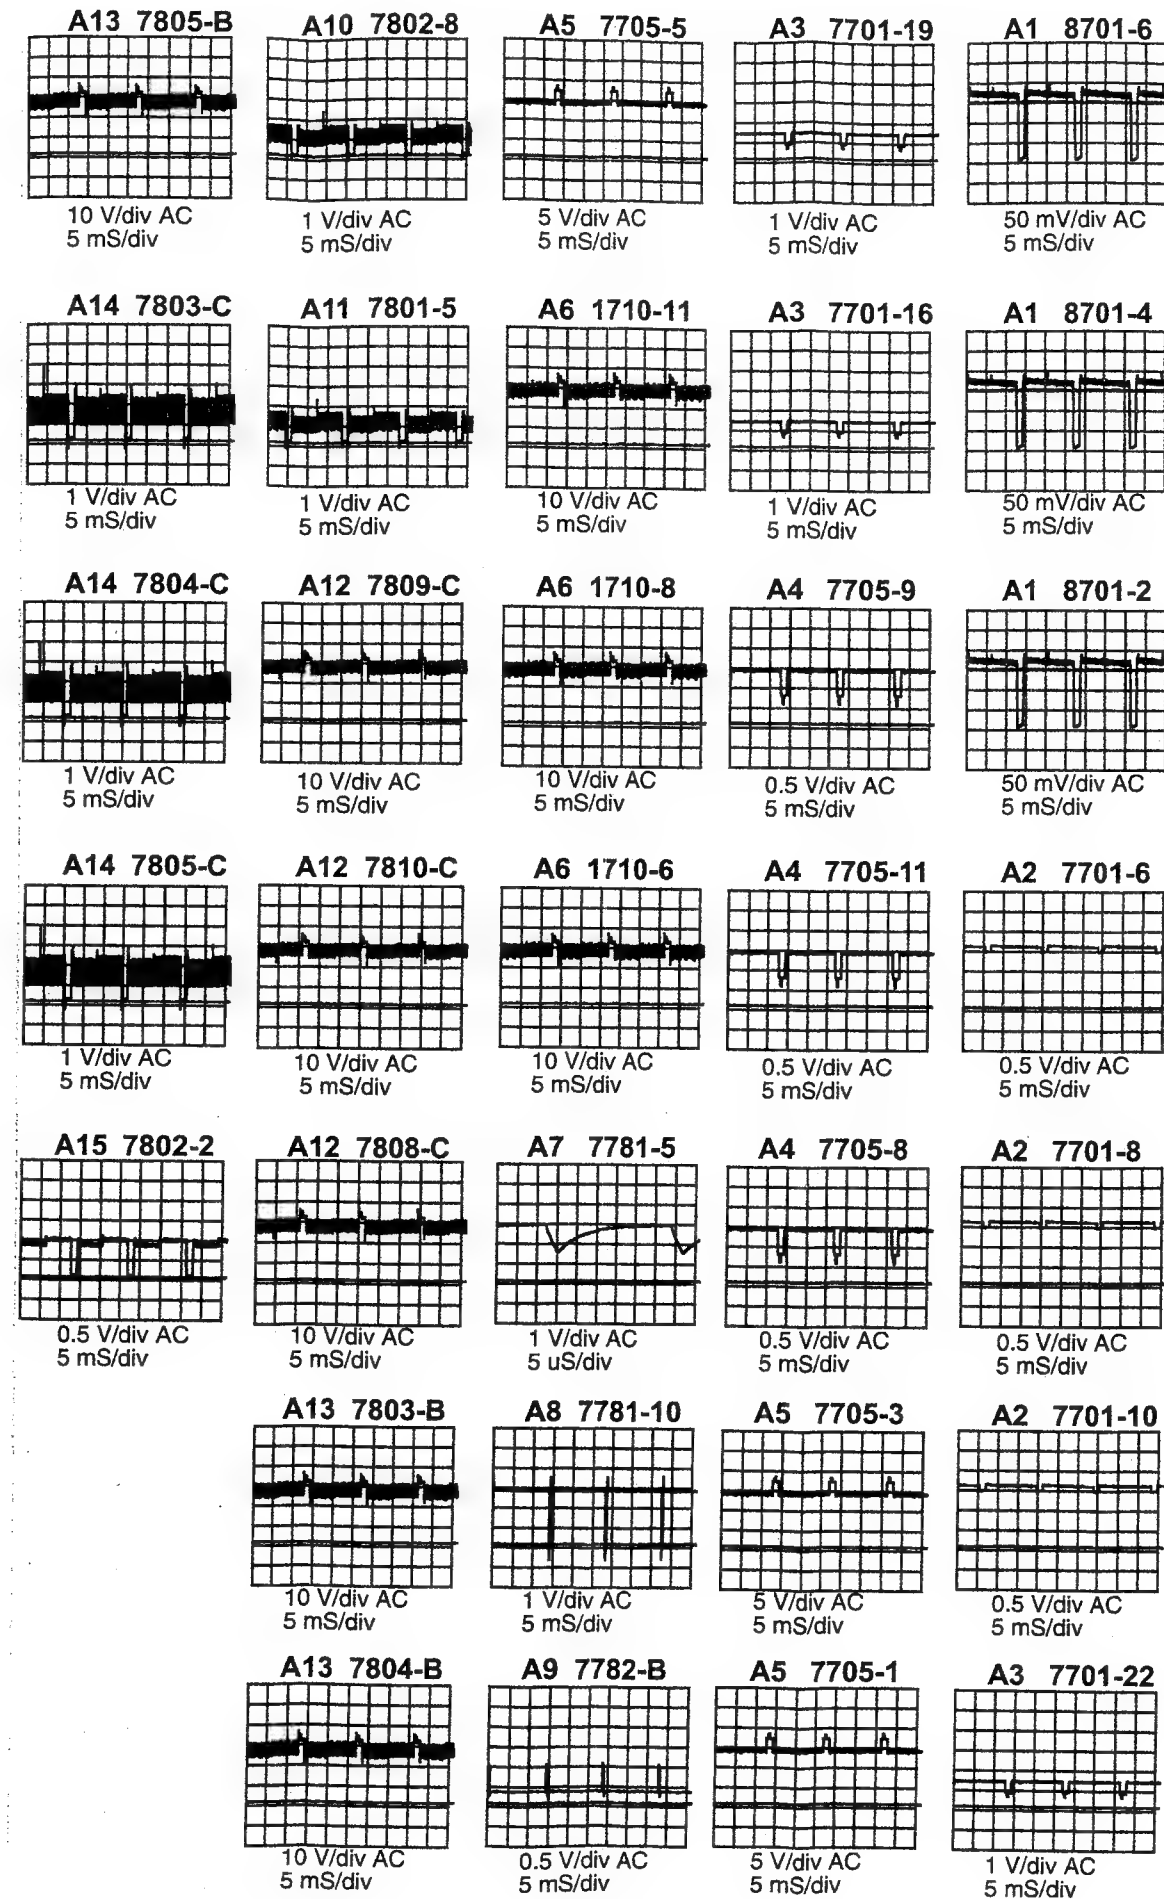

## Waveform (B)


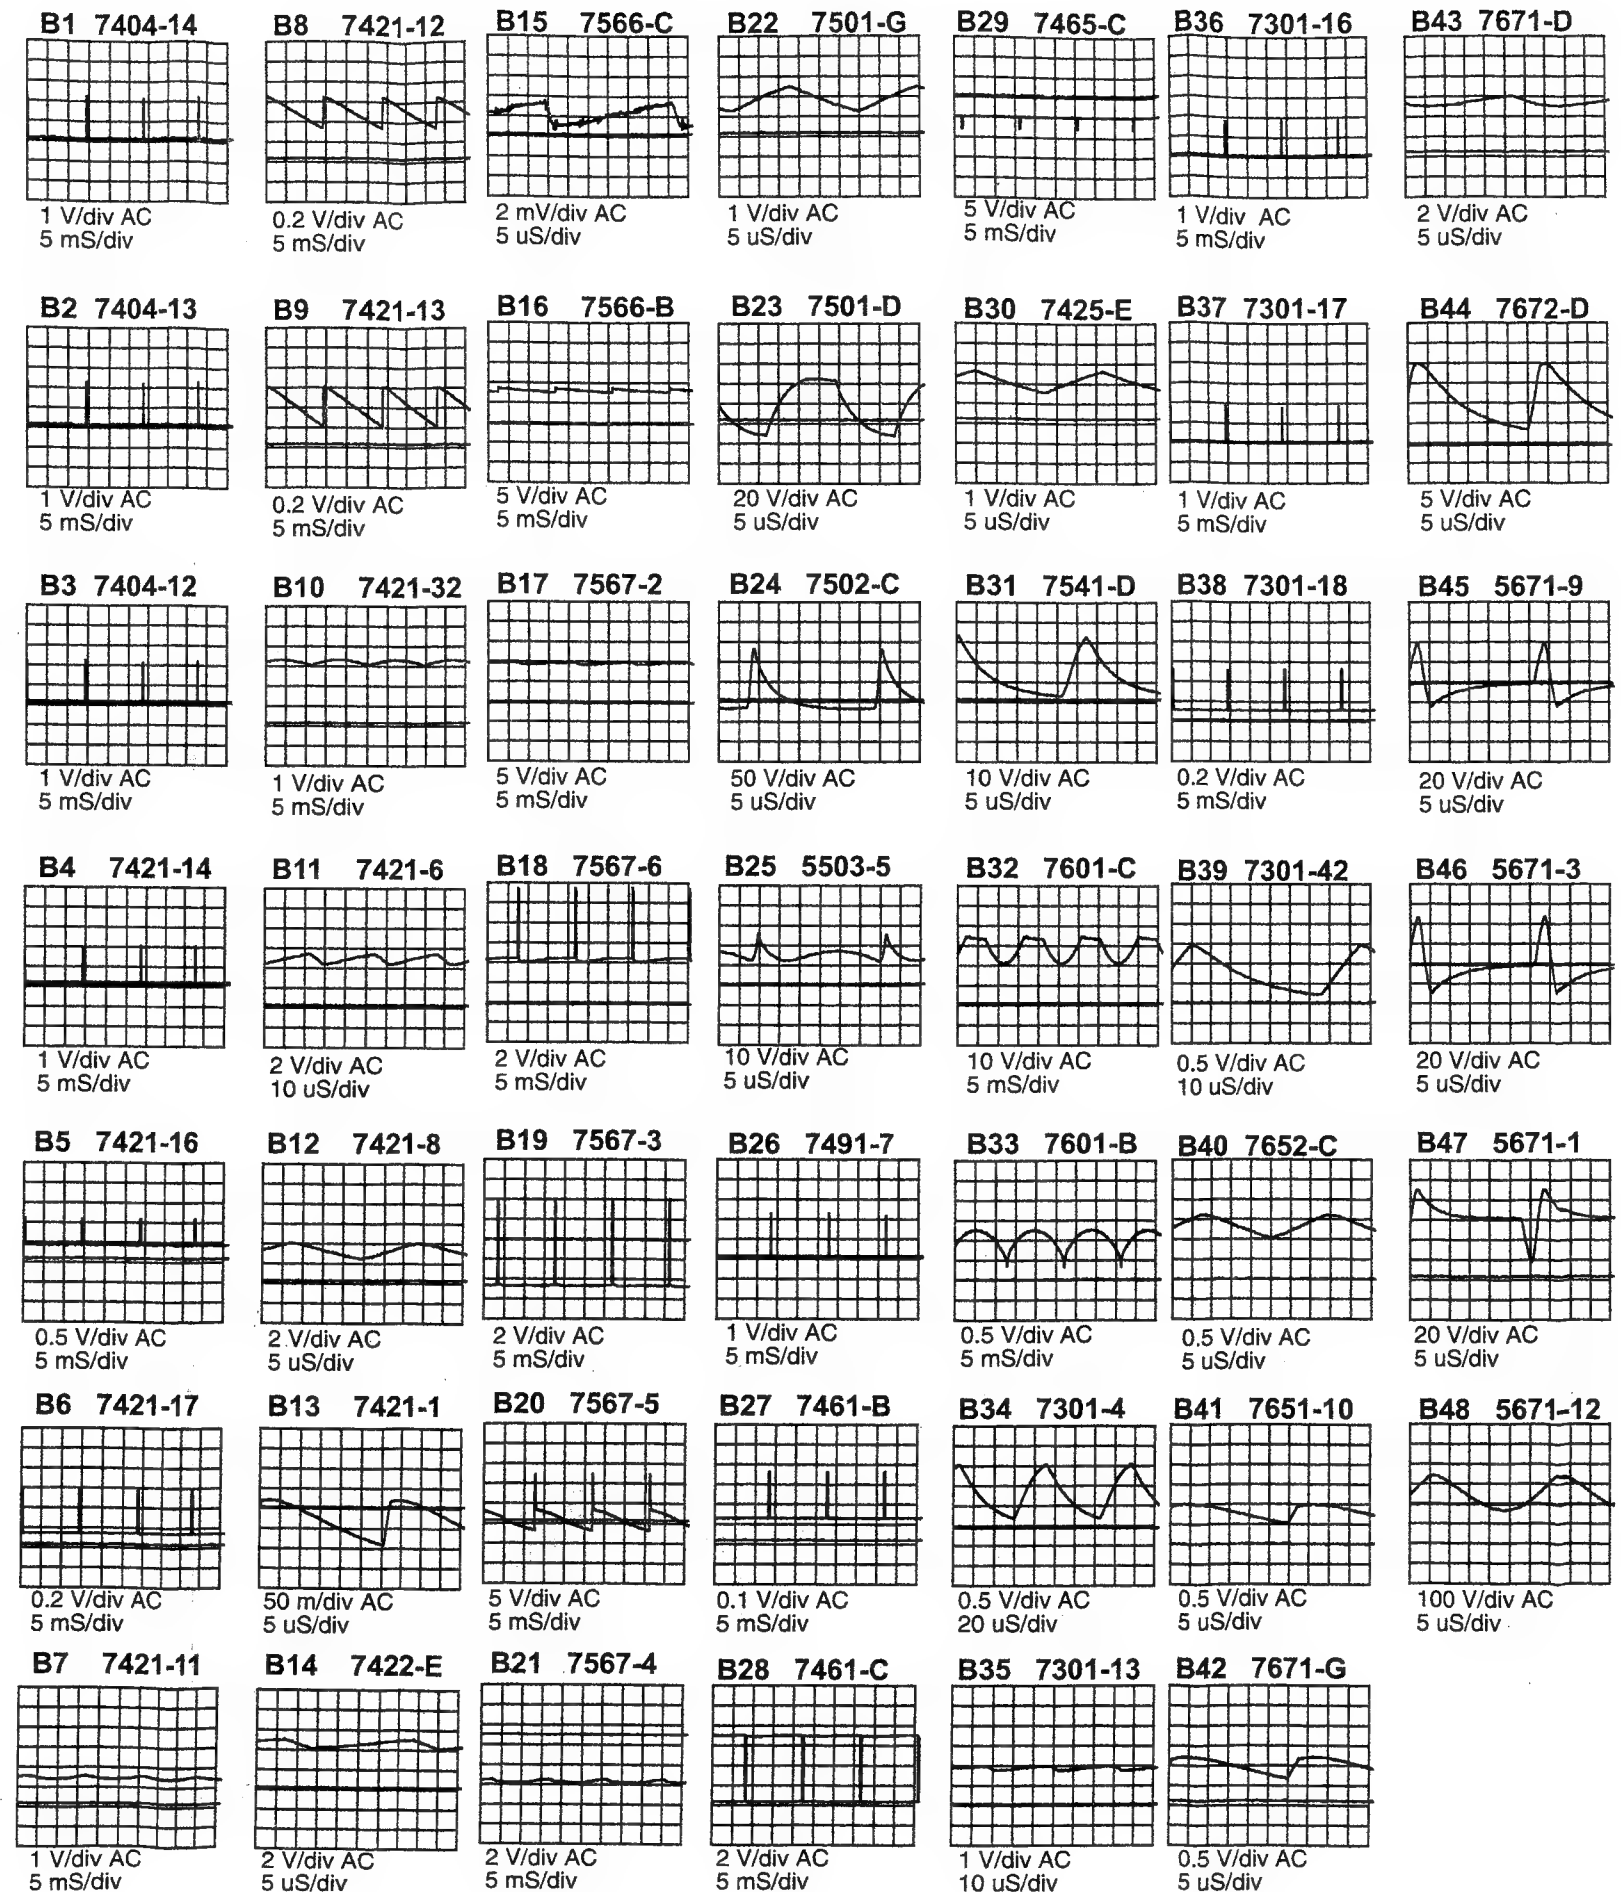


**A16 7001-3**0.5 V/div AC  
5 mS/div**A20 7001-27**1 V/div AC  
5 mS/div**A16 7001-7**0.5 V/div AC  
5 mS/div**A20 7001-29**1 V/div AC  
5 mS/div**A16 7001-11**0.5V/div AC  
5 mS/div**A17 7001-16**0.5 V/div AC  
5 mS/div**A18 7001-18**0.5V/div AC  
5 mS/div**A19 7001-19**1V/div AC  
10  $\mu$ S/div**A20 7001-23**1V/div AC  
5 mS/div






# PCB (B, C)

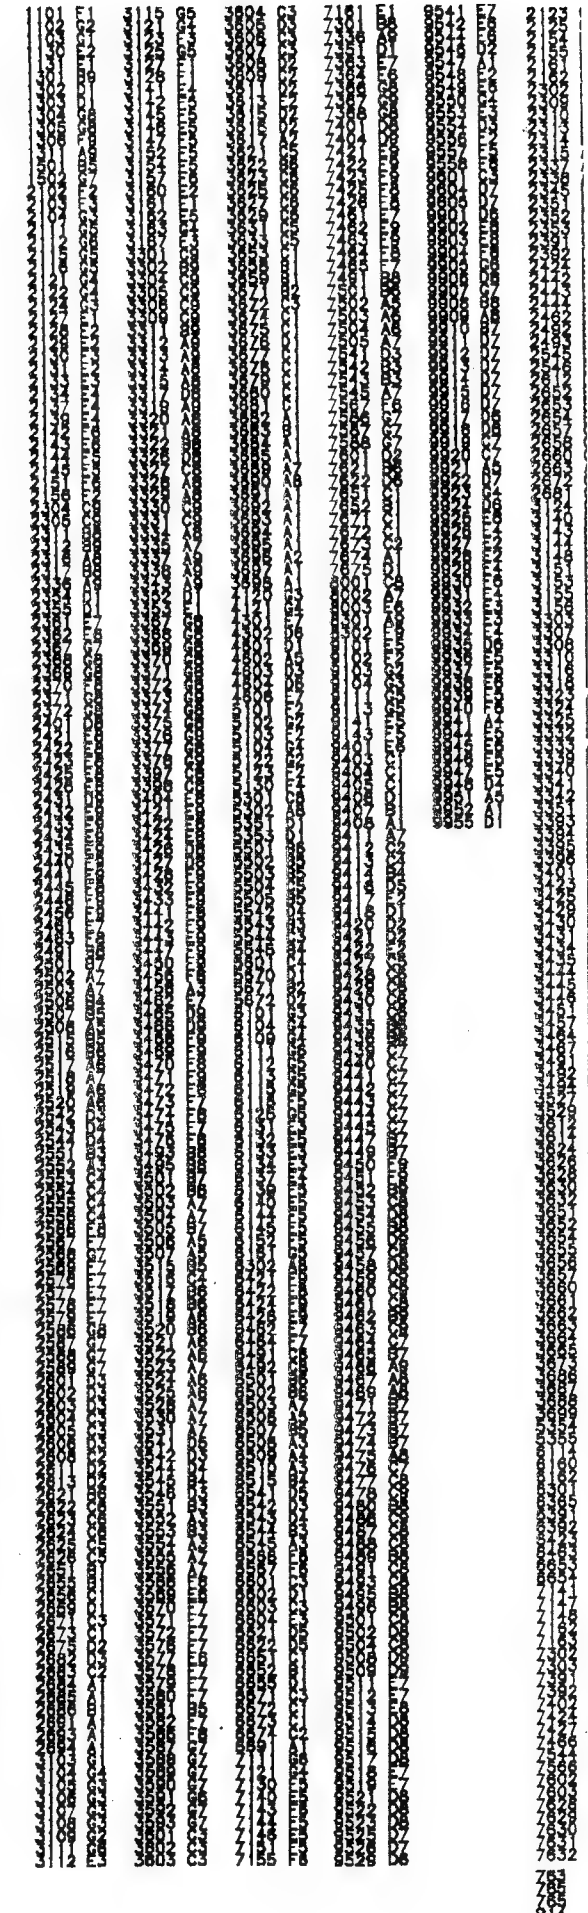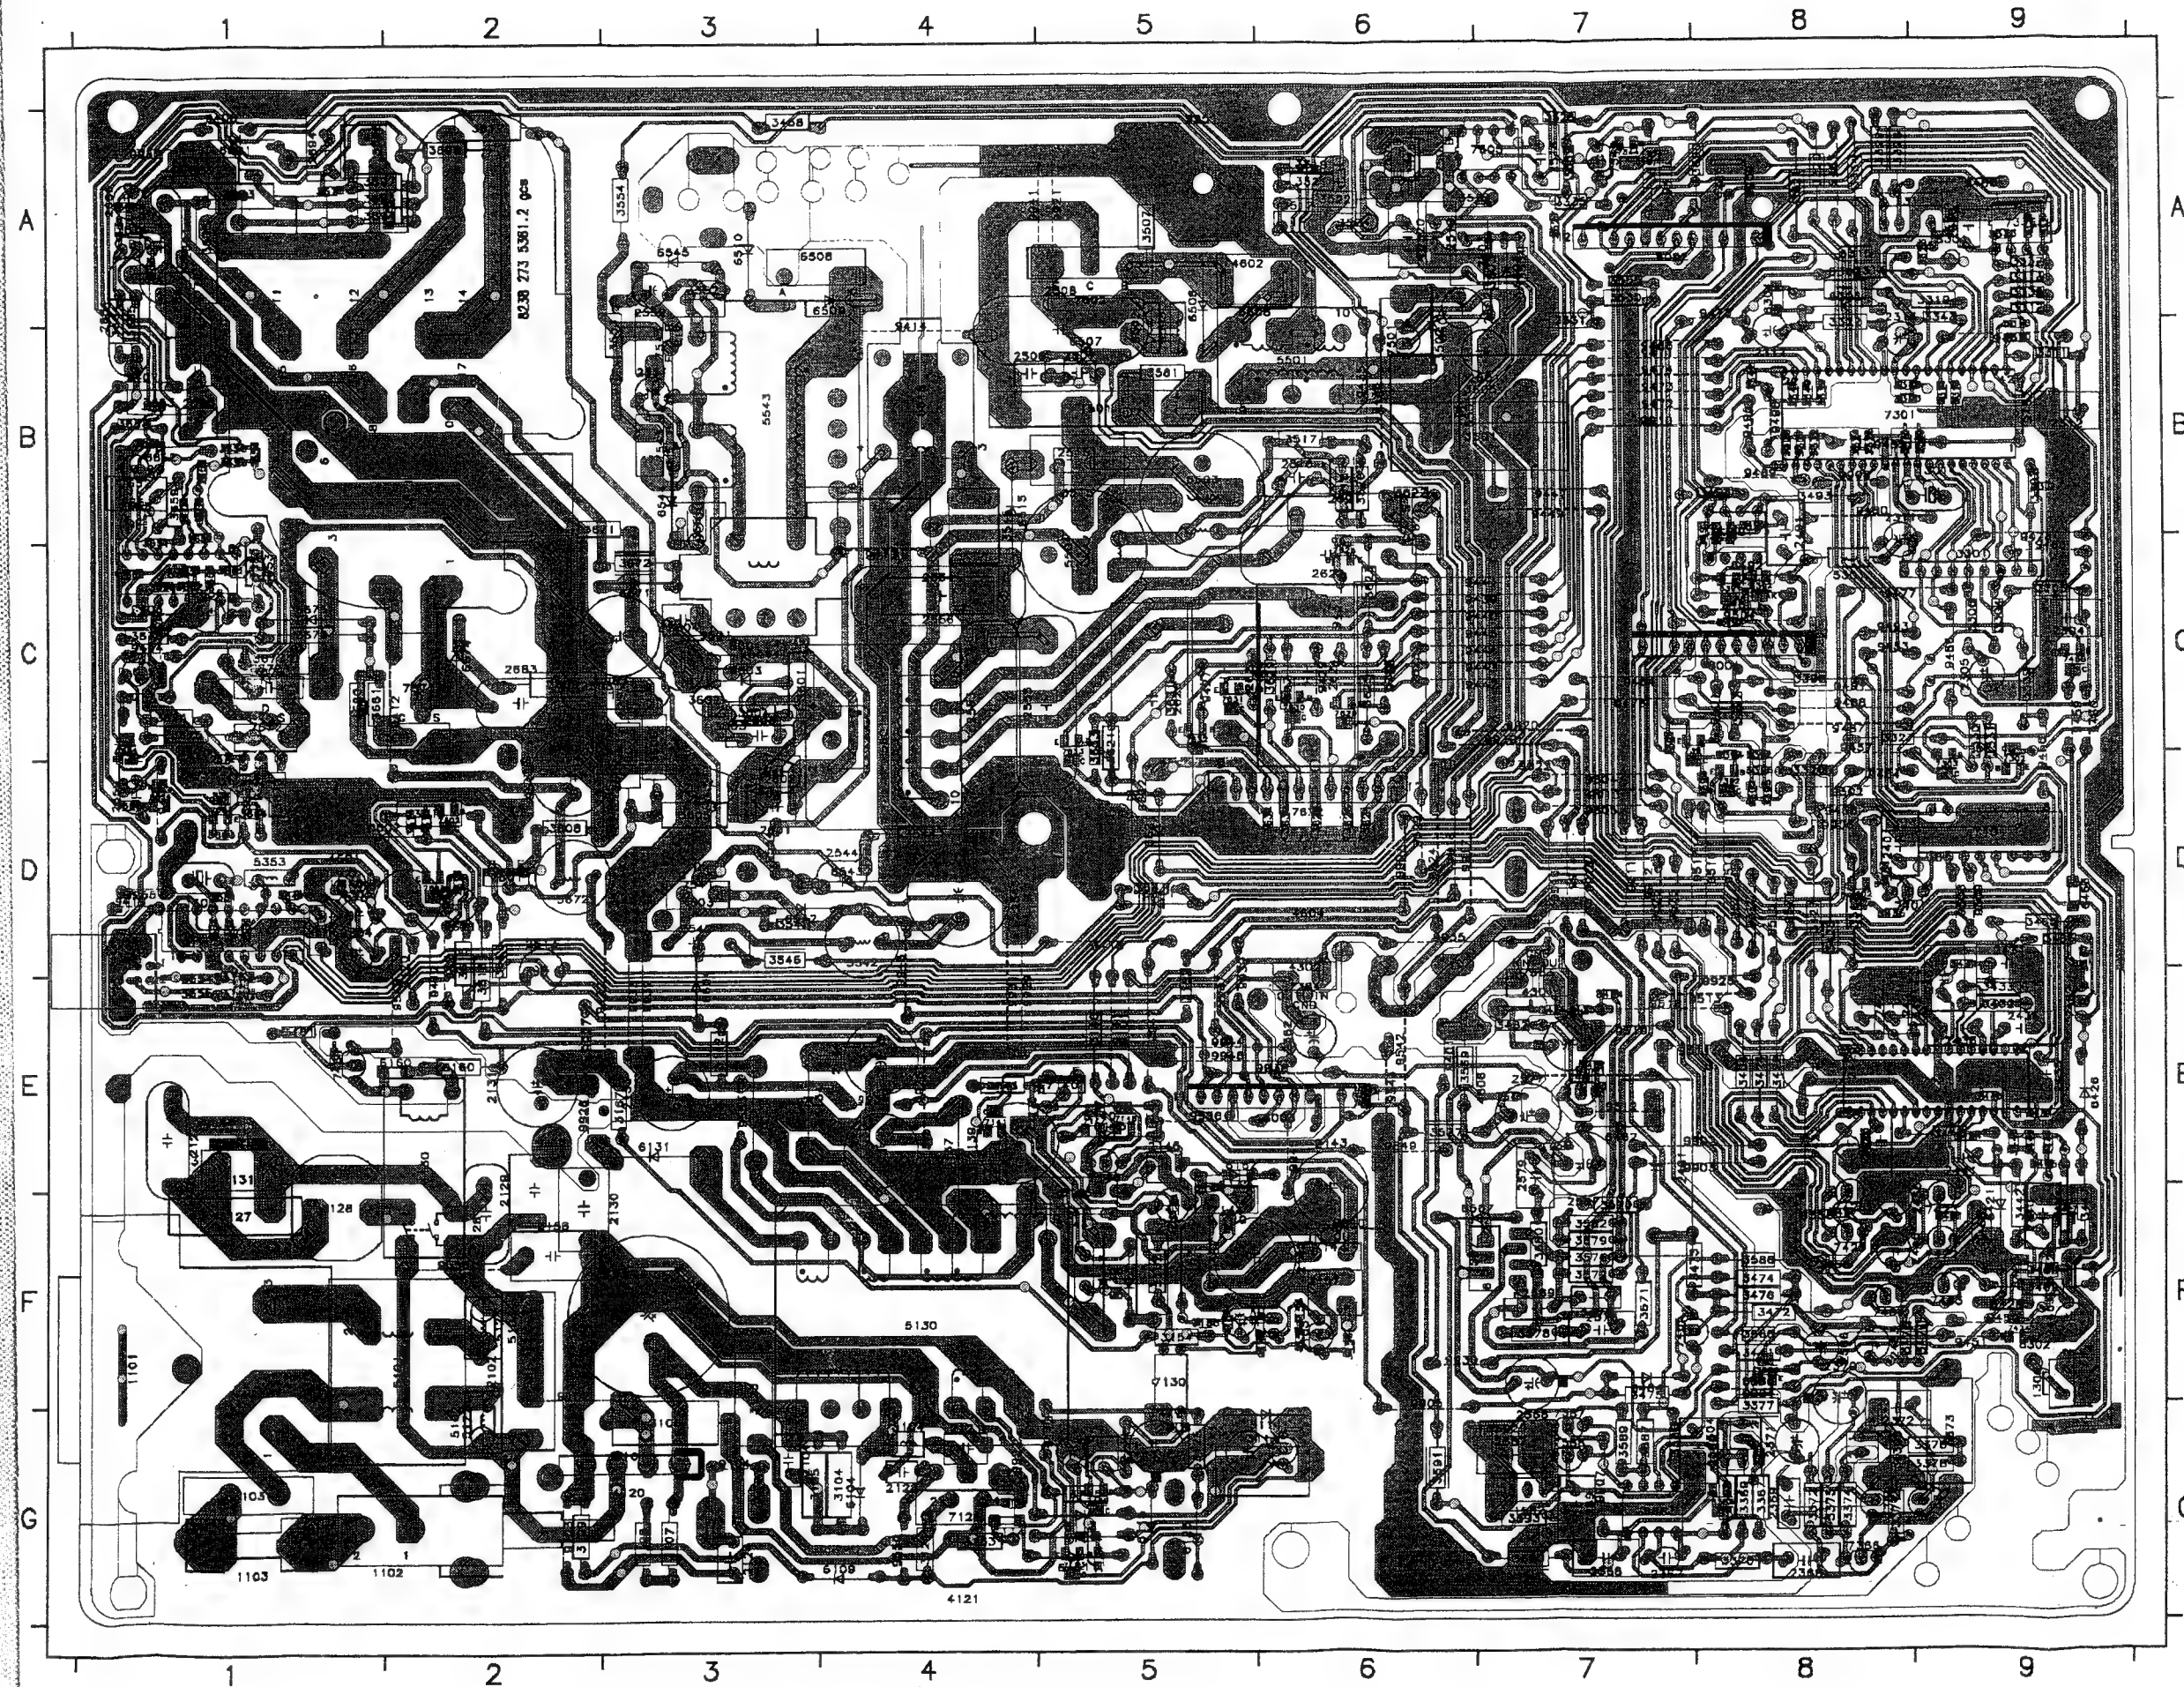

## Power Supply Schematic Diagram

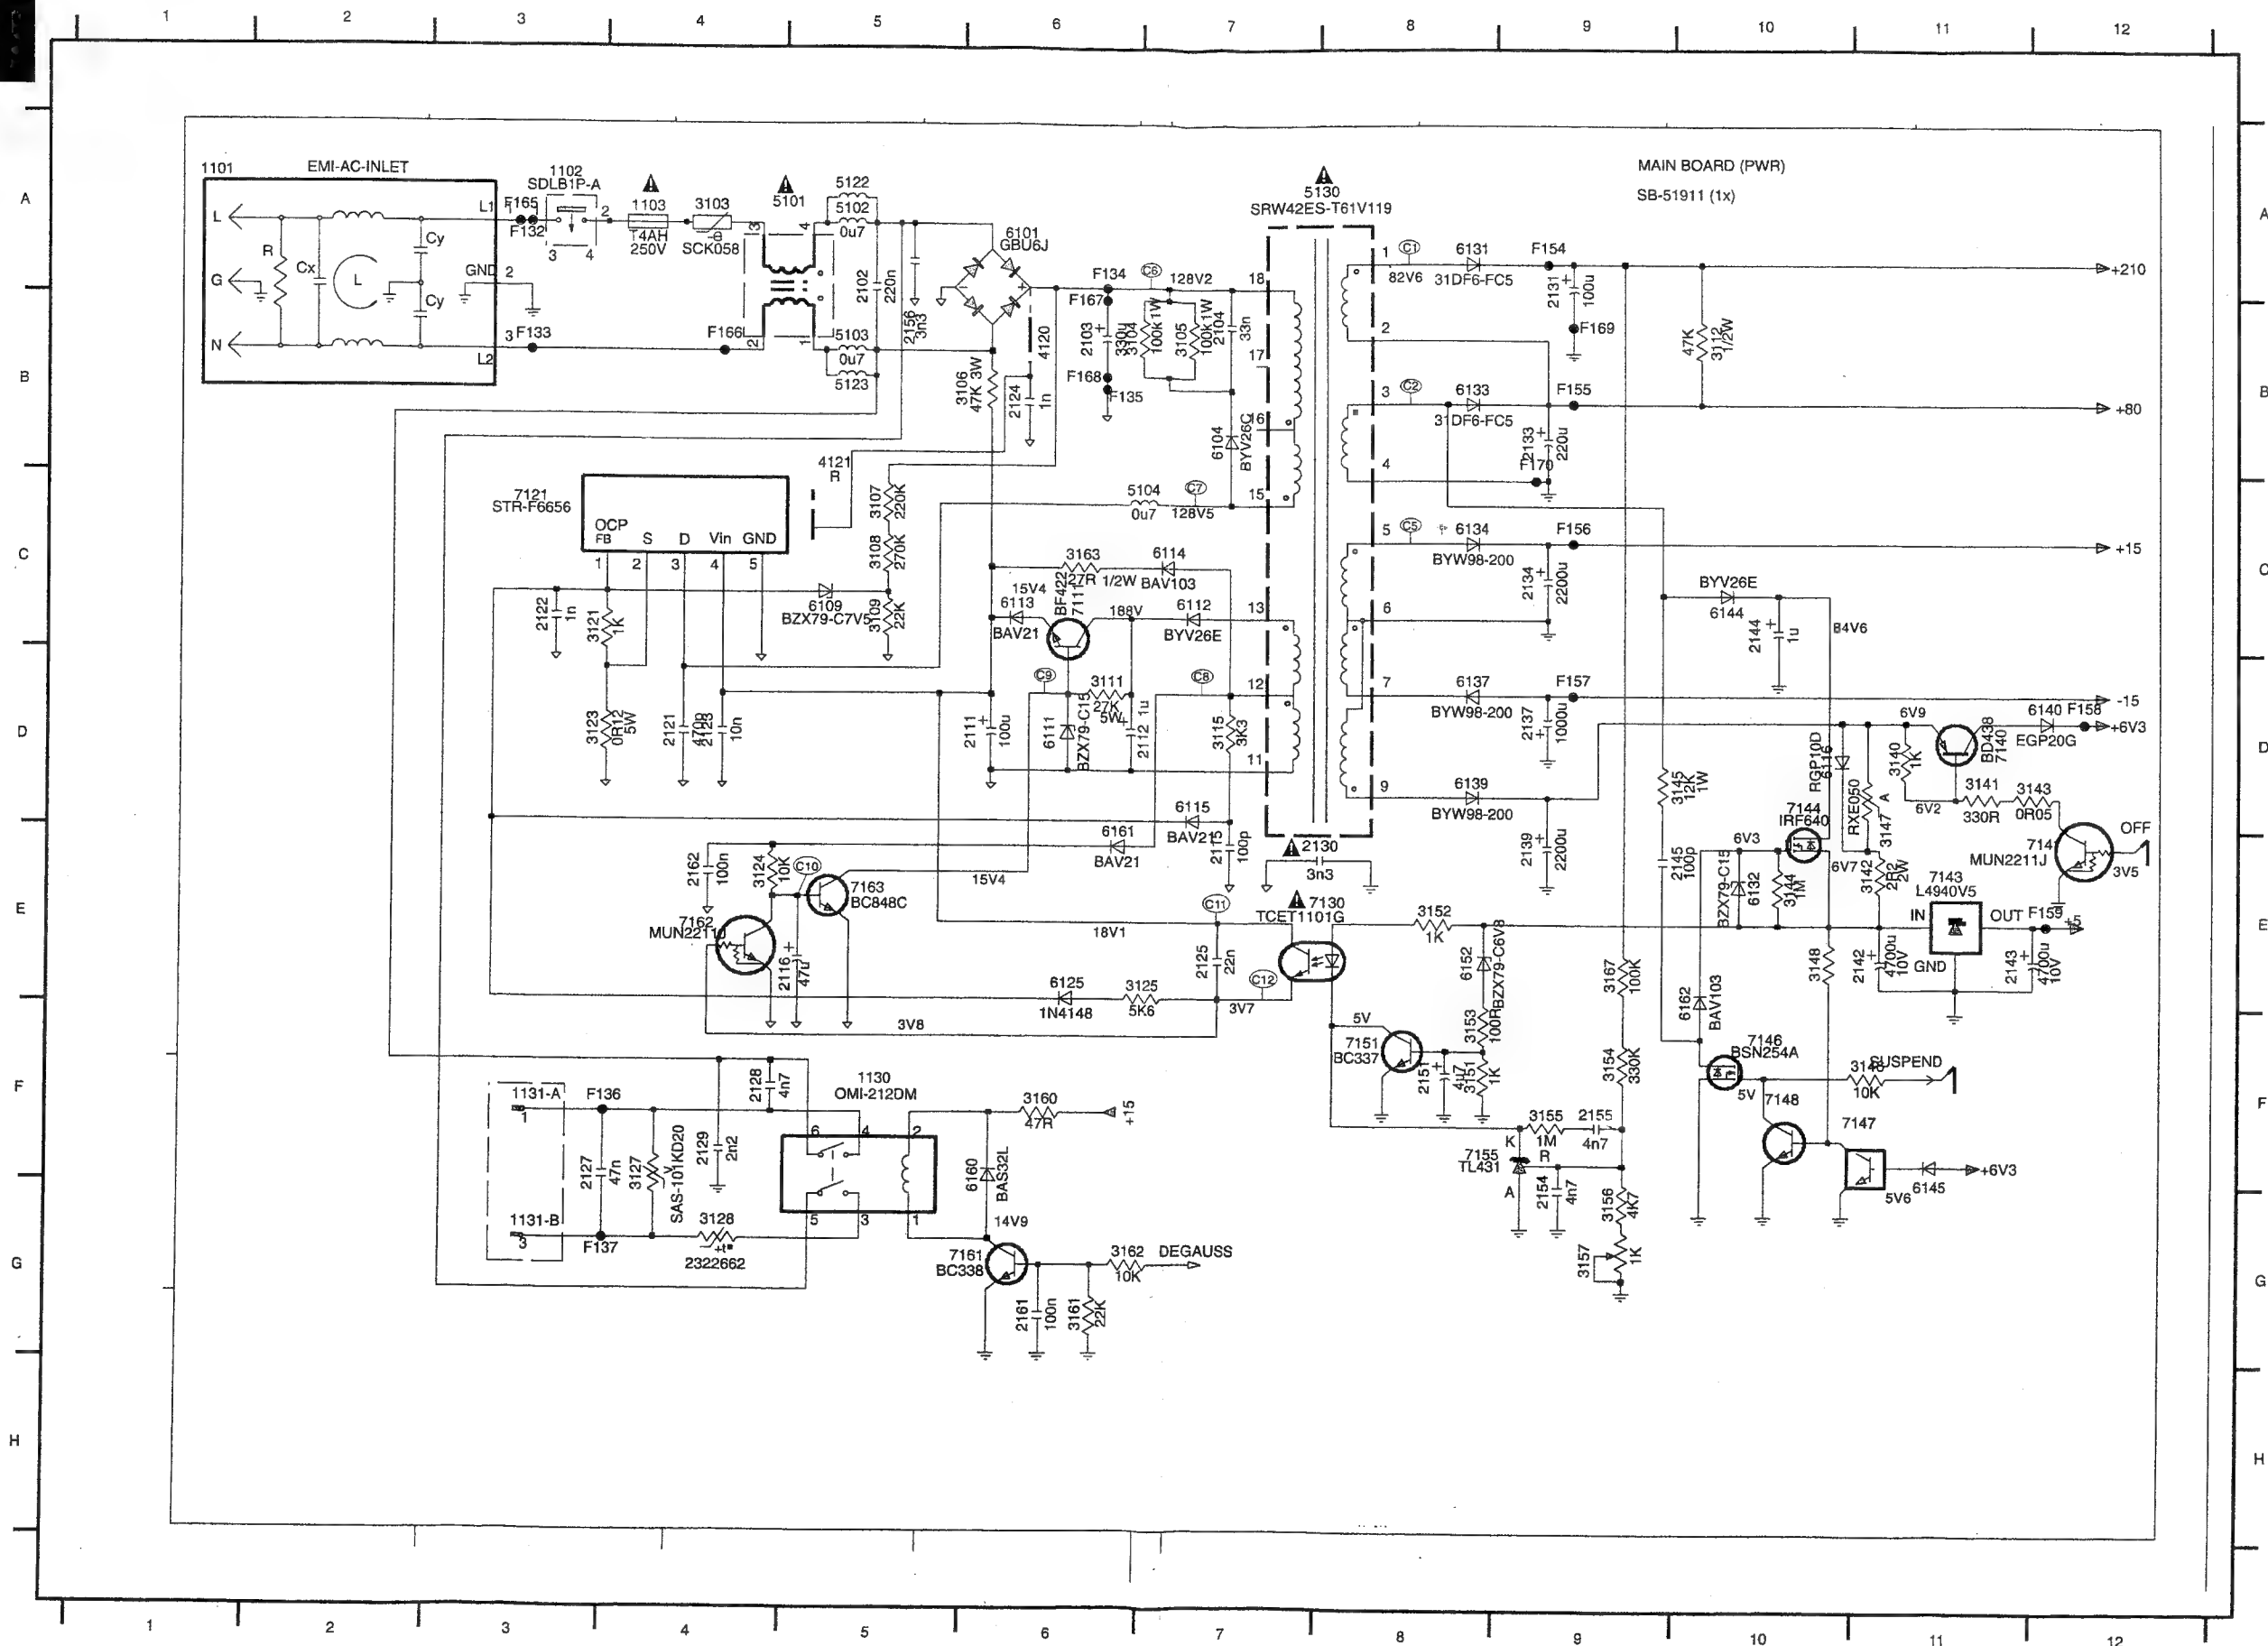


1101 A1	6144 C10
1102 A3	6145 F11
1103 A4	6152 E8
1130 F5	6160 F6
1131-A F3	6161 E6
1131-B G3	6162 E10
2102 A5	7111 C5
2103 B6	7121 C3
2104 B7	7130 E8
2111 D6	7140 D11
2112 D7	7141 E12
2115 E7	7143 E11
2116 E5	7144 D10
2121 D4	7146 F10
2122 C3	7147 F11
2123 D4	7148 F10
2124 B6	7151 F8
2125 E7	7155 F8
2127 F3	7161 G6
2128 F4	7162 E4
2129 F4	7163 E5
2130 E7	7132 A3
2131 A9	7133 B3
2133 B9	7134 A6
2134 C9	7135 B6
2135 A8	7136 F4
2136 B8	7137 G3
2137 D9	7154 A9
2139 E9	7155 B9
2142 E11	7156 C9
2143 E11	7157 D9
2144 C10	7158 D12
2145 E10	7159 E12
2151 F8	7165 A3
2154 G9	7166 B4
2155 F9	7167 B6
2156 B5	7168 B6
2161 G6	7169 B9
2162 E4	7170 B9
3103 A4	
3104 B6	
3105 B7	
3106 B5	
3107 C5	
3108 C5	
3109 C5	
3111 D6	
3112 B10	
3115 D7	
3121 C3	
3123 D3	
3124 E4	
3125 E7	
3127 F4	
3128 G4	
3140 D11	
3141 D11	
3142 E11	
3143 D12	
3144 E10	
3145 D10	
3146 F11	
3147 D11	
3148 E10	
3151 F8	
3152 E8	
3153 F8	
3154 F9	
3155 F9	
3156 G9	
3157 G9	
3160 F6	
3161 G6	
3162 G6	
3163 C6	
3167 E9	
4120 B6	
4121 B5	
5101 A4	
5102 A5	
5103 B5	
5104 C6	
5105 A8	
5106 B8	
5122 A5	
5123 B5	
5130 A7	
6101 A6	
6104 B7	
6109 C5	
6111 D6	
6112 C7	
6113 C6	
6114 C7	
6115 D7	
6116 D10	
6125 E6	
6131 A8	
6132 B8	
6134 C8	
6137 D8	
6139 D8	
6140 D12	




## Waveform (C)

**C1 5130-1**




10 V/div AC  
2  $\mu$ S/div

**C8 5130-12**




10 V/div AC  
5 mS/div

**C2 5130-3**




5 V/div AC  
2  $\mu$ S/div

**C9 7111-B**




5 V/div AC  
5 mS/div

**C3 5130-5**




0.5 V/div AC  
2  $\mu$ S/div

**C10 7163-B**




5 V/div AC  
5 mS/div

**C4 5130-5**




0.5 V/div AC  
2  $\mu$ S/div

**C11 7130-4**




5 V/div AC  
5 mS/div

**C5 5130-9**




0.2 V/div AC  
2  $\mu$ S/div

**C12 7130-3**




5 V/div AC  
5 mS/div

**C6 5130-18**




5 V/div AC  
5 mS/div

**C7 5130-18**



10 V/div AC  
5 mS/div


1891 A2 1893 A2 1895 A4 3892 A3 3894 A3 6891 A1  
 1892 A2 1894 A3 3891 A2 3893 A2 3895 A3 6891 A1

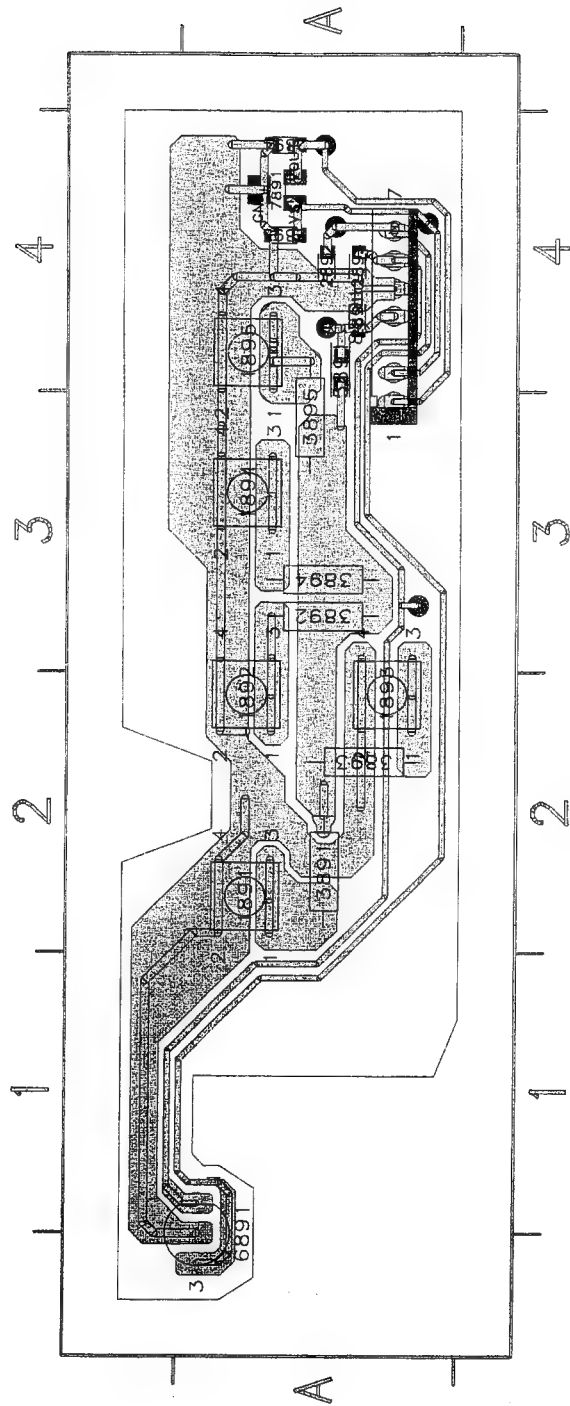

2891 A4 2892 A4 2893 A4 2894 A4 2895 A4 5891 A4 7891 A4



CONTROL BOARD  
SB-52291  
PB-52301 (12x)

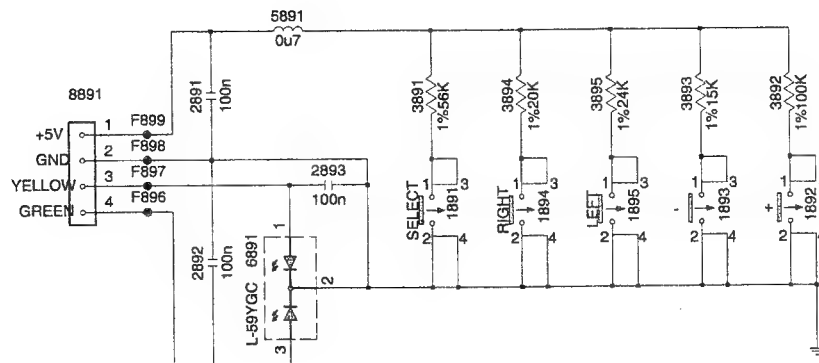

## 0. Warning

All ICs and many other semi-conductors are susceptible to electrostatic discharges (ESD). Careless handling during repair can reduce life drastically. When repairing, make sure that you are connected with the same potential as the mass of the unit via a wrist wrap with resistance. Keep components and tools also at the same potential !

## 1. Servicing of SMDs (Surface Mounted Devices)


### 1.1 General cautions on handling and storage

- Oxidation on the terminals of SMDs results in poor soldering. Do not handle SMDs with bare hands.
- Avoid using storage places that are sensitive to oxidation such as places with sulphur or chlorine gas, direct sunlight, high temperatures or a high degree of humidity. The capacitance or resistance value of the SMDs may be affected by this.
- Rough handling of circuit boards containing SMDs may cause damage to the components as well as the circuit boards. Circuit boards containing SMDs should never be bent or flexed. Different circuit board materials expand and contract at different rates when heated or cooled and the components and/or solder connections may be damaged due to the stress. Never rub or scrape chip components as this may cause the value of the component to change. Similarly, do not slide the circuit board across any surface.

### 1.2 Removal of SMDs

- Heat the solder (for 2-3 seconds) at each terminal of the chip. By means of litz wire and a slight horizontal force, small components can be removed with the soldering iron. They can also be removed with a solder sucker (see Fig. 1A)

Fig. 1 DISMOUNTING

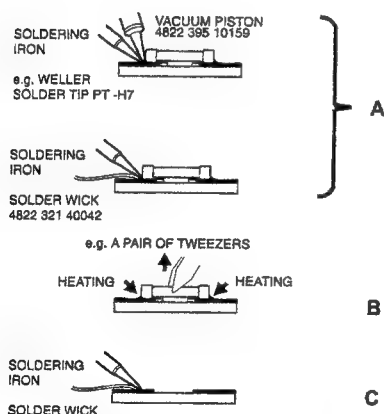

- While holding the SMD with a pair of tweezers, take it off gently using the soldering iron's heat applied to each terminal (see Fig. 1 B).
- Remove the excess solder on the solder lands by means of litz wire or a solder sucker (see Fig. 1C).

### 1.3 Caution on removal

- When handling the soldering iron, use suitable pressure and be careful.
- When removing the chip, do not use undue force with the pair of tweezers.
- The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250 °C).
- The chip, once removed, must never be reused.


### 1.4 Attachment of SMDs

- Locate the SMD on the solder lands by means of tweezers and

solder the component on one side. Ensure that the component is positioned correctly on the solder lands (see Fig. 2A).

- Next complete the soldering of the terminals of the component (see Fig. 2B).


Fig. 2 MOUNTING

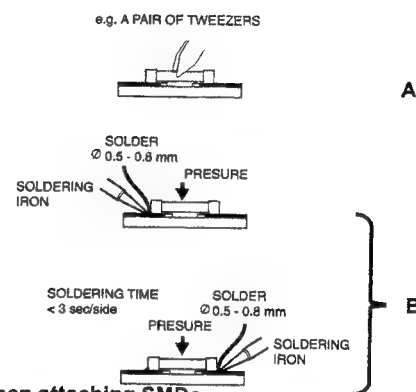


## 2. Caution when attaching SMDs

- When soldering the SMD terminals, do not touch them directly with the soldering iron. The soldering should be done as quickly as possible, care must be taken to avoid damage to the terminals of the SMDs themselves.
- Keep the SMD's body in contact with the printed board when soldering.
- The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250 °C).
- Soldering should not be done outside the solder land.
- Soldering flux (of rosin) may be used, but should not be acidic.
- After soldering, let the SMD cool down gradually at room temperature.
- The quantity of solder must be proportional to the size of the solder land. If the quantity is too great, the SMD might crack or the solder lands might be torn loose from the printed board (see Fig. 3).

Fig. 3 Examples

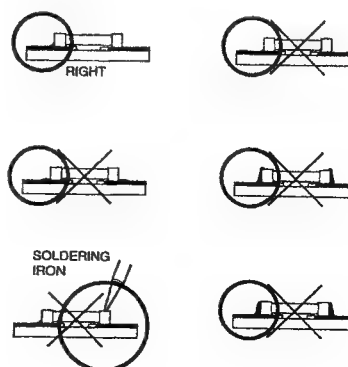

## Exploded View

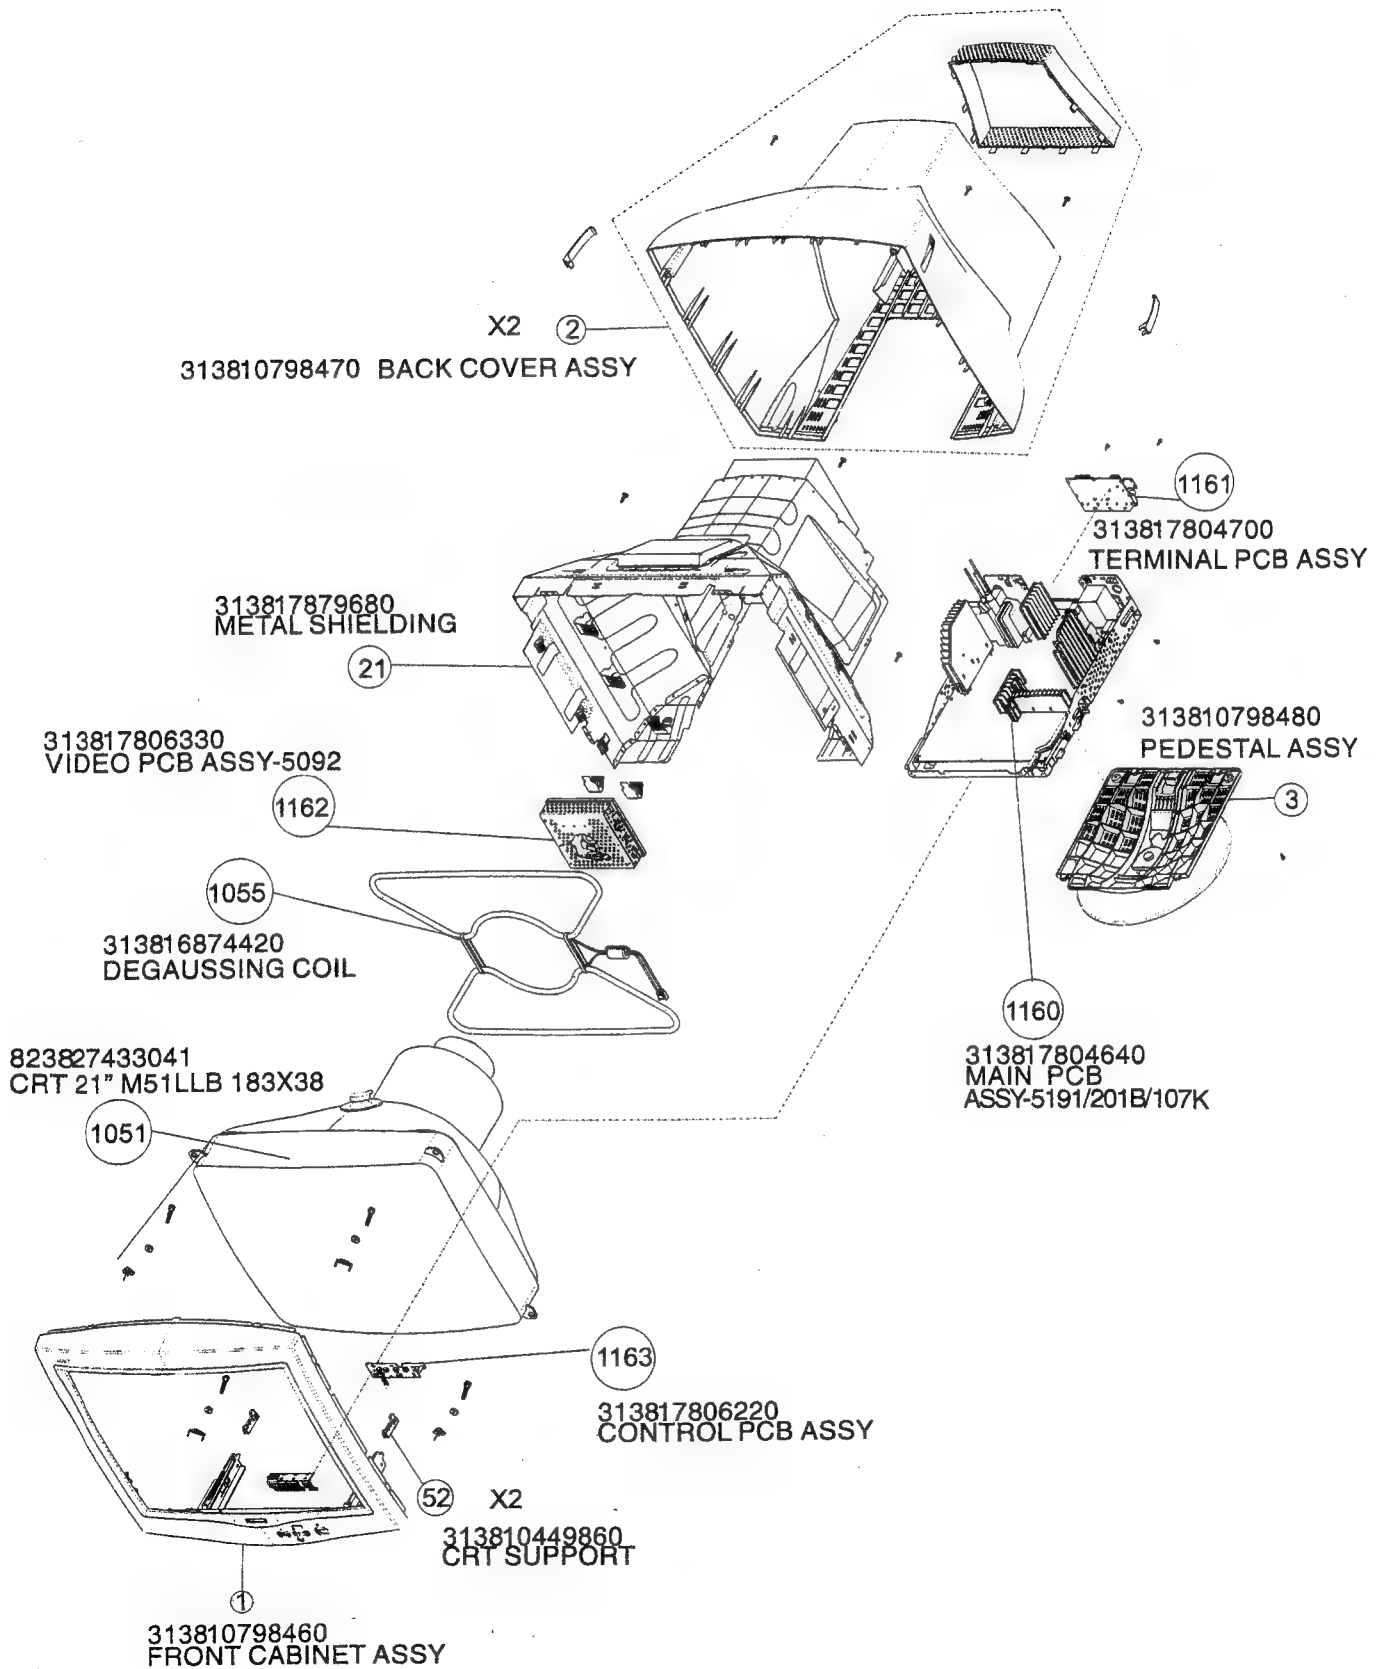

# Belinea 108025

## Spare Parts List

partnumber	Location No.	DESCRIPTION	SPEC.
3138 127 50280	0110	FRONT PANEL, PLASTIC	FRONT CABINET ASSY
3138 127 50290	0250	REAR COVER	BACK COVER ASSY
3138 127 50270	0310	PEDESTAL, PLASTIC	PEDESTAL ASSY
3138 107 98050	0390	CONTROL PANEL	OSD CONTROL ASSY
3138 104 48340	0550	KNOB, PLASTIC	ROTARY KNOB
3138 104 54300	0570	COVER, PLASTIC	SCREW COVER-R
3138 104 54290	0590	COVER, PLASTIC	SCREW COVER-L
3138 104 52050	0630	CUSHION, RUBBER	SPONGE
4822 701 20292	0870	SCREW, STEEL	
3138 105 40040	0990	DOC DIRECTIONS FOR USE	D.F.U.
3138 106 58560	1130	BOX, PAPERBOARD	CARTON
3138 106 58090	1150	CUSHION, STYROFOAM	CUSHION - TOP
3138 106 58100	1170	CUSHION, STYROFOAM	CUSHION - BOTTOM
3138 106 55670	1190	BAG, PLASTIC	P.E. BAG
3138 106 58560	1290	BOX, PAPERBOARD	CARTON
3138 106 58090	1310	CUSHION, STYROFOAM	CUSHION - TOP
3138 106 58100	1330	CUSHION, STYROFOAM	CUSHION - BOTTOM
3138 178 78740	4370	CORD, MAINS	MAIN CORD ASSY
3138 168 77520	4390	CABLE, CONNECTING	I/F CABLE
3138 168 74420	4410	COIL, DEGAUSSING	DEGAUSSING COIL
4822 526 20183	4430	STRIP, PLASTIC	SPOILER
3138 127 50280	FRONT PANEL, PLASTIC	FRONT CABINET ASSY	
3138 104 53620	0170	PUSH BUTTON, PLASTIC	POWER KNOB
3138 104 53770	0190	LENS, PLASTIC	LENS-LED
3138 127 50290	REAR COVER	BACK COVER ASSY	
3138 104 54680	0290	REAR COVER	REAR-COVER-LONG
3138 127 50270	PEDESTAL, PLASTIC	PEDESTAL ASSY	
3138 104 54240	0310	BASE, PLASTIC	BASE
3138 104 54250	0330	SWIVEL, PLASTIC	SWIVEL
3138 107 98050	CONTROL PANEL	OSD CONTROL ASSY	
3138 104 48300	0390	KNOB, PLASTIC	KNOB-FUNCTION-L
3138 104 48310	0410	KNOB, PLASTIC	KNOB-FUNCTION-R
3138 104 48320	0430	KNOB, PLASTIC	KNOB-FUNCTION-C
3138 178 51040	201BMAX-H SEMIFINISHED SET		
9322 150 36682	1370	PICTURE TUBE, MONITOR MONOCHR. M51LLB183X38(BH)	
3138 188 05200	201BMAX-107K ALL CHASSIS KIT		
3138 178 51050	1410	PR.CIRCUIT, MONITOR	201BMAX-MAIN PCB ASSY
3138 178 04700	2330	PR.CIRCUIT, MONITOR	TERMINAL PCB ASSY
3138 178 51480	3510	PR.CIRCUIT, MONITOR	201BMAX-ENCORDER PCB ASSY
3138 178 51110	3890	PR.CIRCUIT, MONITOR	109P MAX-LED PCB ASSY
3138 178 50320	4050	PR.CIRCUIT, MONITOR	POWER DOWN PCB ASSY
3138 178 51490	8030	PR.CIRCUIT, MONITOR	201BMAX-VIDEO PCB ASSY
3138 178 51050	PR.CIRCUIT, MONITOR	201BMAX-MAIN PCB ASSY	
3138 178 51160	0000	IC DIG MOS MICROPROCESSOR	OTP CPU ASSY (MAX 19/21/V202)
4822 050 24701	0010	RESISTOR, FIXED, OTHERS <20W	470R00 1% 0,6W
4822 050 24701	0030	RESISTOR, FIXED, OTHERS <20W	470R00 1% 0,6W
4822 050 12202	0050	RESISTOR, FIXED, OTHERS <20W	2K20 1% 0,4W
4822 052 11108	0070	RESISTOR, FIXED, OTHERS <20W	1R00 5% 0,5W

4822 050 24709	0090	RESISTOR, FIXED, OTHERS <20W	47R00	1%	0,6W
4822 050 21808	0110	RESISTOR, FIXED, OTHERS <20W	1R80	1%	0,6W
4822 050 22208	0130	RESISTOR, FIXED, OTHERS <20W	2R20	1%	0,6W
4822 050 21801	0150	RESISTOR, FIXED, OTHERS <20W	180R00	1%	0,6W
4822 050 21808	0170	RESISTOR, FIXED, OTHERS <20W	1R80	1%	0,6W
4822 050 11802	0190	RESISTOR, FIXED, OTHERS <20W	1K80	1%	0,4W
4822 050 21003	0210	RESISTOR, FIXED, OTHERS <20W	10K00	1%	0,6W
4822 050 21002	0230	RESISTOR, FIXED, OTHERS <20W	1K00	1%	0,6W
4822 050 21003	0250	RESISTOR, FIXED, OTHERS <20W	10K00	1%	0,6W
4822 052 11689	0270	RESISTOR, FIXED, OTHERS <20W	68R00	5%	0,5W
4822 052 11689	0290	RESISTOR, FIXED, OTHERS <20W	68R00	5%	0,5W
4822 050 24701	0310	RESISTOR, FIXED, OTHERS <20W	470R00	1%	0,6W
4822 050 21001	0330	RESISTOR, FIXED, OTHERS <20W	100R00	1%	0,6W
4822 116 10076	0350	RESISTOR, NON-LINEAR	300R		
4822 053 21224	0370	RESISTOR, FIXED, OTHERS <20W	220K00	5%	0,5W
4822 053 21104	0390	RESISTOR, FIXED, OTHERS <20W	100K00	5%	0,5W
4822 117 10118	0410	RESISTOR, FIXED, OTHERS <20W	1M	5%	0,5W
4822 117 10118	0430	RESISTOR, FIXED, OTHERS <20W	1M	5%	0,5W
4822 050 23302	0450	RESISTOR, FIXED, OTHERS <20W	3K30	1%	0,6W
4822 050 21502	0470	RESISTOR, FIXED, OTHERS <20W	1K50	1%	0,6W
4822 050 13903	0490	RESISTOR, FIXED, OTHERS <20W	39K00	1%	0,4W
4822 051 20223	0510	RESISTOR, FIXED, OTHERS <20W	22K00	5%	0,1W
4822 050 24701	0530	RESISTOR, FIXED, OTHERS <20W	470R00	1%	0,6W
4822 117 10837	0550	RESISTOR, FIXED, OTHERS <20W	100K	1%	0,1W
4822 050 23902	0570	RESISTOR, FIXED, OTHERS <20W	3K90	1%	0,6W
4822 117 10118	0590	RESISTOR, FIXED, OTHERS <20W	1M	5%	0,5W
4822 111 50617	0610	RESISTOR, FIXED, CARBON	2K2	10%	0,5W
4822 117 10837	0630	RESISTOR, FIXED, OTHERS <20W	100K	1%	0,1W
4822 050 21003	0650	RESISTOR, FIXED, OTHERS <20W	10K00	1%	0,6W
4822 117 10837	0670	RESISTOR, FIXED, OTHERS <20W	100K	1%	0,1W
4822 050 21003	0690	RESISTOR, FIXED, OTHERS <20W	10K00	1%	0,6W
4822 117 10837	0710	RESISTOR, FIXED, OTHERS <20W	100K	1%	0,1W
4822 050 21003	0730	RESISTOR, FIXED, OTHERS <20W	10K00	1%	0,6W
4822 117 10837	0750	RESISTOR, FIXED, OTHERS <20W	100K	1%	0,1W
4822 050 21003	0770	RESISTOR, FIXED, OTHERS <20W	10K00	1%	0,6W
4822 117 10837	0790	RESISTOR, FIXED, OTHERS <20W	100K	1%	0,1W
4822 050 21003	0810	RESISTOR, FIXED, OTHERS <20W	10K00	1%	0,6W
4822 050 22202	0830	RESISTOR, FIXED, OTHERS <20W	2K20	1%	0,6W
4822 051 20472	0850	RESISTOR, FIXED, OTHERS <20W	4K70	5%	0,1W
4822 116 52179	0870	RESISTOR, FIXED, OTHERS <20W	12E	5%	0,5W
4822 051 20154	0890	RESISTOR, FIXED, OTHERS <20W	150K00	5%	0,1W
4822 051 20472	0910	RESISTOR, FIXED, OTHERS <20W	4K70	5%	0,1W
4822 051 20472	0930	RESISTOR, FIXED, OTHERS <20W	4K70	5%	0,1W
4822 050 13302	0950	RESISTOR, FIXED, OTHERS <20W	3K30	1%	0,4W
4822 050 25602	0970	RESISTOR, FIXED, OTHERS <20W	5K60	1%	0,6W
4822 051 20562	0990	RESISTOR, FIXED, OTHERS <20W	5K6	5%	0,1W 0805
4822 051 20479	1010	RESISTOR, FIXED, OTHERS <20W	47R00	5%	0,1W
4822 051 20472	1030	RESISTOR, FIXED, OTHERS <20W	4K70	5%	0,1W
4822 117 11145	1050	RESISTOR, FIXED, OTHERS <20W	4K70	1%	0,1W
4822 051 20332	1070	RESISTOR, FIXED, OTHERS <20W	3K30	5%	0,1W
4822 117 10833	1090	RESISTOR, FIXED, OTHERS <20W	10K	1%	0,1W
4822 051 20105	1110	RESISTOR, FIXED, OTHERS <20W	1M00	5%	0,1W
4822 051 20472	1130	RESISTOR, FIXED, OTHERS <20W	4K70	5%	0,1W
4822 051 20223	1150	RESISTOR, FIXED, OTHERS <20W	22K00	5%	0,1W
4822 050 21005	1170	RESISTOR, FIXED, OTHERS <20W	1M00	1%	0,6W
4822 052 10478	1190	RESISTOR, FIXED, OTHERS <20W	4R70	5%	0,33W
4822 051 20125	1210	RESISTOR, FIXED, OTHERS <20W	1M20	5%	0,1W
4822 050 21002	1230	RESISTOR, FIXED, OTHERS <20W	1K00	1%	0,6W
4822 117 10442	1250	RESISTOR, FIXED, OTHERS <20W	10R	5%	
4822 050 21003	1270	RESISTOR, FIXED, OTHERS <20W	10K00	1%	0,6W
2120 105 92444	1290	RESISTOR, FIXED, OTHERS <20W	RST MOX	2W	RSS S 68R PM5 B
4822 050 21001	1310	RESISTOR, FIXED, OTHERS <20W	100R00	1%	0,6W
4822 050 24701	1330	RESISTOR, FIXED, OTHERS <20W	470R00	1%	0,6W

4822 050 11003	1350	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,4W
4822 117 10442	1370	RESISTOR, FIXED, OTHERS <20W	10R 5%
4822 053 21104	1390	RESISTOR, FIXED, OTHERS <20W	100K00 5% 0,5W
4822 117 11635	1410	RESISTOR, FIXED, OTHERS <20W	1K 10% 0,5W ERC12G AXIAL
4822 050 24702	1430	RESISTOR, FIXED, OTHERS <20W	4K70 1% 0,6W
4822 050 21004	1450	RESISTOR, FIXED, OTHERS <20W	100K00 1% 0,6W
4822 117 12955	1470	RESISTOR, FIXED, OTHERS <20W	2K7 1% 0,1W 0805
4822 117 10833	1490	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 117 10834	1510	RESISTOR, FIXED, OTHERS <20W	47K 1% 0,1W
4822 050 21503	1530	RESISTOR, FIXED, OTHERS <20W	15K00 1% 0,6W
4822 050 21002	1550	RESISTOR, FIXED, OTHERS <20W	1K00 1% 0,6W
4822 050 21502	1570	RESISTOR, FIXED, OTHERS <20W	1K50 1% 0,6W
4822 701 20292	1590	SCREW, STEEL	
4822 053 21684	1590	RESISTOR, FIXED, OTHERS <20W	680K00 5% 0,5W
4822 050 21004	1610	RESISTOR, FIXED, OTHERS <20W	100K00 1% 0,6W
4822 050 27503	1630	RESISTOR, FIXED, OTHERS <20W	75K00 1% 0,6W
2138 365 00102	1650	RESISTOR, VARIAB., OTHERS <20W	RTRM CER LIN 20K H VG067TL1 B
4822 050 21005	1670	RESISTOR, FIXED, OTHERS <20W	1M00 1% 0,6W
4822 050 27503	1690	RESISTOR, FIXED, OTHERS <20W	75K00 1% 0,6W
2138 365 00102	1710	RESISTOR, VARIAB., OTHERS <20W	RTRM CER LIN 20K H VG067TL1 B
4822 051 20102	1730	RESISTOR, FIXED, OTHERS <20W	1K00 5% 0,1W
3138 168 73610	1750	FILTER, MAINS	LINE FILTER (HJC-K8259)
3138 168 74510	1770	BEAD, FERRITE	FERRITE BEAD
3138 168 74510	1790	BEAD, FERRITE	FERRITE BEAD
4822 526 10522	1810	BEAD, FERRITE	
3138 168 74280	1830	TRANSFORMER	POWER TRAN.
4822 152 20596	1850	COIL	
4822 152 20596	1870	COIL	
3138 168 73820	1890	FILTER, L/C	AC INLET ASSY EMI FILTER
4822 142 40349	1890	TRANSFORMER	
4822 276 13476	1910	SWITCH, PUSH BUTTON	
3138 168 74060	1910	BEAD, FERRITE	BEAD BF30UTA-3.5X5X1B
4822 070 34002	1930	FUSE	218004.(4A)
3138 168 73550	1930	COIL	LINEARITY COIL(54A-9050H)
4822 280 70378	1950	RELAY	
3138 168 73540	1950	COIL	LINEARITY COIL(54A-9049H)
4822 265 30891	1970	CONNECTOR, ELECTRICAL OTHERS	2 P.
3138 168 74060	1970	BEAD, FERRITE	BEAD BF30UTA-3.5X5X1B
2422 535 91023	1990	COIL	IND FIX NSL0808 S 22U PM10 A
4822 146 10737	2010	TRANSFORMER	HOR.CENTERING TRANSF.
4822 157 71419	2030	TRANSFORMER	
4822 157 11201	2050	COIL	PUNK HEAD CHOKE
4822 146 10738	2070	TRANSFORMER	DAF TRANSFORMER
4822 152 20596	2090	COIL	
3138 168 76540	2110	TRANSFORMER, LINE OUTPUT	CF1653PH2350
2422 535 91023	2130	COIL	IND FIX NSL0808 S 22U PM10 A
4822 130 60815	2150	DIODE, POWER RECTIFIER	BYV26E
4822 130 30861	2170	DIODE, REFERENCE	BZX79-B7V5
4822 130 34281	2190	DIODE, REFERENCE	BZX79-B15
4822 130 60815	2210	DIODE, POWER RECTIFIER	BYV26E
4822 130 30842	2230	DIODE	BAV21
4822 130 80877	2250	DIODE	BAV103
4822 130 30842	2270	DIODE	BAV21
4822 130 31607	2290	DIODE, POWER RECTIFIER	RGP10D
4822 130 30621	2310	DIODE	1N4148
4822 130 10746	2330	DIODE, POWER RECTIFIER	31DF6
4822 130 34281	2350	DIODE, REFERENCE	BZX79-B15
4822 130 10746	2370	DIODE, POWER RECTIFIER	31DF6
4822 130 83539	2390	DIODE, POWER RECTIFIER	EGP20G
4822 130 60815	2410	DIODE, POWER RECTIFIER	BYV26E
4822 130 30842	2430	DIODE	BAV21
4822 130 34278	2450	DIODE, REFERENCE	BZX79-B6V8
4822 130 80446	2470	DIODE	BAS32L

4822 130 30842	2490	DIODE	BAV21
4822 130 80877	2510	DIODE	BAV103
4822 130 80446	2530	DIODE	BAS32L
4822 130 80446	2550	DIODE	BAS32L
5322 130 34337	2570	DIODE	BAV99
5322 130 34337	2590	DIODE	BAV99
5322 130 34337	2610	DIODE	BAV99
5322 130 34337	2630	DIODE	BAV99
4822 130 30621	2650	DIODE	1N4148
9339 577 60683	2670	DIODE	SB140
4822 130 80446	2690	DIODE	BAS32L
4822 130 30621	2710	DIODE	1N4148
4822 130 30621	2730	DIODE	1N4148
4822 130 34328	2750	DIODE, REFERENCE	BZX79-B30
4822 130 80446	2770	DIODE	BAS32L
4822 130 34233	2790	DIODE, REFERENCE	BZX79-B5V1
4822 130 30621	2810	DIODE	1N4148
4822 130 30621	2830	DIODE	1N4148
4822 130 42489	2850	DIODE, POWER RECTIFIER	BYD33G
4822 130 31607	2870	DIODE, POWER RECTIFIER	RGP10D
4822 130 30621	2890	DIODE	1N4148
5322 130 32184	2910	DIODE, POWER RECTIFIER	BYV27-50
4822 130 34281	2930	DIODE, REFERENCE	BZX79-B15
4822 130 60815	2950	DIODE, POWER RECTIFIER	BYV26E
4822 130 60815	2970	DIODE, POWER RECTIFIER	BYV26E
4822 130 60815	2990	DIODE, POWER RECTIFIER	BYV26E
4822 130 31393	3010	DIODE	BYT52J
4822 130 30621	3030	DIODE	1N4148
4822 130 30621	3050	DIODE	1N4148
4822 130 11113	3070	DIODE, POWER RECTIFIER	31DF4-FC5
4822 130 31607	3090	DIODE, POWER RECTIFIER	RGP10D
4822 130 31607	3110	DIODE, POWER RECTIFIER	RGP10D
4822 130 30621	3130	DIODE	1N4148
5322 130 31969	3150	DIODE, POWER RECTIFIER	RGP15M
4822 130 34197	3170	DIODE, REFERENCE	BZX79-B12
4822 130 30621	3190	DIODE	1N4148
4822 130 34233	3210	DIODE, REFERENCE	BZX79-B5V1
4822 130 31607	3230	DIODE, POWER RECTIFIER	RGP10D
4822 130 34233	3250	DIODE, REFERENCE	BZX79-B5V1
4822 130 80446	3270	DIODE	BAS32L
4822 130 80446	3290	DIODE	BAS32L
4822 130 34233	3310	DIODE, REFERENCE	BZX79-B5V1
4822 130 31393	3330	DIODE	BYT52J
4822 130 30621	3350	DIODE	1N4148
5322 130 32274	3370	DIODE	BY584
4822 130 34685	3390	DIODE, REFERENCE	BZX79-B75
4822 130 41782	3410	TRANSISTOR, <1W	BF422
8238 274 02070	3430	COUPLER, OPTO/PHOTO	TCET1103G
4822 130 40995	3450	TRANSISTOR, >=1W	BD438
4822 130 10829	3470	TRANSISTOR, <1W	MUN2211J
4822 209 13061	3490	IC ANA VOLT./CURR. REGULATOR	L4940V5
9337 739 70687	3510	TRANSISTOR, FET <1W	IRF640
4822 130 63081	3530	TRANSISTOR, FET <1W	BSN254A
4822 130 10829	3550	TRANSISTOR, <1W	MUN2211J
5322 130 42755	3570	TRANSISTOR, <1W	BC847C
4822 130 41344	3590	TRANSISTOR, <1W	BC337-40
4822 209 81397	3610	IC ANA VOLT./CURR. REGULATOR	TL431CLPST
4822 130 40855	3630	TRANSISTOR, <1W	BC337
3138 178 51070	3650	IC DIG MOS EEPROM	EEPROM IC ASSY(7336-M24C16)
4822 130 10829	3650	TRANSISTOR, <1W	MUN2211J
5322 130 42755	3670	TRANSISTOR, <1W	BC847C
4822 130 42513	3690	TRANSISTOR, <1W	BC858C
5322 130 42755	3710	TRANSISTOR, <1W	BC847C



2438 543 00064	3730	CRYSTAL	12MHZ 32P HC49/S B
4822 130 10829	3730	TRANSISTOR, <1W	MUN2211J
4822 265 41422	3750	CONNECTOR, ELECTRICAL OTHERS	6P
4822 130 42513	3750	TRANSISTOR, <1W	BC858C
4822 130 44104	3770	TRANSISTOR, <1W	BC328
4822 265 31231	3790	CONNECTOR, ELECTRICAL OTHERS	3 P MALE
4822 130 10829	3790	TRANSISTOR, <1W	MUN2211J
4822 121 70446	3810	CAPACITOR, FILM	220NF20% 250V
5322 209 10576	3810	IC DIG MOS STANDARD LOGIC	HEF4053BD
4822 124 42168	3830	CAPACITOR, ELECTROLYTIC ALU.	330UF 400V
4822 209 16972	3830	IC ANA OTHERS	TDA4856
8238 274 37250	3850	CAPACITOR, FILM	33NF 400V
4822 130 40855	3850	TRANSISTOR, <1W	BC337
4822 124 12342	3870	CAPACITOR, ELECTROLYTIC ALU.	100UF 35V 20%
4822 130 44104	3870	TRANSISTOR, <1W	BC328
4822 124 12336	3890	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 250V
4822 130 10829	3890	TRANSISTOR, <1W	MUN2211J
2020 558 90542	3910	CAPACITOR, CERAMIC WITH WIRES	CER2 DC B 1KV S 100P PM10 A
4822 130 44503	3910	TRANSISTOR, <1W	BC547C
4822 124 11965	3930	CAPACITOR, ELECTROLYTIC ALU.	47UF 20% 25V
4822 130 42231	3930	TRANSISTOR, <1W	BC557C
2020 558 90555	3950	CAPACITOR, FIXED OTHERS	CERAMIC1KV,470PF10%,
4822 130 42513	3950	TRANSISTOR, <1W	BC858C
2252 712 14026	3970	CAPACITOR, CERAMIC SMD	CERHDT 712 2KV S 1N PM10 A
4822 130 44461	3970	TRANSISTOR, <1W	BC546B
5322 122 34098	3990	CAPACITOR, CERAMIC SMD	10NF10%X7R 63V
4822 130 44503	3990	TRANSISTOR, <1W	BC547C
4822 122 33968	4010	CAPACITOR, CERAMIC WITH WIRES	1NF 5% 500V
4822 130 42231	4010	TRANSISTOR, <1W	BC557C
5322 122 32654	4030	CAPACITOR, CERAMIC SMD	CER2 0805 X7R 63V 22N PM10 R
4822 130 41646	4030	TRANSISTOR, <1W	BF423
4822 121 40336	4050	CAPACITOR, FILM	47NF 10% 250V
4822 130 41782	4050	TRANSISTOR, <1W	BF422
4822 126 14084	4070	CAPACITOR, CERAMIC WITH WIRES	4,7NF 20% 250V
4822 130 10829	4070	TRANSISTOR, <1W	MUN2211J
4822 126 14088	4090	CAPACITOR, CERAMIC WITH WIRES	2,2NF 20% 250V
4822 209 15121	4090	IC DIG MOS EEPROM	ST24LC21B1
4822 126 14504	4110	CAPACITOR, CERAMIC WITH WIRES	3,3NF 20% 250V
4822 130 63527	4110	TRANSISTOR, FET >=1W	BSP126
4822 124 11941	4130	CAPACITOR, ELECTROLYTIC ALU.	100UF 20% 250V
5322 130 42631	4130	TRANSISTOR, >=1W	BD243
4822 124 12034	4150	CAPACITOR, ELECTROLYTIC ALU.	220UF 20% 100V
4822 130 63427	4150	TRANSISTOR, >=1W	BD534FI
4822 124 11942	4170	CAPACITOR, ELECTROLYTIC ALU.	2200UF 20% 25V
9333 935 10602	4170	IC ANA OTHERS	LM358N
4822 124 11943	4190	CAPACITOR, ELECTROLYTIC ALU.	1000UF 20% 25V
4822 130 63274	4190	TRANSISTOR, >=1W	2SC2344E
4822 124 11943	4210	CAPACITOR, ELECTROLYTIC ALU.	1000UF 20% 25V
4822 130 63275	4210	TRANSISTOR, >=1W	2SA1011E
4822 124 81285	4230	CAPACITOR, ELECTROLYTIC ALU.	2200UF20% 16V
4822 130 42513	4230	TRANSISTOR, <1W	BC858C
2038 017 00325	4250	CAPACITOR, ELECTROLYTIC ALU.	ELCAP VZ 10V S 4700U PM20 B
4822 130 41782	4250	TRANSISTOR, <1W	BF422
2038 017 00325	4270	CAPACITOR, ELECTROLYTIC ALU.	ELCAP VZ 10V S 4700U PM20 B
4822 130 10829	4270	TRANSISTOR, <1W	MUN2211J
4822 124 42162	4290	CAPACITOR, ELECTROLYTIC ALU.	1UF 160V
9333 935 10602	4290	IC ANA OTHERS	LM358N
2020 558 90542	4310	CAPACITOR, CERAMIC WITH WIRES	CER2 DC B 1KV S 100P PM10 A
4822 130 41053	4310	TRANSISTOR, <1W	BC639
4822 124 40769	4330	CAPACITOR, ELECTROLYTIC ALU.	4,7UF20% 100V
4822 130 41087	4330	TRANSISTOR, <1W	BC638
4822 130 70025	4350	TRANSISTOR, >=1W	BUX87P
5322 122 32268	4370	CAPACITOR, CERAMIC SMD	CER1 0805 NP0 63V 470P PM5

5322 130 42755	4370	TRANSISTOR, <1W	BC847C
4822 126 14504	4390	CAPACITOR, CERAMIC WITH WIRES	3,3NF 20% 250V
5322 130 42755	4390	TRANSISTOR, <1W	BC847C
4822 126 14585	4410	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 130 10829	4410	TRANSISTOR, <1W	MUN2211J
4822 126 14585	4430	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 130 10829	4430	TRANSISTOR, <1W	MUN2211J
5322 122 31647	4450	CAPACITOR, CERAMIC SMD	1NF10%X7R 63V
4822 130 10829	4450	TRANSISTOR, <1W	MUN2211J
4822 121 43696	4470	CAPACITOR, FILM	100NF 100V
4822 130 10829	4470	TRANSISTOR, <1W	MUN2211J
4822 122 33127	4490	CAPACITOR, CERAMIC SMD	2,2NF10%X7R 63V
4822 130 10829	4490	TRANSISTOR, <1W	MUN2211J
5322 122 32659	4510	CAPACITOR, CERAMIC SMD	33PF 5% 50V
4822 209 16244	4510	IC ANA OTHERS	L4990A
5322 122 32659	4530	CAPACITOR, CERAMIC SMD	33PF 5% 50V
4822 130 44503	4530	TRANSISTOR, <1W	BC547C
2038 035 50227	4550	CAPACITOR, ELECTROLYTIC ALU.	ELCAP SS 10V S 220U PM20 A
4822 130 42513	4550	TRANSISTOR, <1W	BC858C
4822 121 70106	4570	CAPACITOR, FILM	100NF 5% 100V
5322 130 42755	4570	TRANSISTOR, <1W	BC847C
5322 122 32658	4590	CAPACITOR, CERAMIC SMD	22PF 5% 50V
4822 130 63081	4590	TRANSISTOR, FET <1W	BSN254A
5322 122 32658	4610	CAPACITOR, CERAMIC SMD	22PF 5% 50V
4822 130 44503	4610	TRANSISTOR, <1W	BC547C
5322 122 31647	4630	CAPACITOR, CERAMIC SMD	1NF10%X7R 63V
2038 035 50227	4650	CAPACITOR, ELECTROLYTIC ALU.	ELCAP SS 10V S 220U PM20 A
4822 124 23539	4670	CAPACITOR, ELECTROLYTIC ALU.	10UF20% 50V
4822 122 33127	4690	CAPACITOR, CERAMIC SMD	2,2NF10%X7R 63V
4822 126 14585	4710	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
5322 122 32658	4730	CAPACITOR, CERAMIC SMD	22PF 5% 50V
5322 122 32658	4750	CAPACITOR, CERAMIC SMD	22PF 5% 50V
4822 124 81131	4770	CAPACITOR, ELECTROLYTIC ALU.	330UF20% 16V
4822 124 41643	4790	CAPACITOR, ELECTROLYTIC ALU.	100UF 20% 16V DIM:6,3X11MM
4822 126 14585	4810	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
5322 122 32531	4830	CAPACITOR, CERAMIC SMD	100PF 5%NP0 50V
4822 121 43696	4850	CAPACITOR, FILM	100NF 100V
4822 121 43696	4870	CAPACITOR, FILM	100NF 100V
5322 121 42925	4890	CAPACITOR, FILM	150NF10% 100V
4822 126 14106	4910	CAPACITOR, CERAMIC WITH WIRES	220PF 5% 50V
4822 126 14585	4930	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
2038 034 53102	4950	CAPACITOR, ELECTROLYTIC ALU.	ELCAP VX 16V S 1000U PM20 A
5322 122 32143	4970	CAPACITOR, CERAMIC WITH WIRES	22PF 100V
4822 121 70106	4990	CAPACITOR, FILM	100NF 5% 100V
4822 121 10755	5010	CAPACITOR, FILM	8,2NF 5% 100V
4822 121 70162	5030	CAPACITOR, FILM	10NF5% 400V
4822 051 20008	5030	RESISTOR, FIXED, OTHERS <20W	0R00 JUMP. (0805)
4822 121 10576	5050	CAPACITOR, FILM	5,6NF 2% 100V
4822 121 10695	5070	CAPACITOR, FILM	6.8NF 5% 100V
4822 121 70631	5090	CAPACITOR, FILM	3.3NF 2,5% 100V
5322 122 32268	5110	CAPACITOR, CERAMIC SMD	CER1 0805 NP0 63V 470P PM5
4822 124 22681	5170	CAPACITOR, ELECTROLYTIC ALU.	47UF20% 16V
4822 121 43913	5190	CAPACITOR, FILM	470NF10% 100V
4822 124 22681	5210	CAPACITOR, ELECTROLYTIC ALU.	47UF20% 16V
4822 121 70411	5230	CAPACITOR, FILM	220NF 5% 250V
4822 122 33575	5250	CAPACITOR, CERAMIC SMD	220PF 5% NP0 63V CASE 0805
4822 124 22681	5270	CAPACITOR, ELECTROLYTIC ALU.	47UF20% 16V
4822 121 43696	5290	CAPACITOR, FILM	100NF 100V
5322 122 32531	5310	CAPACITOR, CERAMIC SMD	100PF 5%NP0 50V
5322 122 32531	5330	CAPACITOR, CERAMIC SMD	100PF 5%NP0 50V
4822 124 42162	5350	CAPACITOR, ELECTROLYTIC ALU.	1UF 160V
4822 051 20008	5350	RESISTOR, FIXED, OTHERS <20W	0R00 JUMP. (0805)
4822 124 80606	5370	CAPACITOR, ELECTROLYTIC ALU.	1UF20% 160V

4822 121 43696	5390	CAPACITOR, FILM	100NF	100V
2020 558 90561	5410	CAPACITOR, CERAMIC SMD	CERHDT RR	2KV S 220P PM10 A
2020 558 90561	5430	CAPACITOR, CERAMIC SMD	CERHDT RR	2KV S 220P PM10 A
2038 301 00404	5450	CAPACITOR, FILM	CAP PP PPNS	2KV S 4N7 PM5 B
4822 122 33968	5470	CAPACITOR, CERAMIC WITH WIRES	1NF 5%	500V
4822 121 43913	5490	CAPACITOR, FILM	470NF10%	100V
4822 121 43696	5510	CAPACITOR, FILM	100NF	100V
4822 121 43696	5530	CAPACITOR, FILM	100NF	100V
4822 121 43696	5550	CAPACITOR, FILM	100NF	100V
2038 302 00155	5570	CAP MPOL	250V S	100N PM10 B
4822 124 80834	5590	CAPACITOR, ELECTROLYTIC ALU.	100UF20%	250V
2020 558 90561	5610	CAPACITOR, CERAMIC SMD	CERHDT RR	2KV S 220P PM10 A
4822 126 14585	5630	CAPACITOR, CERAMIC SMD	100NF 10%	X7R 0805 50V
4822 126 14585	5650	CAPACITOR, CERAMIC SMD	100NF 10%	X7R 0805 50V
4822 124 40433	5670	CAPACITOR, ELECTROLYTIC ALU.	47UF20%	25V
4822 124 40433	5690	CAPACITOR, ELECTROLYTIC ALU.	47UF20%	25V
4822 121 10783	5710	CAPACITOR, FILM	150NF 5%	250V
4822 121 10783	5730	CAPACITOR, FILM	150NF 5%	250V
4822 124 40248	5750	CAPACITOR, ELECTROLYTIC ALU.	10UF20%	63V
2038 031 42471	5770	ELCAP VT	25V S	470U PM20 B
4822 124 20715	5790	CAPACITOR, ELECTROLYTIC ALU.	100UF 50%	40V
4822 126 14106	5810	CAPACITOR, CERAMIC WITH WIRES	220PF 5%	50V
4822 121 43694	5830	CAPACITOR, FILM	22NF	100V
2038 031 42471	5850	ELCAP VT	25V S	470U PM20 B
4822 121 43696	5870	CAPACITOR, FILM	100NF	100V
4822 121 43913	5890	CAPACITOR, FILM	470NF10%	100V
4822 121 70106	5910	CAPACITOR, FILM	100NF 5%	100V
4822 121 43696	5930	CAPACITOR, FILM	100NF	100V
4822 121 43696	5950	CAPACITOR, FILM	100NF	100V
4822 121 43696	5970	CAPACITOR, FILM	100NF	100V
2252 712 14266	5990	CAPACITOR, CERAMIC WITH WIRES	CERHDT 712	2KV S 270P PM10 A
2020 558 90557	6010	CAPACITOR, CERAMIC WITH WIRES	CERAMIC1KV,	1000PF.,10%,
4822 126 12651	6030	CAPACITOR, CERAMIC WITH WIRES	10NF20%	2K
4822 124 80132	6050	CAPACITOR, ELECTROLYTIC ALU.	47UF20%	25V
4822 126 14585	6070	CAPACITOR, CERAMIC SMD	100NF 10%	X7R 0805 50V
4822 124 41069	6090	CAPACITOR, ELECTROLYTIC ALU.	47UF20%	63V
2038 301 00194	6110	CAP PP PPN	250V S	100N PM5 B
2038 301 00224	6130	CAP MPP MPS	250V S	220N PM5 B
2038 301 00303	6150	CAP MPP MPS	250V S	470N PM5 B
4822 121 10857	6170	CAPACITOR, FILM	820NF 5%	250V
2038 301 00217	6190	CAP MPP MPS	250V S	1U5 PM5 B
4822 124 22669	6210	CAPACITOR, ELECTROLYTIC ALU.	1UF20%	50V
5322 122 31865	6230	CAPACITOR, CERAMIC SMD	CER2 0805 X7R	63V 1N5 PM10 R
5322 122 33446	6250	CAPACITOR, CERAMIC SMD	3,3NF 10%	X7R 50V CASE 1203
4822 051 20008	6250	RESISTOR, FIXED, OTHERS <20W	0R00 JUMP.	(0805)
4822 126 13606	6270	CAPACITOR, FILM	10N 2%	100V
4822 124 80144	6290	CAPACITOR, ELECTROLYTIC ALU.	220UF20%	25V
2238 580 16615	6310	CER2 0805 X7R	50V 1N2 PM10 R	
2222 780 19867	6330	CAPACITOR, CERAMIC SMD	CER2 0805 Y5V	16V 2U2 P802D R
4822 124 80132	6350	CAPACITOR, ELECTROLYTIC ALU.	47UF20%	25V
4822 126 14325	6370	CAPACITOR, CERAMIC SMD	1UF 80/20%	16V 0805
2222 780 19867	6390	CAPACITOR, CERAMIC SMD	CER2 0805 Y5V	16V 2U2 P802D R
4822 051 20008	6390	RESISTOR, FIXED, OTHERS <20W	0R00 JUMP.	(0805)
4822 124 42161	6410	CAPACITOR, ELECTROLYTIC ALU.	33UF20%	250V
4822 126 14585	6430	CAPACITOR, CERAMIC SMD	100NF 10%	X7R 0805 50V
2020 558 90562	6450	CAPACITOR, CERAMIC SMD	CERHDT RR	2KV S 330P PM10 A
4822 122 33127	6470	CAPACITOR, CERAMIC SMD	2,2NF10%X7R	63V
4822 124 11941	6490	CAPACITOR, ELECTROLYTIC ALU.	100UF 20%	250V
4822 121 10654	6510	CAPACITOR, FILM	4,7NF 5%	630V
4822 121 40336	6530	CAPACITOR, FILM	47NF 10%	250V
4822 124 22681	6550	CAPACITOR, ELECTROLYTIC ALU.	47UF20%	16V
2020 558 90594	6570	CAPACITOR, CERAMIC WITH WIRES	CERHD B RB	1KV S 1N PM10 A
4822 121 40336	6590	CAPACITOR, FILM	47NF 10%	250V

4822 121 70659	6610	CAPACITOR, FILM	1,8UF 5% 100V
4822 121 43694	6630	CAPACITOR, FILM	22NF 100V
4822 116 30469	6650	RESISTOR, FIXED, OTHERS <20W	5R 15%
2138 105 00337	6670	RESISTOR, FIXED, OTHERS <20W	RST MOX 1W RSS A 100K PM5 A
2138 105 00337	6690	RESISTOR, FIXED, OTHERS <20W	RST MOX 1W RSS A 100K PM5 A
2120 105 92436	6710	RESISTOR, FIXED, OTHERS <20W	RST MOX 3W RSS S 47K PM5 B
4822 050 22204	6730	RESISTOR, FIXED, OTHERS <20W	220K00 1% 0,6W
4822 050 22704	6750	RESISTOR, FIXED, OTHERS <20W	270K00 1% 0,6W
4822 116 52257	6770	RESISTOR, FIXED, OTHERS <20W	22K 5% 0,5W
2138 105 00332	6790	RESISTOR, FIXED, OTHERS <20W	RST MOX5W RSM5WS S 22K PM5 B
4822 050 24703	6810	RESISTOR, FIXED, OTHERS <20W	47K00 1% 0,6W
2138 116 13302	6830	RESISTOR, FIXED, OTHERS <20W	RST MFLM MFR-5S A 3K3 PM1 A
4822 050 21002	6850	RESISTOR, FIXED, OTHERS <20W	1K00 1% 0,6W
2138 105 00338	6870	RESISTOR, FIXED, OTHERS <20W	RST MPLT 5W MPR S 0R12 PM10 B
4822 117 10833	6890	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 050 25602	6910	RESISTOR, FIXED, OTHERS <20W	5K60 1% 0,6W
4822 116 40144	6930	RESISTOR, FIXED, OTHERS <20W	12R
4822 116 21237	6950	RESISTOR, NON-LINEAR	1MA/100V
4822 051 20102	6970	RESISTOR, FIXED, OTHERS <20W	1K00 5% 0,1W
4822 050 23301	6990	RESISTOR, FIXED, OTHERS <20W	330R00 1% 0,6W
2120 105 92383	7010	RESISTOR, FIXED, OTHERS <20W	2R2 5% 2W
4822 051 20008	7030	RESISTOR, FIXED, OTHERS <20W	0R00 JUMP. (0805)
4822 051 20105	7050	RESISTOR, FIXED, OTHERS <20W	1M00 5% 0,1W
2120 105 92169	7070	RESISTOR, FIXED, OTHERS <20W	12K 5% 2W
4822 050 21003	7090	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,6W
2122 662 00119	7110	RESISTOR, NON-LINEAR	PTC DC 0A65 60V S 0R31 A
4822 117 11507	7130	RESISTOR, FIXED, OTHERS <20W	6K8 1% 0,1W
4822 051 20102	7150	RESISTOR, FIXED, OTHERS <20W	1K00 5% 0,1W
4822 050 21002	7170	RESISTOR, FIXED, OTHERS <20W	1K00 1% 0,6W
4822 051 20101	7190	RESISTOR, FIXED, OTHERS <20W	100R00 5% 0,1W
4822 050 23304	7210	RESISTOR, FIXED, OTHERS <20W	330K00 1% 0,6W
4822 051 20105	7230	RESISTOR, FIXED, OTHERS <20W	1M00 5% 0,1W
4822 051 20472	7250	RESISTOR, FIXED, OTHERS <20W	4K70 5% 0,1W
4822 101 11825	7270	RESISTOR, VARIAB., OTHERS <20W	1K 20% 300MW
4822 050 24709	7290	RESISTOR, FIXED, OTHERS <20W	47R00 1% 0,6W
4822 050 22203	7310	RESISTOR, FIXED, OTHERS <20W	22K00 1% 0,6W
4822 050 21003	7330	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,6W
4822 050 22709	7350	RESISTOR, FIXED, OTHERS <20W	27R00 1% 0,6W
4822 050 21004	7370	RESISTOR, FIXED, OTHERS <20W	100K00 1% 0,6W
2138 112 03008	7390	RST NETW RNL 8X 10K PM5 B	8X10K 5% 0,8W
4822 051 20101	7410	RESISTOR, FIXED, OTHERS <20W	100R00 5% 0,1W
4822 117 10833	7430	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 050 21001	7450	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 116 52234	7470	RESISTOR, FIXED, OTHERS <20W	100K 5% 0,5W
4822 050 21001	7490	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 117 10833	7510	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 117 10833	7530	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 050 21003	7550	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,6W
4822 051 20472	7570	RESISTOR, FIXED, OTHERS <20W	4K70 5% 0,1W
4822 116 52234	7590	RESISTOR, FIXED, OTHERS <20W	100K 5% 0,5W
4822 050 21001	7610	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 050 21001	7630	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 050 21001	7650	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 050 21001	7670	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 051 20472	7690	RESISTOR, FIXED, OTHERS <20W	4K70 5% 0,1W
4822 050 13303	7710	RESISTOR, FIXED, OTHERS <20W	33K00 1% 0,4W
4822 117 10833	7730	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 050 21003	7750	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,6W
4822 050 21003	7770	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,6W
4822 116 52303	7790	RESISTOR, FIXED, OTHERS <20W	8K2 5% 0,5W
4822 050 21001	7810	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 051 20472	7830	RESISTOR, FIXED, OTHERS <20W	4K70 5% 0,1W
4822 050 24702	7850	RESISTOR, FIXED, OTHERS <20W	4K70 1% 0,6W

4822 050 21503 7870  
4822 050 22701 7890  
4822 117 12701 7910  
4822 050 21503 7930  
4822 050 24702 7950  
4822 117 10833 7970  
4822 117 10833 7990  
4822 050 21001 8010  
4822 050 21001 8030  
4822 051 20008 8050  
4822 116 52256 8070  
4822 116 52256 8090  
4822 117 10833 8110  
4822 117 10833 8130  
4822 117 10833 8150  
4822 117 10833 8170  
4822 051 20472 8190  
4822 117 10833 8210  
4822 051 20472 8230  
4822 117 10833 8250  
4822 050 24702 8270  
4822 050 21001 8290  
4822 117 10833 8310  
4822 117 11449 8330  
4822 051 20008 8350  
4822 050 24701 8370  
4822 116 52257 8390  
4822 050 24701 8410  
4822 051 20472 8430  
4822 050 21001 8450  
4822 117 10833 8470  
4822 050 21001 8490  
4822 050 21001 8510  
4822 050 22205 8530  
4822 051 20155 8550  
4822 051 20101 8570  
4822 051 20332 8590  
4822 050 25101 8610  
4822 117 13449 8630  
4822 051 20472 8650  
4822 050 23904 8670  
4822 050 22204 8690  
4822 050 26803 8710  
4822 051 20008 8730  
4822 051 20124 8750  
4822 117 11383 8770  
4822 052 10828 8790  
4822 051 20122 8810  
4822 052 10828 8830  
4822 051 20122 8850  
4822 050 24701 8870  
4822 050 21003 8890  
4822 116 83933 8910  
4822 050 21003 8930  
4822 050 21003 8950  
4822 051 20472 8970  
4822 050 24702 8990  
4822 050 24703 9010  
4822 050 22201 9030  
4822 050 24703 9050  
4822 050 27503 9070  
4822 050 21003 9090  
4822 050 21504 9110

RESISTOR, FIXED, OTHERS <20W 15K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 270R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 15R 1% 0,5W  
RESISTOR, FIXED, OTHERS <20W 15K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 4K70 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 100R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 100R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 0R00 JUMP. (0805)  
RESISTOR, FIXED, OTHERS <20W 2K2 5% 0,5W  
RESISTOR, FIXED, OTHERS <20W 2K2 5% 0,5W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 4K70 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 4K70 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 4K70 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 100R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, CARBON 2K2 5% 0,1W 0805  
RESISTOR, FIXED, OTHERS <20W 0R00 JUMP. (0805)  
RESISTOR, FIXED, OTHERS <20W 470R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 22K 5% 0,5W  
RESISTOR, FIXED, OTHERS <20W 470R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 4K70 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 100R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 10K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 100R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 100R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 2M20 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 1M50 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 100R00 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 3K30 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 510R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 2K8 1% 0,5W  
RESISTOR, FIXED, OTHERS <20W 4K70 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 390K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 220K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 68K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 0R00 JUMP. (0805)  
RESISTOR, FIXED, OTHERS <20W 120K00 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 12K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 8R20 5% 0,33W  
RESISTOR, FIXED, OTHERS <20W 1K20 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 8R20 5% 0,33W  
RESISTOR, FIXED, OTHERS <20W 1K20 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 470R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 10K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 15K 1% 0,1W  
RESISTOR, FIXED, OTHERS <20W 10K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 10K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 4K70 5% 0,1W  
RESISTOR, FIXED, OTHERS <20W 4K70 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 47K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 220R00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 47K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 75K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 10K00 1% 0,6W  
RESISTOR, FIXED, OTHERS <20W 150K00 1% 0,6W

4822 050 11003	9130	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,4W
4822 050 21005	9150	RESISTOR, FIXED, OTHERS <20W	1M00 1% 0,6W
4822 117 10834	9170	RESISTOR, FIXED, OTHERS <20W	47K 1% 0,1W
4822 117 10834	9190	RESISTOR, FIXED, OTHERS <20W	47K 1% 0,1W
4822 050 21001	9210	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 051 20101	9230	RESISTOR, FIXED, OTHERS <20W	100R00 5% 0,1W
4822 050 21001	9250	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
2138 105 00335	9270	RESISTOR, FIXED, OTHERS <20W	RST MOX5W RSM5WL S 680R PM5 B
2138 105 00334	9290	RESISTOR, FIXED, OTHERS <20W	RST MOX5W RSM5WS S 2K2 PM5 B
4822 050 24709	9310	RESISTOR, FIXED, OTHERS <20W	47R00 1% 0,6W
4822 050 21003	9330	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,6W
2138 105 00335	9350	RESISTOR, FIXED, OTHERS <20W	RST MOX5W RSM5WL S 680R PM5 B
2138 105 00333	9370	RESISTOR, FIXED, OTHERS <20W	RST MOX 7W RSH S 2R2 PM5 B
4822 117 13081	9390	RESISTOR, FIXED, OTHERS <20W	68R 1% 0,5W
4822 117 12675	9410	RESISTOR, FIXED, OTHERS <20W	150R 5% 5W
4822 117 12675	9430	RESISTOR, FIXED, OTHERS <20W	150R 5% 5W
4822 050 24701	9450	RESISTOR, FIXED, OTHERS <20W	470R00 1% 0,6W
4822 050 24701	9470	RESISTOR, FIXED, OTHERS <20W	470R00 1% 0,6W
4822 117 13081	9490	RESISTOR, FIXED, OTHERS <20W	68R 1% 0,5W
4822 050 21002	9510	RESISTOR, FIXED, OTHERS <20W	1K00 1% 0,6W
4822 117 13081	9530	RESISTOR, FIXED, OTHERS <20W	68R 1% 0,5W
4822 050 24708	9550	RESISTOR, FIXED, OTHERS <20W	4R70 1% 0,6W
4822 052 10159	9570	RESISTOR, FIXED, OTHERS <20W	15R00 5% 0,33W
4822 052 10159	9590	RESISTOR, FIXED, OTHERS <20W	15R00 5% 0,33W
4822 050 24701	9610	RESISTOR, FIXED, OTHERS <20W	470R00 1% 0,6W
4822 117 10833	9630	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 050 21001	9650	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 117 10833	9670	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 051 20182	9690	RESISTOR, FIXED, OTHERS <20W	1K80 5% 0,1W
4822 050 21202	9710	RESISTOR, FIXED, OTHERS <20W	1K20 1% 0,6W
2138 101 13121	9730	RST CRB CFR-12 A 120R PM5 A	RST CRB CFR-12 A 120R PM5 A
4822 050 21003	9750	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,6W
4822 117 10442	9770	RESISTOR, FIXED, OTHERS <20W	10R 5%
4822 117 12941	9790	RESISTOR, FIXED, OTHERS <20W	33R 5% 7W
4822 052 11479	9810	RESISTOR, FIXED, OTHERS <20W	47R00 5% 0,5W
4822 052 10108	9830	RESISTOR, FIXED, OTHERS <20W	1R00 5% 0,33W
4822 052 10108	9850	RESISTOR, FIXED, OTHERS <20W	1R00 5% 0,33W
4822 050 24702	9870	RESISTOR, FIXED, OTHERS <20W	4K70 1% 0,6W
4822 050 21003	9890	RESISTOR, FIXED, OTHERS <20W	10K00 1% 0,6W
4822 117 10833	9910	RESISTOR, FIXED, OTHERS <20W	10K 1% 0,1W
4822 051 20202	9930	RESISTOR, FIXED, OTHERS <20W	2K00 5% 0,1W
4822 050 24702	9950	RESISTOR, FIXED, OTHERS <20W	4K70 1% 0,6W
4822 052 11108	9970	RESISTOR, FIXED, OTHERS <20W	1R00 5% 0,5W
4822 050 12202	9990	RESISTOR, FIXED, OTHERS <20W	2K20 1% 0,4W
3138 178 06410	HOR TRANS ASSY(6508/7502)		
4822 466 93161	2070	INSULATOR	
4822 466 92891	2090	INSULATOR	
5322 390 20011	2130	LUBRICANT	PASTE P4 20ML WACKER 060003084
9322 136 02687	2150	DIODE	DIO REC 5TUZ52C (TSOJ) L
9322 144 42671	2170	TRANSISTOR, <1W	TRA POW 2SC5445(AS) (TOSJ) Y
3138 178 06980	VERT IC ASSY(7567-STV9379)		
4822 466 93161	2090	INSULATOR	
4822 492 62076	2110	SPRING	FOR TRANSISTORS
5322 390 20011	2130	LUBRICANT	PASTE P4 20ML WACKER 060003084
4822 209 31472	2150	IC ANA OTHERS	STV9379
3138 178 06990	BUCK TRANS. ASSY		
5322 390 20011	2430	LUBRICANT	PASTE P4 20ML WACKER 060003084
9322 118 29687	2450	TRANSISTOR, FET <1W	2SJ448
3138 178 04660	EHT TRANS ASSY(7672/7673)		

4822 701 20292	2450	SCREW, STEEL	
5322 390 20011	2470	LUBRICANT	PASTE P4 20ML WACKER 060003084
9319 001 79687	2490	TRANSISTOR, FET <1W	FET POW IRF740 (SMGK) L
4822 130 11232	2510	TRANSISTOR, FET >=1W	FS7UM16A
3138 178 07020	12V REG ASSY(7363-L7812)		
5322 390 20011	2630	LUBRICANT	PASTE P4 20ML WACKER 060003084
4822 209 81726	2650	IC ANA VOLT./CURR. REGULATOR	MC7812CT
3138 178 07030	S-CAP MOSFET ASSY(7622-SLA5058)		
5322 390 20011	2770	LUBRICANT	PASTE P4 20ML WACKER 060003084
9322 145 62667	2790	TRANSISTOR, FET >=1W	FET POW SLA5085 (SAKJ) L
3138 178 07040	POW O/P ASSY(7121-STR F6656)		
4822 492 62076	2910	SPRING	FOR TRANSISTORS
5322 390 20011	2930	LUBRICANT	PASTE P4 20ML WACKER 060003084
4822 209 16816	2950	IC ANA OTHERS	STR-F6656(LF1351)
3138 178 07220	DIODE ASSY(6672-31DF6/8E)		
4822 130 10746	3010	DIODE, POWER RECTIFIER	31DF6
3138 178 07050	DIODE ASSY (6135-BYW98-200)		
4822 130 83909	3070	DIODE, POWER RECTIFIER	BYW98-200RL
3138 178 07170	DIODE ASSY(6134-BYW98-200)		
4822 130 83909	3130	DIODE, POWER RECTIFIER	BYW98-200RL
3138 178 07180	DIODE ASSY(6137-BYW98-200)		
4822 130 83909	3190	DIODE, POWER RECTIFIER	BYW98-200RL
3138 178 07190	DIODE ASSY(6139-BYW98-200)		
4822 130 83909	3250	DIODE, POWER RECTIFIER	BYW98-200RL
3138 178 07080	8V REG ASSY(7364-L7808)		
5322 390 20011	3350	LUBRICANT	PASTE P4 20ML WACKER 060003084
4822 209 33083	3370	IC ANA VOLT./CURR. REGULATOR	L7808CV
3138 178 07090	DRIDGE ASSY(6101-GBU6J)		
5322 390 20011	3470	LUBRICANT	PASTE P4 20ML WACKER 060003084
4822 130 10741	3490	DIODE, BRIDGE	GBU6J
3138 178 51070	IC DIG MOS EEPROM		
5322 255 40958	3690	EEPROM IC ASSY(7336-M24C16)	8-DIP-S-LC
3138 178 04700	PR.CIRCUIT, MONITOR		
4822 265 10782	8670	TERMINAL PCB ASSY	
3138 178 79620	8690	CONNECTOR, ELECTRICAL OTHERS	887 BM M 6P M2.50 RED B
2438 031 00417	8710	CONNECTOR, ELECTRICAL OTHERS	CON BM H 10P M 2.5 625/626 B
3138 168 73680	8730	CONNECTOR, ELECTRICAL OTHERS	CON BM PAM V 15P F SUB-D B
2038 035 50227	8750	CONNECTOR, COAXIAL	BNC CONNECTOR ASSY
2038 035 50312	8770	CAPACITOR, ELECTROLYTIC ALU.	ELCAP SS 10V S 220U PM20 A
2038 035 00037	8790	CAPACITOR, ELECTROLYTIC ALU.	220UF 20% 16V
2038 035 00037	8810	ELCAP 16V S 47U PM20 A	ELCAP 16V S 47U PM20
2038 035 00037	8830	ELCAP 16V S 47U PM20 A	ELCAP 16V S 47U PM20
2038 035 00037	8850	ELCAP 16V S 47U PM20 A	ELCAP 16V S 47U PM20
2238 910 16649	8870	ELCAP 16V S 47U PM20 A	ELCAP 16V S 47U PM20
2238 910 16649	8890	CER2 0805 X7R 25V 100N PM10 R	CER2 0805 X7R 25V 100N PM10 R
2038 035 00037	8910	CER2 0805 X7R 25V 100N PM10 R	CER2 0805 X7R 25V 100N PM10 R
2038 035 00037	8930	ELCAP 16V S 47U PM20 A	ELCAP 16V S 47U PM20
2238 910 16649	8950	ELCAP 16V S 47U PM20 A	ELCAP 16V S 47U PM20
5322 122 32448	8970	CER2 0805 X7R 25V 100N PM10 R	CER2 0805 X7R 25V 100N PM10 R
5322 122 32448	8990	CAPACITOR, CERAMIC SMD	10PF 5% NP0 63V CASE 0805
5322 122 32448	9010	CAPACITOR, CERAMIC SMD	10PF 5% NP0 63V CASE 0805
		CAPACITOR, CERAMIC SMD	10PF 5% NP0 63V CASE 0805



5322 122 32448	9030	CAPACITOR, CERAMIC SMD	10PF 5% NP0 63V CASE 0805
2038 035 50227	9050	CAPACITOR, ELECTROLYTIC ALU.	ELCAP SS 10V S 220U PM20 A
2038 035 50227	9070	CAPACITOR, ELECTROLYTIC ALU.	ELCAP SS 10V S 220U PM20 A
2038 035 50227	9090	CAPACITOR, ELECTROLYTIC ALU.	ELCAP SS 10V S 220U PM20 A
5322 122 32658	9110	CAPACITOR, CERAMIC SMD	22PF 5% 50V
5322 122 32658	9130	CAPACITOR, CERAMIC SMD	22PF 5% 50V
5322 122 32658	9150	CAPACITOR, CERAMIC SMD	22PF 5% 50V
5322 122 32658	9170	CAPACITOR, CERAMIC SMD	22PF 5% 50V
2238 910 16649	9190	CER2 0805 X7R 25V 100N PM10 R	CER2 0805 X7R 25V 100N PM10 R
2238 910 16649	9210	CER2 0805 X7R 25V 100N PM10 R	CER2 0805 X7R 25V 100N PM10 R
4822 117 11449	9230	RESISTOR, FIXED, CARBON	2K2 5% 0,1W 0805
4822 117 11449	9250	RESISTOR, FIXED, CARBON	2K2 5% 0,1W 0805
4822 051 20479	9270	RESISTOR, FIXED, OTHERS <20W	47R00 5% 0,1W
4822 117 11927	9290	RESISTOR, FIXED, OTHERS <20W	75R 1% 0,1W
4822 051 20479	9310	RESISTOR, FIXED, OTHERS <20W	47R00 5% 0,1W
4822 117 11927	9330	RESISTOR, FIXED, OTHERS <20W	75R 1% 0,1W
4822 051 20479	9350	RESISTOR, FIXED, OTHERS <20W	47R00 5% 0,1W
4822 117 11927	9370	RESISTOR, FIXED, OTHERS <20W	75R 1% 0,1W
4822 051 20471	9390	RESISTOR, FIXED, OTHERS <20W	470R00 5% 0,1W
4822 051 20471	9410	RESISTOR, FIXED, OTHERS <20W	470R00 5% 0,1W
4822 051 20471	9430	RESISTOR, FIXED, OTHERS <20W	470R00 5% 0,1W
4822 051 20471	9450	RESISTOR, FIXED, OTHERS <20W	470R00 5% 0,1W
4822 051 20479	9470	RESISTOR, FIXED, OTHERS <20W	47R00 5% 0,1W
4822 117 11927	9490	RESISTOR, FIXED, OTHERS <20W	75R 1% 0,1W
4822 117 11449	9510	RESISTOR, FIXED, CARBON	2K2 5% 0,1W 0805
4822 051 20479	9530	RESISTOR, FIXED, OTHERS <20W	47R00 5% 0,1W
4822 117 11927	9550	RESISTOR, FIXED, OTHERS <20W	75R 1% 0,1W
4822 051 20479	9570	RESISTOR, FIXED, OTHERS <20W	47R00 5% 0,1W
4822 117 11927	9590	RESISTOR, FIXED, OTHERS <20W	75R 1% 0,1W
4822 117 11449	9610	RESISTOR, FIXED, CARBON	2K2 5% 0,1W 0805
4822 152 20596	9630	COIL	
4822 152 20596	9650	COIL	
4822 152 20596	9670	COIL	
9322 142 60682	9690	IC ANA OTHERS	IC AN5870 (MATJ) L
3138 178 51480	PR.CIRCUIT, MONITOR	201BMAX-ENCORDER PCB ASSY	
2422 129 16326	3670	SWITCH, ROTARY ENCODER	ROT ENCODER 24P EC12E2420404 B
4822 276 14028	3690	SWITCH UNIT, PUSH-BUTTON	
4822 276 14028	3710	SWITCH UNIT, PUSH-BUTTON	
2238 910 16649	3730	CER2 0805 X7R 25V 100N PM10 R	CER2 0805 X7R 25V 100N PM10 R
2238 910 16649	3750	CER2 0805 X7R 25V 100N PM10 R	CER2 0805 X7R 25V 100N PM10 R
2238 910 16649	3770	CER2 0805 X7R 25V 100N PM10 R	CER2 0805 X7R 25V 100N PM10 R
4822 050 22702	3790	RESISTOR, FIXED, OTHERS <20W	2K70 1% 0,6W
4822 050 25102	3810	RESISTOR, FIXED, OTHERS <20W	5K10 1% 0,6W
2422 549 44197	3830	COIL	IND FXD SM EMI 100MHZ 220R R
3138 178 51110	PR.CIRCUIT, MONITOR	109PMAX-LED PCB ASSY	
9322 146 03682	7170	LED	LED VS L-3WYGW (KIEL) B
3138 178 50320	PR.CIRCUIT, MONITOR	POWER DOWN PCB ASSY	
2438 031 00048	8230	CONNECTOR, PRINTED CIRCUIT	3P. MALE
4822 121 10634	8250	CAPACITOR, FILM	47NF 10% 630V
4822 050 21001	8270	RESISTOR, FIXED, OTHERS <20W	100R00 1% 0,6W
4822 050 24704	8290	RESISTOR, FIXED, OTHERS <20W	470K00 1% 0,6W
4822 053 21225	8310	RESISTOR, FIXED, OTHERS <20W	2M20 5% 0,5W
4822 130 31393	8330	DIODE	BYT52J
4822 130 30842	8350	DIODE	BAV21
4822 130 42231	8370	TRANSISTOR, <1W	BC557C
3138 178 51490	PR.CIRCUIT, MONITOR	201BMAX-VIDEO PCB ASSY	
4822 051 20102	0010	RESISTOR, FIXED, OTHERS <20W	1K00 5% 0,1W
4822 117 11383	0030	RESISTOR, FIXED, OTHERS <20W	12K 1% 0,1W
4822 051 20102	0050	RESISTOR, FIXED, OTHERS <20W	1K00 5% 0,1W

4822 051 20101	0070	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 051 20101	0090	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 051 20101	0110	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 051 20471	0130	RESISTOR, FIXED, OTHERS <20W	470R00	5%	0,1W
4822 051 20471	0150	RESISTOR, FIXED, OTHERS <20W	470R00	5%	0,1W
4822 117 11927	0170	RESISTOR, FIXED, OTHERS <20W	75R	1%	0,1W
4822 051 20479	0190	RESISTOR, FIXED, OTHERS <20W	47R00	5%	0,1W
4822 051 20229	0210	RESISTOR, FIXED, OTHERS <20W	22R00	5%	0,1W
4822 051 20479	0230	RESISTOR, FIXED, OTHERS <20W	47R00	5%	0,1W
4822 051 20105	0250	RESISTOR, FIXED, OTHERS <20W	1M00	5%	0,1W
4822 050 25603	0270	RESISTOR, FIXED, OTHERS <20W	56K00	1%	0,6W
4822 050 12204	0290	RESISTOR, FIXED, OTHERS <20W	220K00	1%	0,4W
4822 117 11149	0310	RESISTOR, FIXED, OTHERS <20W	82K	1%	0,1W
4822 116 52195	0330	RESISTOR, FIXED, OTHERS <20W	47E	5%	0,5W
4822 051 20102	0350	RESISTOR, FIXED, OTHERS <20W	1K00	5%	0,1W
4822 117 11383	0370	RESISTOR, FIXED, OTHERS <20W	12K	1%	0,1W
4822 117 11449	0390	RESISTOR, FIXED, CARBON	2K2	5%	0,1W 0805
4822 117 11448	0410	RESISTOR, FIXED, CARBON	180R	1%	0,1W
4822 051 20101	0430	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 051 20471	0450	RESISTOR, FIXED, OTHERS <20W	470R00	5%	0,1W
4822 051 20101	0470	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 051 20105	0490	RESISTOR, FIXED, OTHERS <20W	1M00	5%	0,1W
4822 051 20105	0510	RESISTOR, FIXED, OTHERS <20W	1M00	5%	0,1W
4822 117 11927	0530	RESISTOR, FIXED, OTHERS <20W	75R	1%	0,1W
4822 051 20479	0550	RESISTOR, FIXED, OTHERS <20W	47R00	5%	0,1W
4822 051 20229	0570	RESISTOR, FIXED, OTHERS <20W	22R00	5%	0,1W
4822 051 20569	0590	RESISTOR, FIXED, OTHERS <20W	56R00	5%	0,1W
4822 051 20105	0610	RESISTOR, FIXED, OTHERS <20W	1M00	5%	0,1W
4822 050 25603	0630	RESISTOR, FIXED, OTHERS <20W	56K00	1%	0,6W
4822 050 12204	0650	RESISTOR, FIXED, OTHERS <20W	220K00	1%	0,4W
4822 117 11149	0670	RESISTOR, FIXED, OTHERS <20W	82K	1%	0,1W
4822 116 52195	0690	RESISTOR, FIXED, OTHERS <20W	47E	5%	0,5W
4822 051 20102	0710	RESISTOR, FIXED, OTHERS <20W	1K00	5%	0,1W
4822 117 11383	0730	RESISTOR, FIXED, OTHERS <20W	12K	1%	0,1W
4822 116 80548	0750	RESISTOR, FIXED, OTHERS <20W	15K	5%	0,5W
4822 050 24701	0770	RESISTOR, FIXED, OTHERS <20W	470R00	1%	0,6W
4822 050 21502	0790	RESISTOR, FIXED, OTHERS <20W	1K50	1%	0,6W
4822 050 21804	0810	RESISTOR, FIXED, OTHERS <20W	180K00	1%	0,6W
4822 051 20101	0830	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 051 20101	0850	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 051 20102	0870	RESISTOR, FIXED, OTHERS <20W	1K00	5%	0,1W
4822 117 11139	0890	RESISTOR, FIXED, OTHERS <20W	1K5	1%	0,1W
4822 051 20562	0910	RESISTOR, FIXED, OTHERS <20W	5K6	5%	0,1W 0805
4822 117 11139	0930	RESISTOR, FIXED, OTHERS <20W	1K5	1%	0,1W
4822 051 20182	0950	RESISTOR, FIXED, OTHERS <20W	1K80	5%	0,1W
4822 051 20105	0970	RESISTOR, FIXED, OTHERS <20W	1M00	5%	0,1W
4822 051 20102	0990	RESISTOR, FIXED, OTHERS <20W	1K00	5%	0,1W
4822 117 10833	1010	RESISTOR, FIXED, OTHERS <20W	10K	1%	0,1W
4822 051 20332	1030	RESISTOR, FIXED, OTHERS <20W	3K30	5%	0,1W
4822 051 20101	1050	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 051 20101	1070	RESISTOR, FIXED, OTHERS <20W	100R00	5%	0,1W
4822 117 10833	1090	RESISTOR, FIXED, OTHERS <20W	10K	1%	0,1W
4822 051 20332	1110	RESISTOR, FIXED, OTHERS <20W	3K30	5%	0,1W
4822 117 11145	1130	RESISTOR, FIXED, OTHERS <20W	4K70	1%	0,1W
4822 051 20008	1150	RESISTOR, FIXED, OTHERS <20W	0R00	JUMP.	(0805)
4822 051 20008	1170	RESISTOR, FIXED, OTHERS <20W	0R00	JUMP.	(0805)
4822 051 20008	1190	RESISTOR, FIXED, OTHERS <20W	0R00	JUMP.	(0805)
4822 152 20596	1210	COIL			
3138 178 76910	1230	COIL	0.12UH	10%	
2422 549 44197	1250	COIL	IND FXD SM	EMI 100MHZ 220R R	
3138 178 76910	1270	COIL	0.12UH	10%	
2422 549 44197	1290	COIL	IND FXD SM	EMI 100MHZ 220R R	
3138 178 76910	1310	COIL	0.12UH	10%	

2422 549 44197	1330	COIL	IND FXD SM EMI 100MHZ 220R R
2422 549 44197	1350	COIL	IND FXD SM EMI 100MHZ 220R R
4822 152 20596	1370	COIL	
2422 549 44197	1390	COIL	IND FXD SM EMI 100MHZ 220R R
2422 549 44197	1410	COIL	IND FXD SM EMI 100MHZ 220R R
2422 549 44197	1430	COIL	IND FXD SM EMI 100MHZ 220R R
3138 168 74510	1450	BEAD, FERRITE	FERRITE BEAD
2422 549 44197	1470	COIL	IND FXD SM EMI 100MHZ 220R R
2422 549 44197	1490	COIL	IND FXD SM EMI 100MHZ 220R R
2422 549 44197	1510	COIL	IND FXD SM EMI 100MHZ 220R R
2422 549 44197	1530	COIL	IND FXD SM EMI 100MHZ 220R R
2422 549 44197	1550	COIL	IND FXD SM EMI 100MHZ 220R R
4822 152 20596	1570	COIL	
3138 168 74510	1590	BEAD, FERRITE	FERRITE BEAD
4822 152 20596	1630	COIL	
4822 152 20596	1650	COIL	
3138 178 78600	1670	BEAD, FERRITE	BEAD 07UH VERT.
4822 152 20596	1690	COIL	
2422 549 44197	1710	COIL	IND FXD SM EMI 100MHZ 220R R
4822 130 80877	1730	DIODE	BAV103
4822 130 80877	1750	DIODE	BAV103
4822 130 80877	1770	DIODE	BAV103
4822 130 80877	1790	DIODE	BAV103
4822 130 80446	1810	DIODE	BAS32L
4822 130 80877	1830	DIODE	BAV103
4822 130 80877	1850	DIODE	BAV103
4822 130 80877	1870	DIODE	BAV103
4822 130 80877	1890	DIODE	BAV103
4822 130 80446	1910	DIODE	BAS32L
4822 130 80446	1930	DIODE	BAS32L
5322 130 34337	1950	DIODE	BAV99
4822 130 80877	1970	DIODE	BAV103
4822 130 80877	1990	DIODE	BAV103
4822 130 80877	2010	DIODE	BAV103
4822 130 80877	2030	DIODE	BAV103
4822 130 80446	2050	DIODE	BAS32L
4822 130 42489	2070	DIODE, POWER RECTIFIER	BYD33G
4822 130 34328	2090	DIODE, REFERENCE	BZX79-B30
9352 640 61112	2110	IC ANA OTHERS	
4822 130 41782	2130	TRANSISTOR, <1W	BF422
4822 130 41782	2150	TRANSISTOR, <1W	BF422
4822 130 41782	2170	TRANSISTOR, <1W	BF422
4822 130 41782	2190	TRANSISTOR, <1W	BF422
4822 130 41782	2210	TRANSISTOR, <1W	BF422
4822 130 41782	2230	TRANSISTOR, <1W	BF422
8238 274 35560	2250	IC DIG MOS OTHERS	IC LSC4588P2
4822 130 10829	2270	TRANSISTOR, <1W	MUN2211J
4822 130 10829	2290	TRANSISTOR, <1W	MUN2211J
3138 168 72890	2310	CABLE, CONNECTING	RGB BOARD IN WIRE ASSY
4822 701 20292	8130	SCREW, STEEL	
5322 390 20011	8250	LUBRICANT	PASTE P4 20ML WACKER 060003084
4822 267 10763	8430	CONNECTOR, PRINTED CIRCUIT	10 P. MALE
4822 267 10762	8450	CONNECTOR, PRINTED CIRCUIT	11P. MALE
4822 255 10379	8470	CONNECTOR, PICTURE TUBE	HPS0720-011100
5322 122 32287	8510	CAPACITOR, CERAMIC SMD	4,7PF 5%NP0 50V
5322 122 34098	8530	CAPACITOR, CERAMIC SMD	10NF10%X7R 63V
4822 124 12231	8550	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 160V NK
4822 124 12336	8570	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 250V
2422 549 44346	8590	SPARK GAP	SURGE PROTECT DSP-201M-D04F A
4822 126 14585	8610	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 126 14585	8630	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 126 14585	8650	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 126 13692	8690	CAPACITOR, CERAMIC SMD	47PF 1% NP0 63V

5322 122 32287	8710	CAPACITOR, CERAMIC SMD	4,7PF 5%NP0 50V
5322 122 34098	8730	CAPACITOR, CERAMIC SMD	10NF10%X7R 63V
4822 124 12231	8750	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 160V NK
4822 124 12336	8770	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 250V
2422 549 44346	8790	SPARK GAP	SURGE PROTECT DSP-201M-D04F A
4822 126 14585	8810	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 051 20008	8830	RESISTOR, FIXED, OTHERS <20W	0R00 JUMP. (0805)
4822 126 14107	8850	CAPACITOR, CERAMIC SMD	330NF +-80/20% Y5V 25V
5322 122 32658	8870	CAPACITOR, CERAMIC SMD	22PF 5% 50V
5322 122 32287	8890	CAPACITOR, CERAMIC SMD	4,7PF 5%NP0 50V
5322 122 34098	8910	CAPACITOR, CERAMIC SMD	10NF10%X7R 63V
4822 124 12231	8930	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 160V NK
4822 124 12336	8950	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 250V
2422 549 44346	8970	SPARK GAP	SURGE PROTECT DSP-201M-D04F A
4822 124 11965	8990	CAPACITOR, ELECTROLYTIC ALU.	47UF 20% 25V
4822 126 14585	9010	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 126 14585	9030	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 126 14585	9050	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 124 12331	9070	CAPACITOR, ELECTROLYTIC ALU.	47UF 20% 100V
4822 124 12336	9090	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 250V
4822 126 14585	9110	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 126 12651	9130	CAPACITOR, CERAMIC WITH WIRES	10NF20% 2K
4822 126 14275	9150	CAPACITOR, CERAMIC WITH WIRES	470PF 2KV
4822 122 33968	9170	CAPACITOR, CERAMIC WITH WIRES	1NF 5% 500V
4822 126 14557	9190	CAPACITOR, CERAMIC WITH WIRES	220PF 10% Y5P 1KV
4822 126 14269	9210	CAPACITOR, CERAMIC WITH WIRES	220PF 10% 2KV
4822 124 40248	9230	CAPACITOR, ELECTROLYTIC ALU.	10UF20% 63V
4822 126 14585	9250	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 124 11965	9270	CAPACITOR, ELECTROLYTIC ALU.	47UF 20% 25V
4822 126 14585	9290	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 126 14585	9310	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 124 81131	9330	CAPACITOR, ELECTROLYTIC ALU.	330UF20% 16V
4822 126 14585	9350	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 124 11965	9370	CAPACITOR, ELECTROLYTIC ALU.	47UF 20% 25V
4822 126 14585	9390	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 124 12331	9410	CAPACITOR, ELECTROLYTIC ALU.	47UF 20% 100V
4822 121 43696	9430	CAPACITOR, FILM	100NF 100V
4822 124 12336	9450	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 250V
4822 121 70162	9470	CAPACITOR, FILM	10NF5% 400V
5322 122 32658	9490	CAPACITOR, CERAMIC SMD	22PF 5% 50V
5322 122 32658	9510	CAPACITOR, CERAMIC SMD	22PF 5% 50V
5322 122 32658	9530	CAPACITOR, CERAMIC SMD	22PF 5% 50V
5322 122 32658	9550	CAPACITOR, CERAMIC SMD	22PF 5% 50V
4822 126 14585	9570	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 126 14585	9590	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
5322 122 32531	9610	CAPACITOR, CERAMIC SMD	100PF 5%NP0 50V
5322 122 32531	9630	CAPACITOR, CERAMIC SMD	100PF 5%NP0 50V
4822 124 41643	9650	CAPACITOR, ELECTROLYTIC ALU.	100UF 20% 16V DIM:6,3X11MM
5322 126 10223	9670	CAPACITOR, CERAMIC SMD	4,7NF10%X7R 63V
5322 122 32531	9690	CAPACITOR, CERAMIC SMD	100PF 5%NP0 50V
4822 122 33575	9710	CAPACITOR, CERAMIC SMD	220PF 5% NP0 63V CASE 0805
5322 122 32654	9730	CAPACITOR, CERAMIC SMD	CER2 0805 X7R 63V 22N PM10 R
4822 122 33575	9750	CAPACITOR, CERAMIC SMD	220PF 5% NP0 63V CASE 0805
4822 124 41643	9770	CAPACITOR, ELECTROLYTIC ALU.	100UF 20% 16V DIM:6,3X11MM
4822 126 14585	9790	CAPACITOR, CERAMIC SMD	100NF 10% X7R 0805 50V
4822 124 12336	9810	CAPACITOR, ELECTROLYTIC ALU.	1UF 20% 250V
4822 117 11927	9830	RESISTOR, FIXED, OTHERS <20W	75R 1% 0,1W
4822 051 20479	9850	RESISTOR, FIXED, OTHERS <20W	47R00 5% 0,1W
4822 051 20229	9870	RESISTOR, FIXED, OTHERS <20W	22R00 5% 0,1W
4822 051 20569	9890	RESISTOR, FIXED, OTHERS <20W	56R00 5% 0,1W
4822 051 20105	9910	RESISTOR, FIXED, OTHERS <20W	1M00 5% 0,1W
4822 050 25603	9930	RESISTOR, FIXED, OTHERS <20W	56K00 1% 0,6W
4822 050 12204	9950	RESISTOR, FIXED, OTHERS <20W	220K00 1% 0,4W

4822 117 11149 9970  
4822 116 52195 9990

RESISTOR, FIXED, OTHERS <20W  
RESISTOR, FIXED, OTHERS <20W

82K 1% 0,1W  
47E 5% 0,5W

3138 178 06390 VIDEO IC ASSY LM2402(7705)

5322 390 20011 0010

9322 138 01667 0030

4822 701 20292 9990

LUBRICANT  
IC ANA OTHERS  
SCREW, STEEL

PASTE P4 20ML WACKER 060003084  
LM2402T

## GENERAL PRODUCT SPECIFICATION

### GENERAL PRODUCT SPECIFICATION

- . MICRO PROCESSOR - BASED DIGITAL CONTROL WITH 7 FACTORY PRESETS AND 36 USER MODES TO ENSURE PICTURE CONFIGURATIONS ARE ALWAYS MAINTAINED WHEN SWITCH BETWEEN COMMON VIDEO MODES AND USER DEFINED CUSTOM MODES.
- . USER FRIENDLY OSD DISPLAY FOR MODE IDENTIFICATION/ADJUSTMENT
- . DDC1/2B COMMUNICATION CAPABILITY
- . CUSTOMAX (OPTION) FOR MONITOR CONTROL AND ADJUSTMENT
- . MAX. RESOLUTION 1792 X 1344 NON - INTERLACED AT 75 HZ
- . 21" 0.26 MM SHADOW MASK PICTURE TUBE
- . EASY TILT & SWIVEL BASE
- . FULL RANGE POWER SUPPLY 90- 264 VAC
- . CE ENVIRONMENTAL POLICY
- . FLAT SQUARE TUBE TO REDUCE LIGHT REFLECTION
- . POWER MANAGEMENT CAPABILITY
- . PROVIDE USB.HUB & DEVICE FUNCTION ( OPTION )
- . LOW EMISSION TCO 99
- . MOIRE' CANCELLATION
- . AUTO CALIBRATE FUNCTION





## CONTENTS

1.0	Foreword
2.0	Product profile
2.1	CRT
2.2	Scanning frequencies
2.3	Video dot rate
2.4	Power input
2.5	Power consumption
2.6	Dimensions
2.7	Weight
2.8	Functions
2.9	Ambient temperature
2.10	Regulatory compliance
3.0	Electrical characteristics
3.1	Interface signals
3.2	Interface
3.2.1	Cable
3.2.2	Adaptor
3.2.3	OSD function control
3.3	Timing requirement
3.3.1	Mode storing capacity
3.3.2	Factory preset timings
3.3.3	Horizontal scanning
3.3.4	Vertical scanning
3.4	Power input connection
3.5	Video amplifiers
3.6	Degaussing
3.7	Requirement for low emission
3.8	Power management
3.9	Display identification
3.10	Customax
4.0	Visual characteristics
4.1	Test conditions
4.2	Resolution
4.3	Brightness

## GENERAL PRODUCT SPECIFICATION

4.4	Flagwaving- jitter
4.5	Image size
4.5.1	Actual display size
4.5.2	Max. scan size
4.6	Image centering deviation
4.7	Picture shift range
4.8	Display dimension stability
4.9	Geometric distortions
4.10	Picture tilt
4.11	Image non-linearity
4.12	Misconvergence
4.13	Focus check
4.14	Brightness uniformity
4.15	White color adjustment
4.16	White uniformity
4.17	Color tracking on full white pattern
4.18	Purity
4.19	Moire
5.0	Mechanical characteristics
5.1	Controls
5.2	Unit dimension / weight
5.3	Tilt and swivel base
5.4	Transportation packages
5.4.1	Shipping dimension / weight
5.4.2	Block unit / palletization
6.0	Environmental characteristics
6.1	Susceptibility of display to external environment
6.2	Transportation tests
6.3	Display disturbances from external environment
6.4	Display disturbances to external environment
6.4.1	Ionizatic radiation
6.4.2	EMI
7.0	Reliability
7.1	Mean time between failures
8.0	Quality assurance requirements
8.1	Acceptance test
9.0	Serviceability

## 1.0 FOREWORD

This specification describes a 21" high resolution digitally controlled autoscanned color monitor with max. resolution up to 1792x1344/75Hz noninterlaced.

## 2.0 PRODUCT PROFILE

This display monitor unit is a complete color display monitor enclosed in a global styling cabinet which has an integrated tilt and swivel base.

### 2.1 CRT

Type NR.	: M51LLB183X61 (BH) (HITACHI)
Dimensions	: 21" shadow mask
Pitch ( mm )	: 0.26
Shadow mask	: Invar mask
Deflection angle	: 90 deg
Light transmission	: 43% (Dark Faceplate Glass)
Surface plate coating	
--Antiglare	: AR-ASC (Anti-Reflection and Anti Static Charge) Coating
Phosphor	: P22
EHT	: 27.0 KV
Useful minimum screen ( mm )	: 406 X 304

### 2.2 Scanning frequencies

Hor. : 30 - 107KHz      Ver. : 50 - 160 Hz

## GENERAL PRODUCT SPECIFICATION

- 2.3 Video dot rate : 261MHz
- 2.4 Power input : 90 - 264 Vac, 47-63 Hz
- 2.5 Power consumption : 115 W typ.
- 2.6 Dimensions : 482(W) x 477(H) x 467(D) mm
- 2.7 Weight : 24 kg

## 2.8 Functions :

- (1) R/G/B separate analog inputs, H/V composite sync, sync. on green.
- (2) Automatic (Power on) and manual degaussing circuit.

## 2.9 Ambient temperature : 0-35° C

## 2.10 Regulatory compliance :

- (1) Safety : UL 1950  
: CSA C22.2 NO. 950  
: IEC950/ EN60950
- (2) EMI : FCC PART 15 class B  
: D.O.C. Class B  
: EN55022 Class B  
: CE mark
- (3) X-RAY Radiation requirement / regulation  
: DHHS 21 CFR Subchapter J.
- (4) Low Radiation  
: TCO99
- (5) Environmental Issue  
: Per CE and BU policy
- (6) Ergonomic Requirements  
: ZH 1/618  
: EN 9241-3 / ISO 9241-3 (7/92) / ISO 9241-8

## 3.0 Electrical characteristics



### 3.1 Interface signals

The input signals can be applied in two different modes :

- 1). Video, Hsync., Vsync.
- 2). Video, CompositeSync

Video : 0.7 Vp-p, input impedance, 75 ohm

Sync. : Separate sync	TTL level, input impedance 2k2 ohm
Hor. sync	Positive/Negative
Ver. sync	Positive/Negative
Composite sync	TTL level, Input impedance 2k2 ohm Positive/Negative

### 3.2 Interface

#### 3.2.1 Cable

The input signals are applied to the display through a detachable shielded cable.

Length : 1.5 m +/- 50 mm (detachable)

Connector type : 15 pin D-Sub male to 15 pin D-Sub male, blue with icon  
IBM PS/2 standard (3 rows)  
with DDC1/ 2B pin assignments



## GENERAL PRODUCT SPECIFICATION

pin assignment :

pin no.	
1	Red video input
2	Green video input / Sync on green
3	Blue video input
4	Optional- connected to pin 10
5	Not connected
6	Red video ground
7	Green video ground
8	Blue video ground
9	+5V
10	Sync ground
11	Optional- connected to pin 10
12	Bi-directional data (SDA)
13	H/H+V sync
14	V sync (VCLK)
15	Data clock (SCL)

3.2.2 Adaptor 15 pin D-standard (2 rows male) to 15 pin D-sub (female)  
for use with Apple Macintosh II . pin assignment :

pin no	15 Pin D-standard
1	RED GND
2	RED VIDEO
3	COMPOSITE SYNC
4	SYNC GND
5	GREEN VIDEO
6	GREEN GND
7	NC
8	NC
9	BLUE VIDEO
10	NC
11	NC
12	NC
13	BLUE GND
14	NC
15	NC



## 3.2.3 Software control functions via OSD/control

- Adjustable functions:

Main Controls
Language
Input
Zoom
Adjust horizontal
Adjust vertical
Adjust shape
Adjust color
Reset to factory settings
Extra Controls
Close Main Controls
Move selection then

### Language

-Language : multi-language( at least 5 language)

### Input

-Input signal selection

### Zoom

- Zoom

### Adjust horizontal

-Adjust position  
-Adjust size

### Adjust vertical

-Adjust position  
-Adjust size

### Adjust shape

-Adjust side curve  
Pincushion  
Balanced  
-Adjust side angles  
Trapezoid  
Parallelogram  
-Rotate image  
Rotate



## GENERAL PRODUCT SPECIFICATION



## Adjust color

- 9300°K for general use
- 6500°K for image management
- 5500°K for photoretouch
- User preset

## Reset to factory settings

- No
- Yes

## Extra Controls

- degauss
- Adjust moire

Horizontal  
Vertical

- Auto calibrate

## 3.3 Timing requirement

## 3.3.1 Mode storing capacity

Total modes available	: 50
(1) Factory preset modes	: 36
(2) User modes	: 14

## 3.3.2 Factory preset timings

The factory settings of size and centering are according to the reference timing charts ( see fig-8, fig-9 )



# GENERAL PRODUCT SPECIFICATION

55



MODE NO.	1	2	3	4
RESOLUTION	640 x 350	640 x 480	720 x 400	640 x 480
Dot clock(MHz)	25.175	25.175	28.321	31.500
f h	31.469 kHz	31.469 kHz	31.468 kHz	37.500 KHz
A ( us )	31.778	31.778	31.778	26.867
B ( us )	3.813	3.813	3.813	2.032
C ( us )	1.907	1.907	1.907	3.810
D ( us )	25.422	25.422	25.423	20.317
E ( us )	0.636	0.636	0.325	0.508
f v	70.087 Hz	59.941 Hz	70.084 Hz	75.000 Hz
O ( ms )	14.268	16.683	14.268	13.333
P ( ms )	0.064	0.064	0.064	0.080
Q ( ms )	1.907	1.049	1.112	0.427
R ( ms )	11.122	15.253	12.711	12.800
S ( ms )	1.175	0.317	0.382	0.026
SYNC. H/V	-/-	-/-	-/+	-/-
POLARITY				
SEP. SYNC	Y	Y	Y	Y

MODE NO.	5	6	7	8
RESOLUTION	640 x 480	640x350	800x600	720x400
Dot clock(MHz)	31.500	31.500	40.000	35.500
f h	37.861 kHz	37.861 kHz	37.879 kHz	37.927 kHz
A ( us )	26.413	26.413	26.400	26.366
B ( us )	1.270	2.032	3.200	2.028
C ( us )	3.810	3.048	2.200	3.042
D ( us )	20.317	20.317	20.000	20.282
E ( us )	1.016	1.016	1.000	1.014
f v	72.810 Hz	85.081 Hz	60.317Hz	85.039 Hz
O ( ms )	13.735	11.754	16.579	11.759
P ( ms )	0.079	0.079	0.106	0.079
Q ( ms )	0.528	1.585	0.607	1.107
R ( ms )	12.678	9.245	15.840	10.546
S ( ms )	0.45	0.845	0.026	0.027
SYNC. H/V	-/-	+/-	+ / +	- / +
POLARITY				
SEP. SYNC	Y	Y	Y	Y

# GENERAL PRODUCT SPECIFICATION

56

MODE NO.	9	10	11	12
RESOLUTION	640 x 480	800 x 600	800 x 600	1024 x 768
Dot clock(MHz)	36.000	49.500	50.000	65.000
f <sub>h</sub>	43.269 kHz	46.875 kHz	48.077 kHz	48.363 kHz
A (us)	23.111	21.333	20.800	20.677
B (us)	1.556	1.616	2.400	2.092
C (us)	2.222	3.232	1.280	2.462
D (us)	17.778	16.162	16.000	15.754
E (us)	1.555	0.323	1.12	0.369
f <sub>v</sub>	85.008 Hz	75.000 Hz	72.188 Hz	60.004 Hz
O (ms)	11.763	13.333	13.853	16.666
P (ms)	0.069	0.064	0.125	0.124
Q (ms)	0.578	0.448	0.478	0.600
R (ms)	11.093	12.800	12.480	15.880
S (ms)	0.023	0.021	0.77	0.062
SYNC. H/V	-/-	+/+	+/+	-/-
POLARITY				
SEP. SYNC	Y	Y	Y	Y

MODE NO.	13	14	15	16
RESOLUTION	832 x 624	640 x 480	800 x 600	1024 x 768
Dot clock(MHz)	57.280	40.500	56.250	75.000
f <sub>h</sub>	49.722 kHz	50.628 kHz	53.674 kHz	56.476 kHz
A (us)	20.110	19.752	18.631	17.707
B (us)	1.117	1.580	1.138	1.813
C (us)	3.910	1.975	2.702	1.920
D (us)	14.520	15.802	14.222	13.653
E (us)	0.583	0.395	0.569	0.321
f <sub>v</sub>	74.546 Hz	100.10 Hz	85.061 Hz	70.069 Hz
O (ms)	13.410	9.995	11.756	14.272
P (ms)	0.060	0.059	0.056	0.016
Q (ms)	0.784	0.435	0.503	0.513
R (ms)	12.550	9.481	11.179	13.599
S (ms)	0.016	0.020	0.018	0.054
SYNC. H/V	+/+	-/-	+/+	-/-
POLARITY				
SEP. SYNC	Y	Y	Y	Y

# GENERAL PRODUCT SPECIFICATION

57

MODE NO.	17	18	19	20
RESOLUTION	1280 x 960	1024 x 768	800 x 600	1280 x 1024
Dot clock(MHz)	108.000	78.750	67.500	108.000
f <sub>h</sub>	60.000 kHz	60.023 kHz	63.923 kHz	63.981 kHz
A (us)	16.667	16.660	15.644	15.630
B (us)	1.037	1.219	0.948	1.037
C (us)	2.889	2.235	2.370	2.296
D (us)	11.852	13.003	11.852	11.852
E (us)	0.889	0.203	0.474	0.445
f <sub>v</sub>	60.000 Hz	75.029 Hz	100.00 Hz	60.020 Hz
O (ms)	16.667	13.328	9.997	16.661
P (ms)	0.050	0.050	0.047	0.047
Q (ms)	0.600	0.466	0.548	0.594
R (ms)	16.000	12.795	9.387	16.005
S (ms)	0.017	0.017	0.015	0.015
SYNC. H/V	+/+	+/+	+/+	+/+
POLARITY				
SEP. SYNC	Y	Y	Y	Y

MODE NO.	21	22	23	24
RESOLUTION	1152 x 864	1024 x 768	1152 x 870	1152 x 900
Dot clock(MHz)	108.000	94.500	100.000	108.000
f <sub>h</sub>	67.500 kHz	68.877 kHz	68.681 kHz	71.809 kHz
A (us)	14.815	14.561	14.560	13.926
B (us)	1.185	1.016	1.280	0.593
C (us)	2.370	2.201	1.440	2.519
D (us)	10.667	10.836	11.520	10.667
E (us)	0.593	0.508	0.32	0.147
f <sub>v</sub>	75.000 Hz	84.997 Hz	74.979 Hz	76.150 Hz
O (ms)	13.333	11.765	13.333	13.132
P (ms)	0.044	0.044	0.044	0.111
Q (ms)	0.474	0.524	0.568	0.460
R (ms)	12.800	11.183	12.678	12.533
S (ms)	0.015	0.014	0.043	0.028
SYNC. H/V	+/+	+/+	-/-	+/+
POLARITY				
SEP. SYNC	Y	Y	Y	Y

## GENERAL PRODUCT SPECIFICATION

MODE NO.	25	26	27	28
RESOLUTION	1600 x 1200	1280 x 1024	1600 x 1200	1792 x 1344
Dot clock(MHz)	162.000	135.00	175.500	204.750
f <sub>h</sub>	75.000 kHz	79.976 kHz	81.250 kHz	83.640 kHz
A (us)	13.333	12.504	12.308	11.956
B (us)	1.185	1.067	1.094	0.977
C (us)	1.877	1.837	1.732	1.602
D (us)	9.877	9.481	9.117	8.752
E (us)	0.394	0.119	0.365	0.625
f <sub>v</sub>	60.000 Hz	75.024 Hz	65.000 Hz	59.999 Hz
O (ms)	16.667	13.329	15.385	16.667
P (ms)	0.040	0.038	0.037	0.036
Q (ms)	0.613	0.475	0.566	0.550
R (ms)	16.000	12.804	14.769	16.069
S (ms)	0.014	0.012	0.013	0.012
SYNC. H/V	+ / +	+ / +	+ / +	+ / +
POLARITY				
SEP. SYNC	Y	Y	Y	Y

MODE NO.	29	30	31	32
RESOLUTION	1280 x 960	1856 x 1392	1600 x 1200	1920 x 1440
Dot clock(MHz)	148.500	218.250	189.000	234.000
f <sub>h</sub>	85.938 kHz	86.333 kHz	87.500 kHz	90.000 kHz
A (us)	11.636	11.583	11.429	11.111
B (us)	1.077	1.026	1.016	0.889
C (us)	1.508	1.489	1.608	1.470
D (us)	8.620	8.504	8.466	8.205
E (us)	0.431	0.564	0.339	0.547
f <sub>v</sub>	85.002 Hz	59.995 Hz	70.000 Hz	60.000 Hz
O (ms)	11.764	16.668	14.286	16.667
P (ms)	0.035	0.035	0.034	0.033
Q (ms)	0.547	0.498	0.526	0.622
R (ms)	11.171	16.124	13.715	16.000
S (ms)	0.011	0.011	0.011	0.012
SYNC. H/V	+ / +	+ / +	+ / +	+ / +
POLARITY				
SEP. SYNC	Y	Y	Y	Y

# GENERAL PRODUCT SPECIFICATION

59

MODE NO.	33	34	35	36
RESOLUTION	1280 x 1024	1600 x 1200	1600 x 1200	1792 x 1344
Dot clock(MHz)	157.500	202.500	229.500	261.000
f h	91.146 kHz	93.750 kHz	106.250 kHz	106.270 kHz
A ( us )	10.971	10.667	9.412	9.410
B ( us )	1.016	0.948	0.837	0.828
C ( us )	1.422	1.501	1.325	1.349
D ( us )	8.127	7.901	6.972	6.866
E ( us )	0.406	0.317	0.278	0.367
f v	85.024 Hz	75.000 Hz	85.000 Hz	74.997 Hz
O (ms)	11.761	13.334	11.765	13.334
P (ms)	0.033	0.032	0.028	0.028
Q (ms)	0.483	0.491	0.433	0.649
R (ms)	11.234	12.800	11.294	12.647
S (ms)	0.011	0.011	0.01	0.01
SYNC. H/V	+ / +	+ / +	+ / +	+ / +
POLARITY				
SEP. SYNC	Y	Y	Y	Y

## GENERAL PRODUCT SPECIFICATION



## 3.3.3 Horizontal scanning

Sync polarity : Positive or Negative  
 Scanning frequency : 30 - 107 KHz  
 Retrace time : 1.87  $\mu$ sec

## 3.3.4 Vertical scanning

Sync polarity : Positive or Negative  
 Scanning frequency : 50 - 160 Hz

## 3.4 Power input connection

Power cord length : 1.5 M  
 Power cord type : 3 leads detachable power cord with protective earth plug.

## 3.5 Video amplifiers

Rise time/Fall time : 4.0 / 4.5 ns  
 (excluding rise/fall time due to test pattern & test probe)  
 Overshoot/undershoot : Max. 12%  
 Black level shift : Max. 3%  
 Sag : Max. 5%

## 3.6 Degaussing

An automatic degaussing circuit is provided and requires no intervention  
 The degaussing is activated at the time of switch-on and power saving  
 wake up or switch-on again after switched-off for longer than 30 minutes  
 Manual degaussing is provided to eliminate any color impurity.

## 3.7 Requirement for low emission

TCO

- (1) Electrostatic :  $\pm 0.5$  KV  
 potential  
 (2) Alternating Elec. field

ELF 5 - 2 KHz :  $\approx 10.0$  V/M  
 VLF 2 - 400 KHz :  $\approx 1.0$  V/M

## (3) Magnetic field

ELF 5 - 2 KHz :  $\approx 200$  nT  
 VLF 2 - 400 KHz :  $\approx 25$  nT



## 3.8 Power management

The power consumption and the status indication of the set with power management function are as follows,

<u>STATUS</u>	<u>Horizontal</u>	<u>Vertical</u>	<u>Power Spec</u>	<u>LED</u>
On	Pulse	Pulse	as normal on	Green
Stand-by	No Pulse	Pulse	< 8 W	Yellow
Suspend	Pulse	No Pulse	< 8 W	Yellow
Power off	No Pulse	No Pulse	< 3 W	Amber

Entering from ON state to Power saving state must has 5 - 10 second time delay. It must awake from Suspend state to On state within 3 seconds.

According to VESA power saving signalling.  
TCO95 power saving requirement  
EPA energy star requirement

## 3.9 Display identification

In accordance with VESA Display Channel Standard V1.0 and having DDC 1 and DDC 2B capability

## 3.10 Customax (option)

The Customax provides the following control and adjustment capability, detailed please see the document "Software for your monitor".

1. Screen geometry control: H-size, V-size, H-shift, V-shift, Tilt, Parallelogram, Trapezoid, Symmetry, Pincushion, background pattern, etc.
2. Image quality control: Color temperature, etc.
3. Monitor behavior control: Setting reset, Power saver, Color reset, etc.
4. Information on current settings
5. Preferences

## GENERAL PRODUCT SPECIFICATION

## 4.0 Visual characteristics

## 4.1 Test conditions

Unless otherwise specified, this specification is defined under the following conditions.

- (1) Input signal: As defined in 3.3, 1280 x 768 non-interlaced mode (68.7 KHz), signal sources must have 75 ohm output impedance.
- (2) Lumhance setting: controls to be set to 20 ft-lb with full screen 100 % duty cycle white signal.
- (3) Warm up: more than 30 minutes after power on with signal supplied.
- (4) Ambient light: 400-- 600 lux.
- (5) Ambient temperature:  $20 \pm 5^{\circ} \text{C}$
- (6) Ambient magnetic field: no special ambient magnetic field existed.  
(the ac leakage flux, dc flux caused by transformer magnet, etc.)
- (7) CRT face: East

## 4.2 Resolution

Inspection modes ( 7 modes ) :

Mode	Resolution	H. freq. / V. freq	Standard
1.	1024 x 768	60.023KHz/75.029Hz	(VESA/75)
2.	1024 x 768	68.677KHz/84.997Hz	(VESA/85)
3.	1280 x 1024	79.976KHz/75.024Hz	(VESA/75)
4.	1280 x 1024	91.146KHz/85.024Hz	(VESA/85)
5.	1600 x 1200	93.75KHz/75.000Hz	(VESA/75)
6.	1600 x 1200	106.25KHz/85.000Hz	(VESA/85)
7.	1792 x 1344	106.3KHz/75.000Hz	(VESA/75)

## 4.3 Brightness

Color Temp	Brightness control	Contrast control	White Square (see fig-5)	Full white
	MIN	MIN	0 FL	0 FL
	CENTER	MIN	< 0.1 FL	< 0.1 FL
@9300°K	CENTER	MAX	? 30 FL	
@6500°K	CENTER	MAX	? 26 FL	
@5500°K	CENTER	MAX	? 23 FL	
@9300°K	MAX	MAX		? 30 FL

## 4.4 Flagwaving- jitter

less than 0.15 mm

## 4.5 Image size

### 4.5.1 Actual display size

The dimensions of the data area, measured along the picture center of horizontal and vertical axis of the screen, are listed below: (see Fig 1)

(392 ± 3 mm) X (294 ± 3 mm)

### 4.5.2 Max scan size

Maximum active video size should be not smaller than mask opening. The mask opening is 406.4 x 304.8 mm.

## 4.6 Image centering deviation

| A-B | and | C-D | = 6 mm, please see Fig 2

## 4.7 Picture shift range

H-shift range : total > 30 mm.

V-shift range : total > 15 mm.

## 4.8 Display dimension stability

Due to brightness : 1.0 %

Due to aging : 1.0 %

Due to mains voltage : 1.0 %

Dynamic : < 1mm

## 4.9 Geometric distortions

Pincushion, trapezoid, parallelogram, rotation and other various distortions must remain within the limits to tolerance as in Fig. 4.

top/ bottom/left/ right : 2.5 mm Max.

top plus bottom / left plus right : 3.5 mm Max.

waviness : 1.0mm/ 50mm Max.

slope change (Max) : one

## GENERAL PRODUCT SPECIFICATION

- 4.10 Picture tilt  
 $\pm 1\text{mm}$  (see Fig. 3)  
 User adjust range for tilt : 1 deg. min.

- 4.11 Image non-linearity

Horizontal:

$$\frac{\text{Max.} - \text{Min.}}{\text{Max.} + \text{Min.}} \times 100 \% = 8 \% \quad (30 - 31.5\text{KHz})$$

$$= 7 \% \quad (31.5 - 64 \text{ KHz})$$

$$= 5 \% \quad (64 - 107 \text{ KHz})$$

$$\text{For any two adjacent blocks} = 5 \% \quad (30 - 31.5 \text{ KHz})$$

$$= 4 \% \quad (31.5 - 64 \text{ KHz})$$

$$= 3 \% \quad (64 - 107 \text{ KHz})$$

$$\text{Vertical :} = 5 \%$$

$$\text{For any two adjacent blocks} = 3 \%$$

- 4.12 Misconvergence

The maximum convergence error should be measured on a white line and represents the maximum distance between the center of the red, green and blue lines over the whole image area.

Max. misconception : 0.15 mm in C zone (see Fig.6)  
 0.30 mm in A zone  
 0.40 mm in B zone

- 4.13 Focus check

First, adjust brightness to 50 % position and contrast to max., and then generate "a" characters for 1024 lines to cover entire picture area (picture size is shown in sect. 4.5). Characters should be clearly identified at the center and all corners. Character size is shown in Fig. 7.

- 4.14 Brightness uniformity

With an active video area full white pattern adjusted to 20 - 22 foot lamberts, no portion of the pattern shall be less than 75 % of the luminance measured at the CRT center.

After a warm-up time of 30 min., no colored stains may occur in white, red, green and blue patterns. (the set should be well degaussed).

## GENERAL PRODUCT SPECIFICATION

## 5.0 Mechanical characteristics

## 5.1 Controls

- Front side :
- AC power switch
  - OSD function key
- Rear :
- D-sub / BNC Selection switch
  - Power cord socket
  - USB devices

## 5.2 Unit dimension / Weight

Set dimension (incl. pedestal) : 482(W) x 477(H) x 467(D) mm  
 Net weight : 24 Kg

## 5.3 Tilt and swivel base

The display should be equipped with a tilt & swivel device allowing rotation over an angle of 90 degree left or rightward and for a tilt of -5 degree to +15 degree with respect to the horizontal position.

## 5.4 Transportation packages

## 5.4.1 Shipping dimension/Weight

Carton dimension : 557(W) x 627(H) x 596(D) mm  
 Gross weight : 28 Kg

## 5.4.2 Block unit / Palletization

<u>layers/block</u>	<u>sets/layer</u>	<u>sets/block unit</u>
3	4	12

<u>blocks/container</u>
<u>20 feet</u> <u>40 feet</u>
8            20

## 6.0 Environmental characteristics

The following sections define the interference and susceptibility condition limits that might occur between external environment and the display device.

## 6.1 Susceptibility of display to external environment

### Operating

- Temperature : 0 to 40 degree C
- Humidity : 10 to 90% (w/o condensation)
- Altitude : 10,000 ft

### Storage

- Temperature : -40 to 60 degree C
- Humidity : 5 to 95% (w/o condensation)
- Altitude : 40,000 ft
- Condensation : should be prevented

## 6.2 Transportation tests

Standard		European version	USA version
Drop Test	Height	50 cm	NSTA 45 cm
	Sequence	1 corner 3 faces	1 corner 3 edge 6 face
	Test Result	electrical function ok mechanical function ok no serious damage on set appearance (room temp./10°C, humidity 70 %)	
Vibration Test	Sequence	7 Hz 1.05 G 30 min. for each axis	5-100-5 Hz 0.5 G 15 min. for each axis
	Test Result	electrical function ok mechanical function ok no serious damage on set appearance	
Bump Test	For design evaluation only operating 10 G, 16 msec, 1000 cycles, z - axes pulse : half sine temperature : 23 °C humidity : 60 % air pressure : 100 kpa (according to DSD draft standard UAN-D636)		



## GENERAL PRODUCT SPECIFICATION

6.3 Display disturbances from external environment  
According to IEC 801-2 for ESD disturbances

6.4 Display disturbances to external environment

6.4.1 Ionizatic radiation  
Completely fulfilled International Commission of  
Radiological Protection (ICRP) requirement 0.5 mR/hrs.

6.4.2 EMI  
EMI : FCC PART 15 class B, D.O.C. Class B  
: VFG 243/91 (Class B)  
: CISPER 22(Class B)  
: VCCI (Class II)  
: CE mark

7.0 Reliability

7.1 Mean Time Between Failures  
MTBF to be calculated according to military standard MIL - HDBK - 217C.  
MTBF > = 75,000 hrs (excluding CRT )

$$\text{Practice of MTBF} = \frac{\text{Total hrs (power on) x Total sets}}{\text{NO. of failed sets}}$$

8.0 Quality assurance requirements

8.1 Acceptance test  
according to MIL-STD-105D Control II level

AQL : 0.65 (major)  
2.50 (minor)  
(please also refer to annual quality agreement)  
Customer acceptance criteria : UAW0377/00

9.0 Serviceability  
The serviceability of this monitor should fulfill the  
requirements which are prescribed in UAW - 0346 and must  
be checked with the check list UAT - 0361.


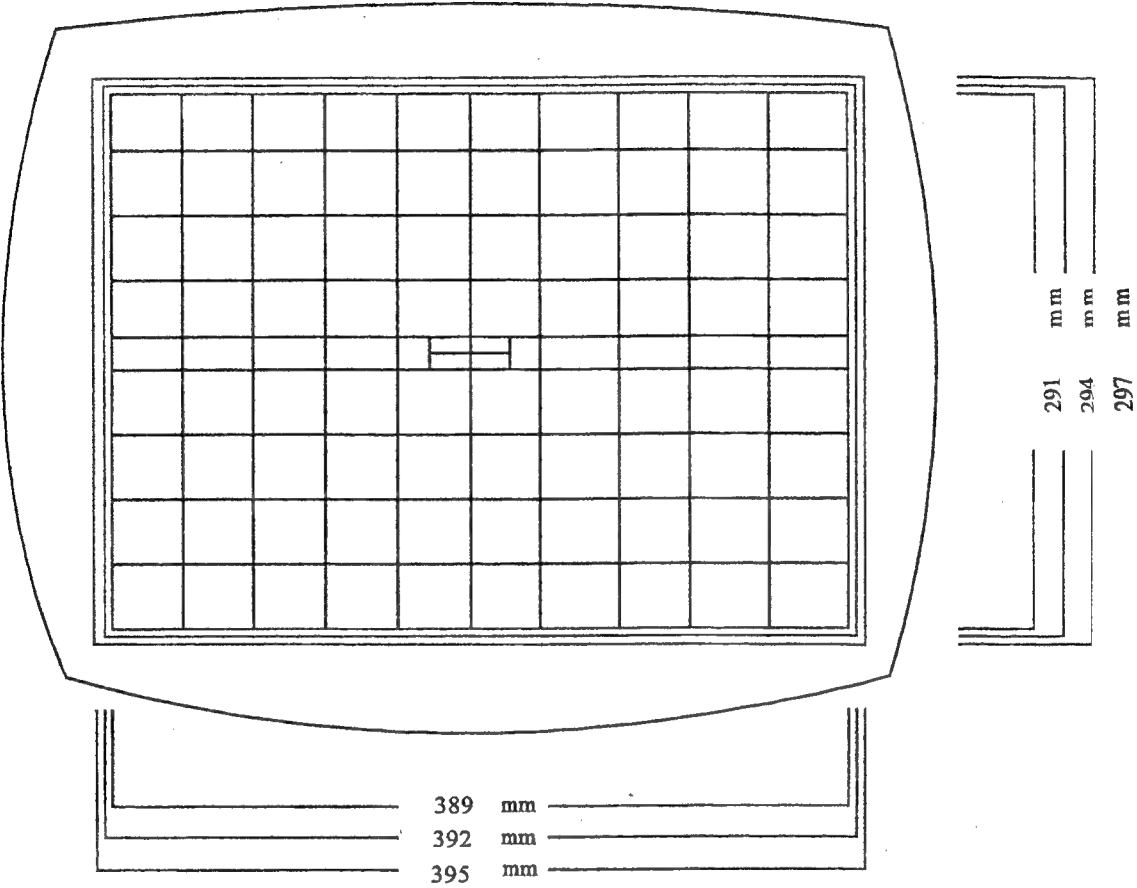


FIG-1 IMAGE DIMENSION

## GENERAL PRODUCT SPECIFICATION

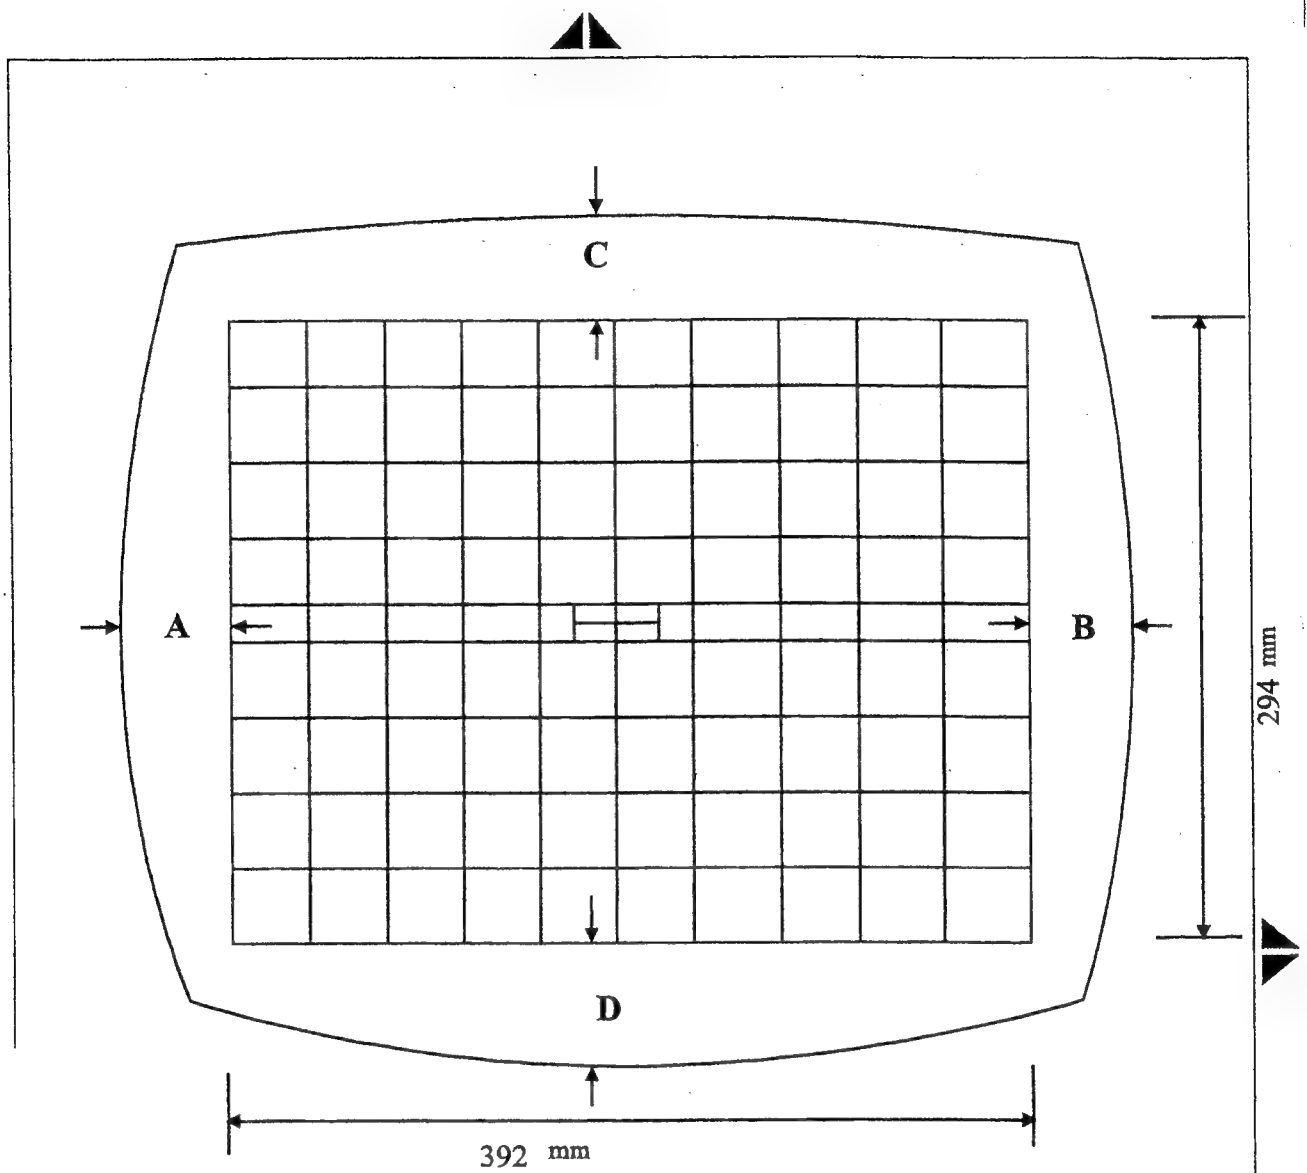

$$|A-B| \text{ AND } |C-D| < 6 \text{ mm}$$

FIG-2 IMAGE CENTERING


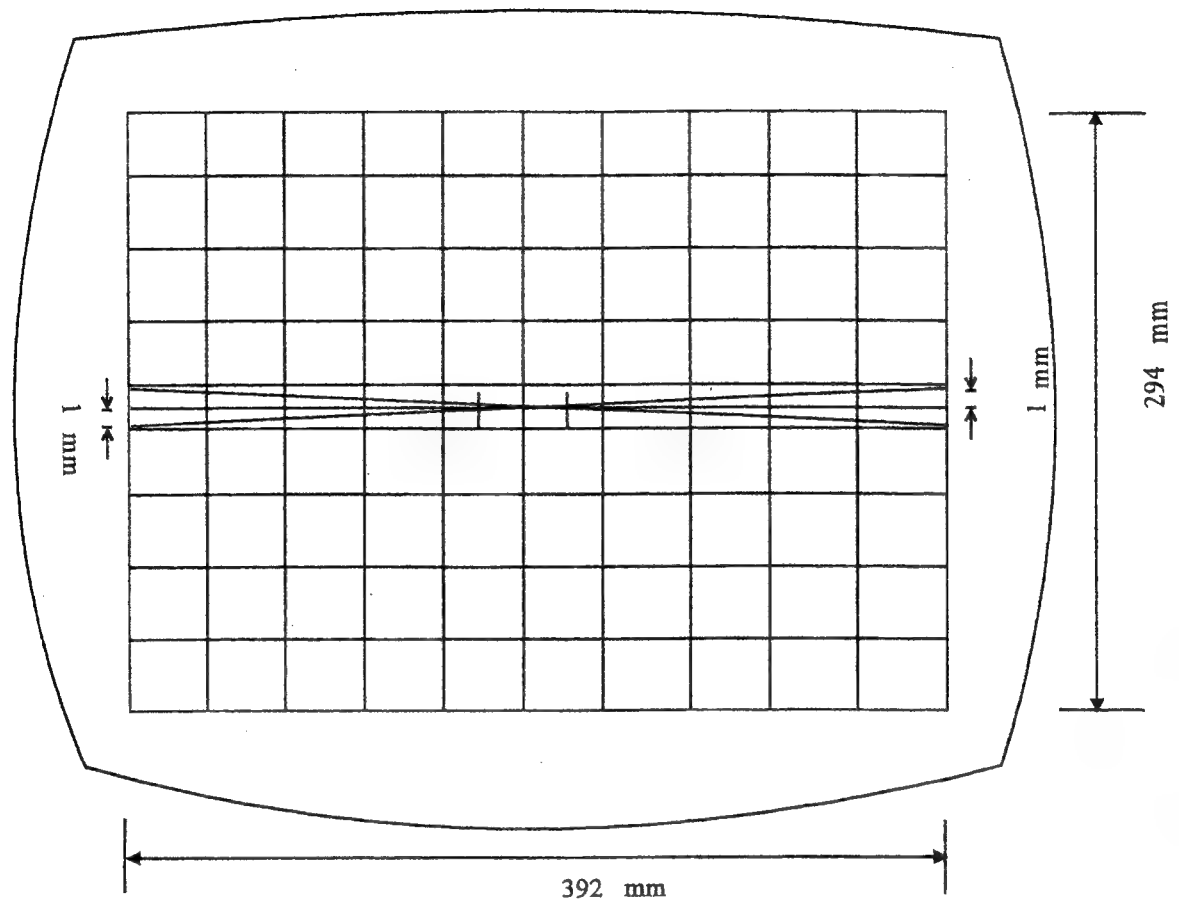



FIG-3 IMAGE ROTATION

## GENERAL PRODUCT SPECIFICATION

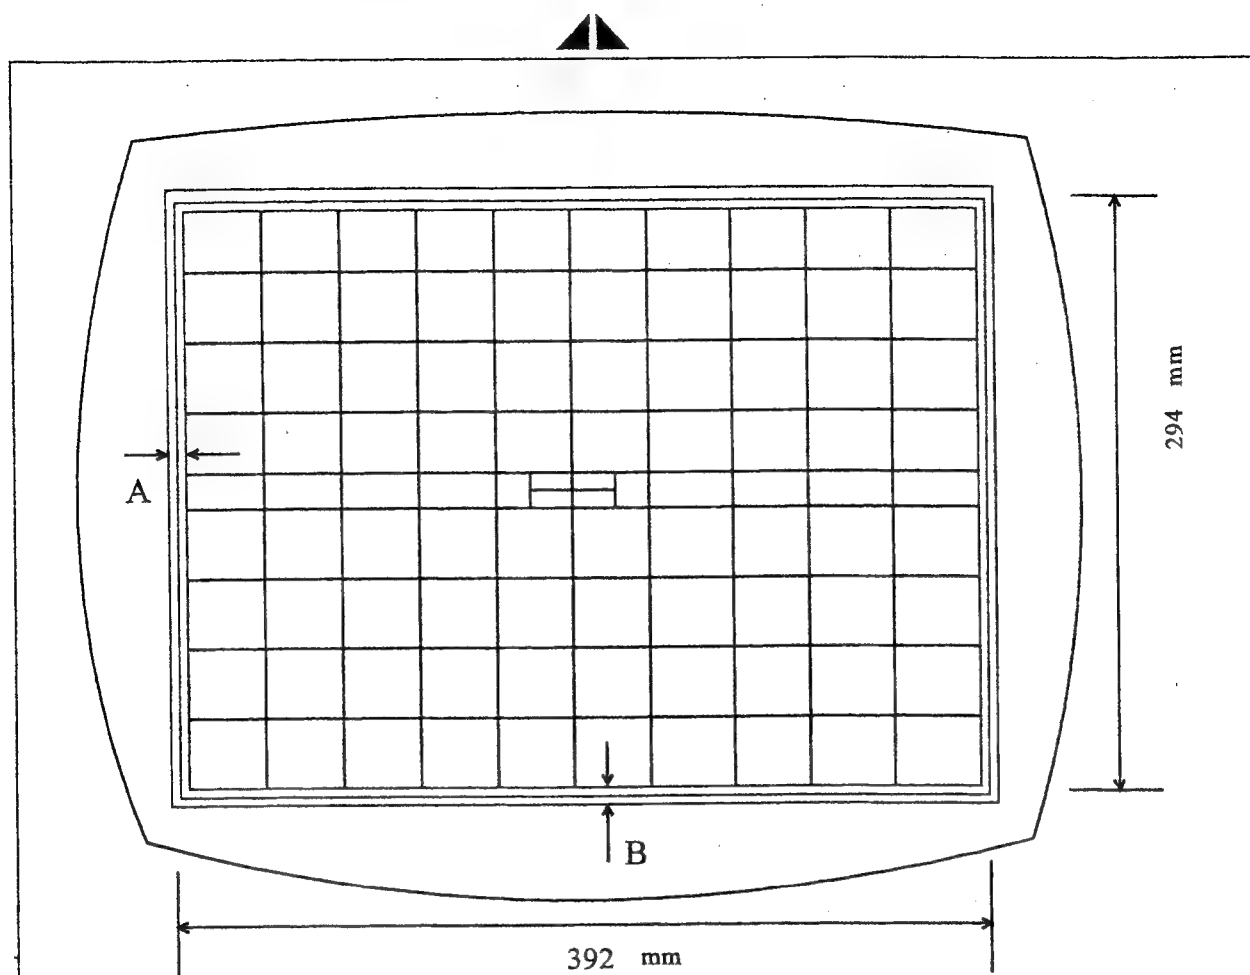

$$A = B = 2.5 \text{ mm}$$

FIG-4 IMAGE GEOMETRY

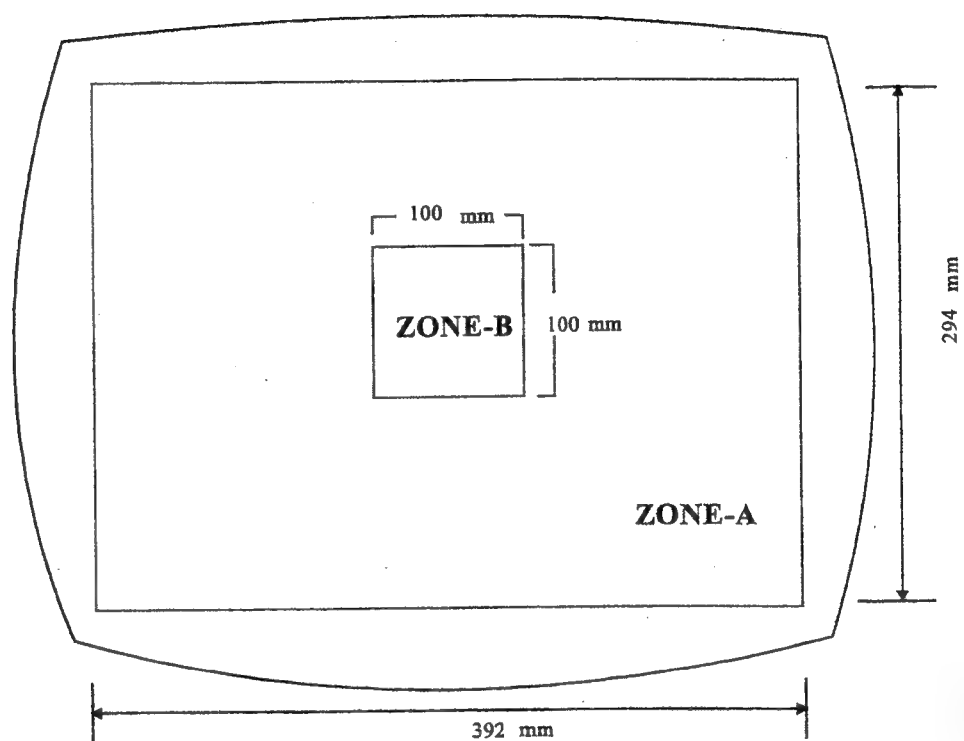

**FIG-5 BRIGHTNESS AND CONTRAST  
MEASUREMENT AREA**

## GENERAL PRODUCT SPECIFICATION

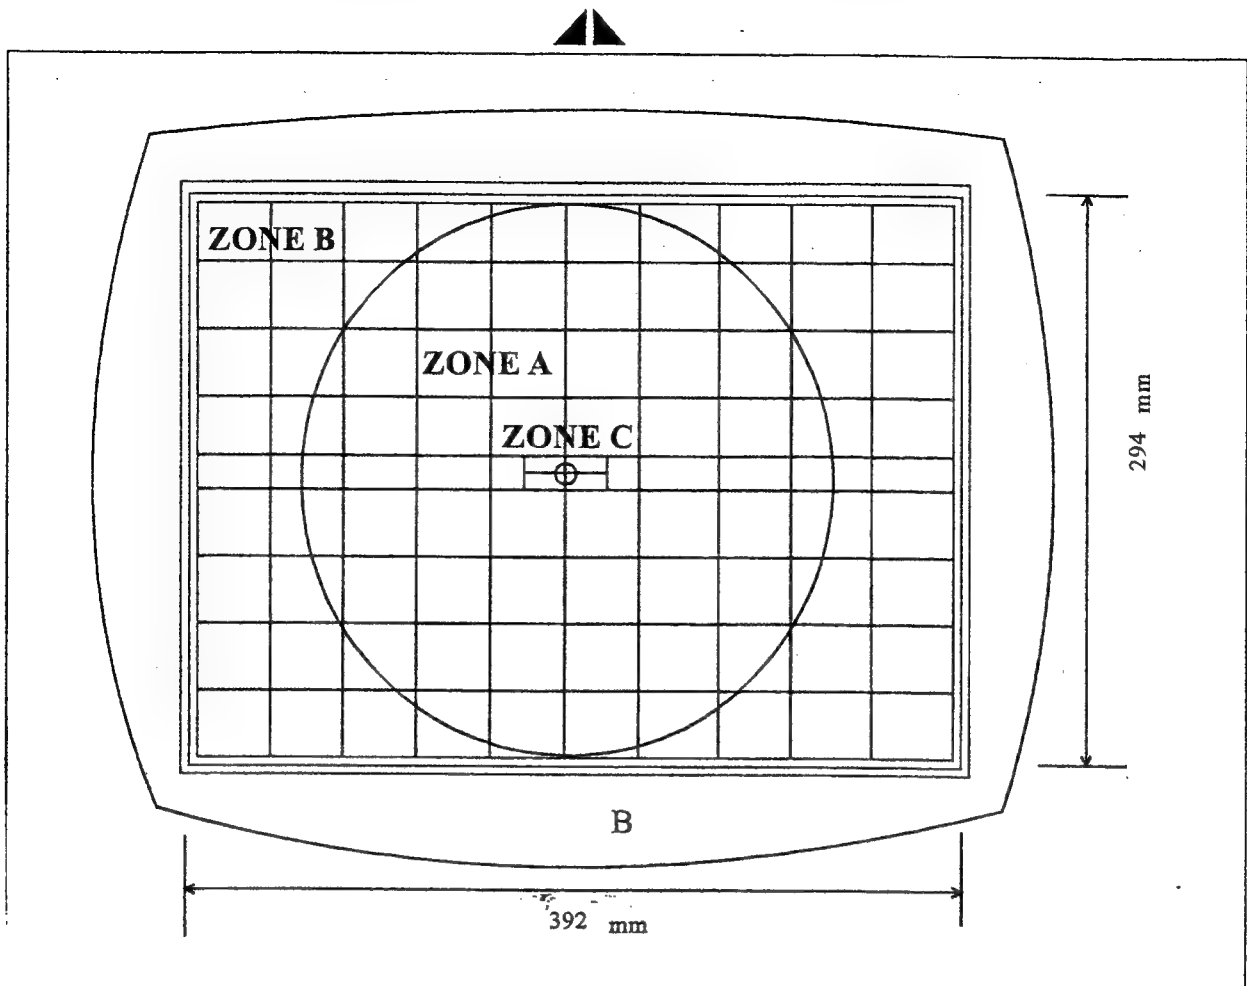


FIG-6 MISCONVERGENCE



1 BYTE = 8BITS

LINE	HEX.DATA	7	6	5	4	3	2	1	0
0	0	0							
1	0	0							
2	3	C							
3	4	2							
4	4	2							
5	5	E							
6	5	2							
7	5	2							
8	5	C							
9	4	0							
A	3	C							
B	0	0							
C	0	0							
D	0	0							
E	0	0							
F	0	0							

Fig 7 CHARACTER FORMAT FOR FOCUS CHECK

## GENERAL PRODUCT SPECIFICATION

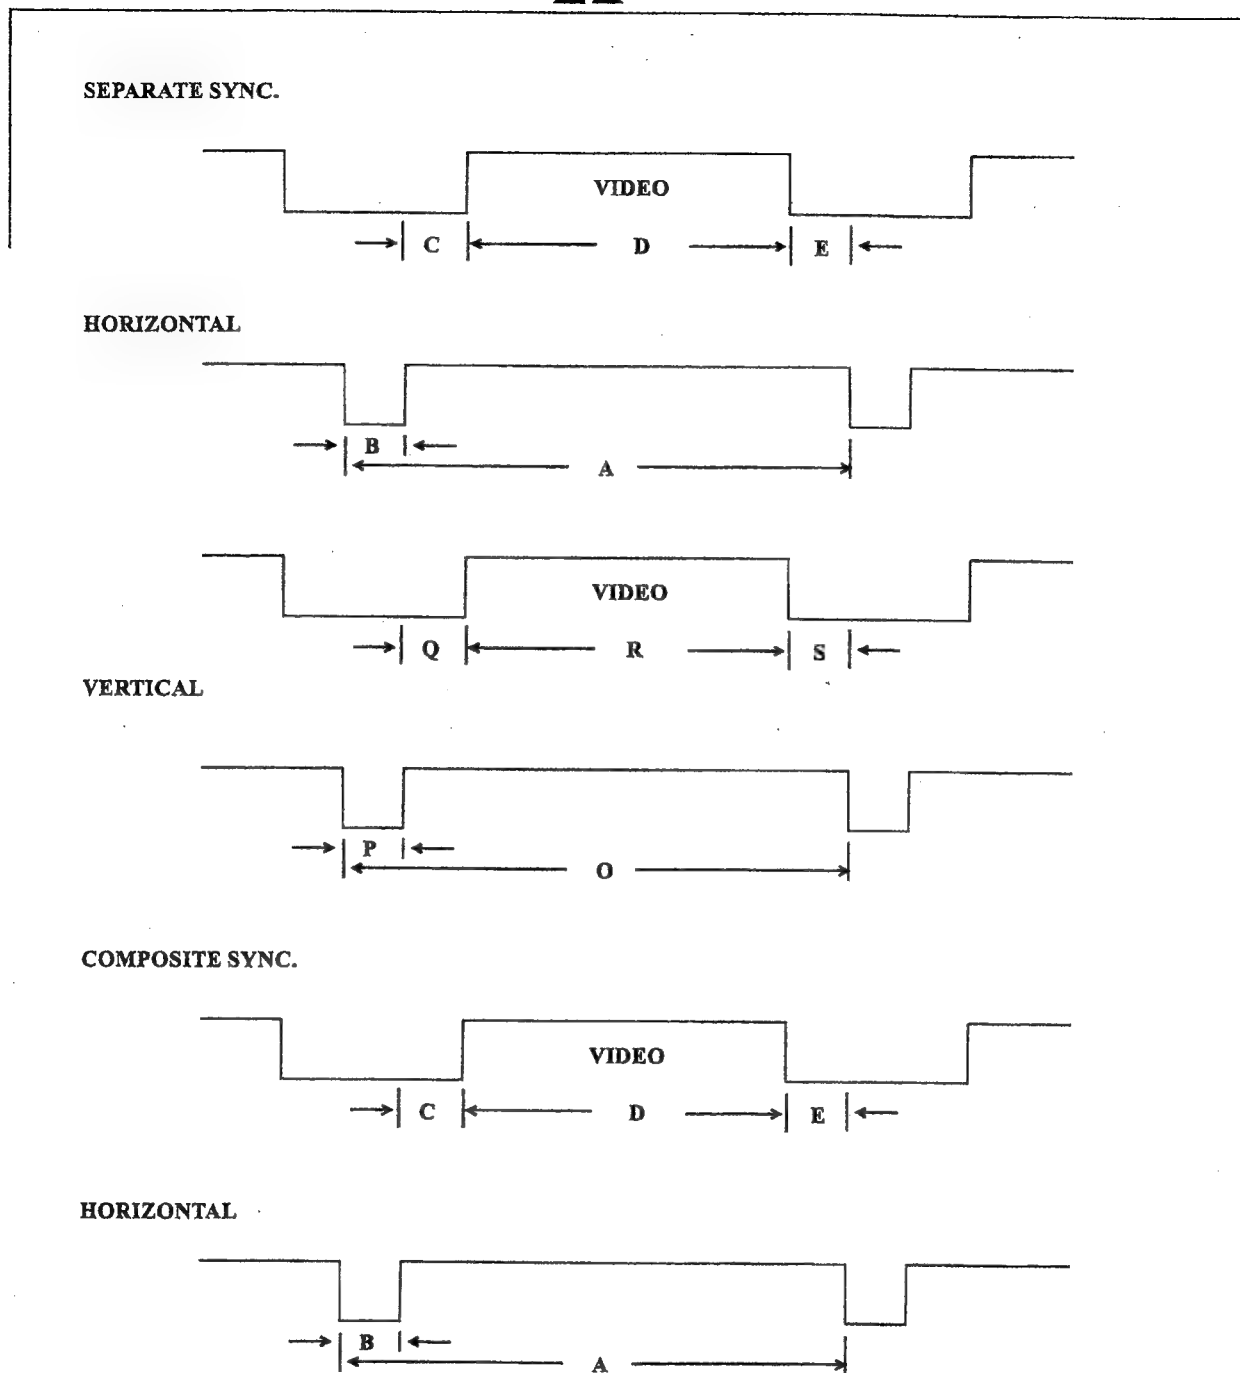


FIG-8 TIMING CHART -1


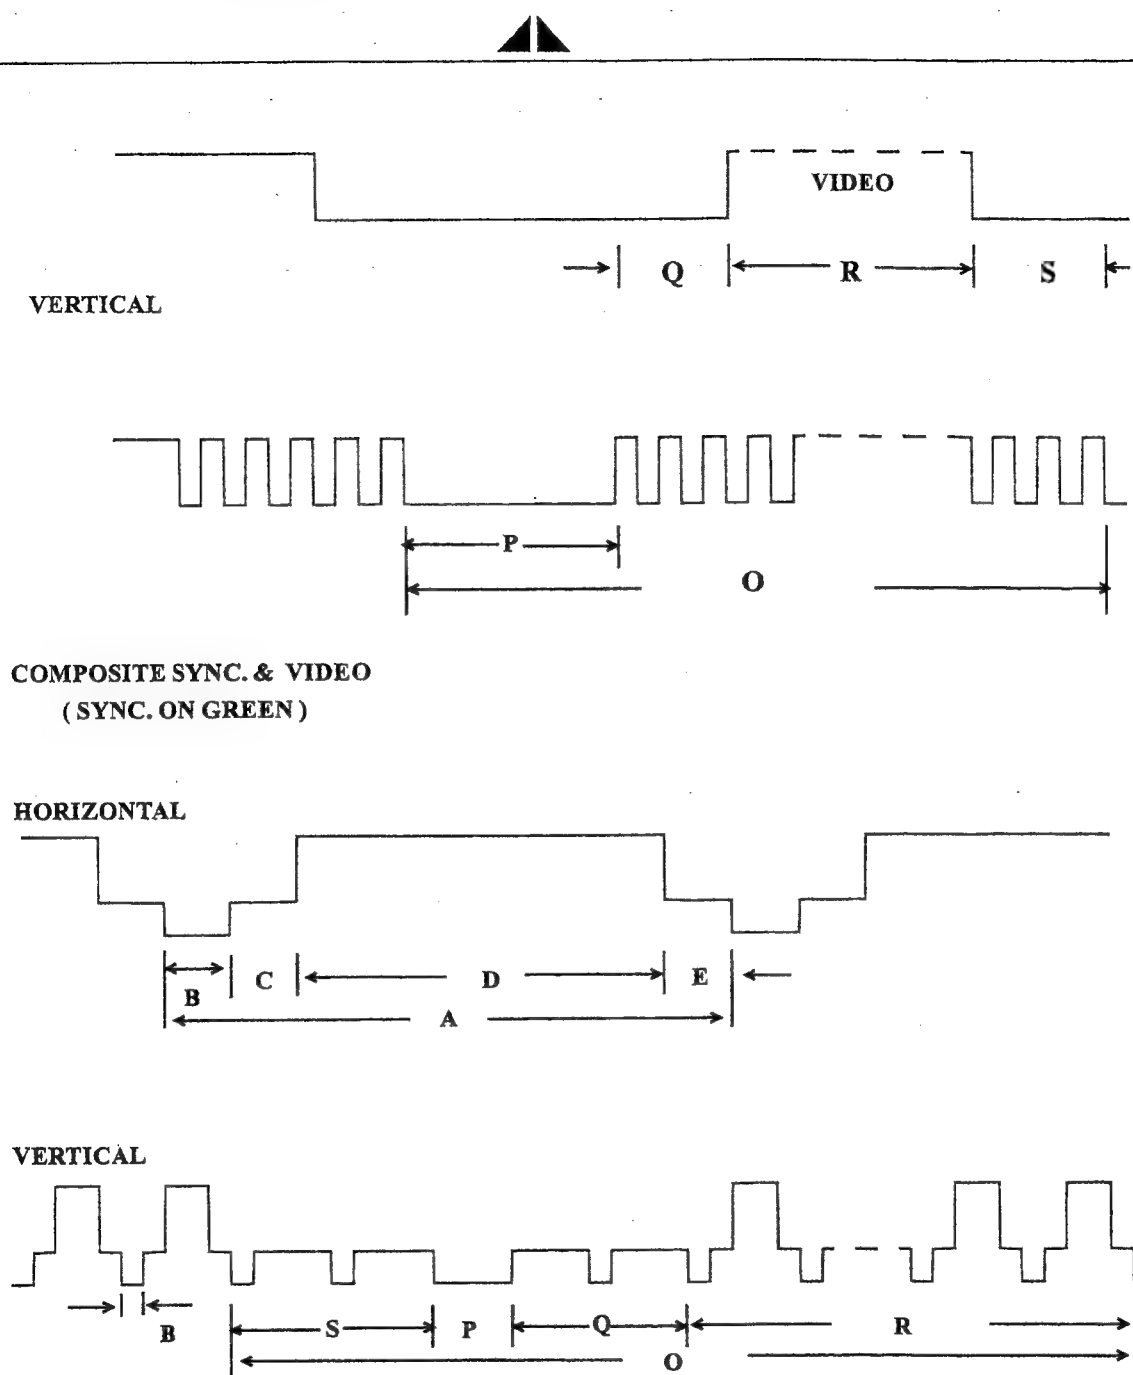


FIG-9 TIMING CHART -2


## Repair Flow Chart

## A. Power Supply Failure

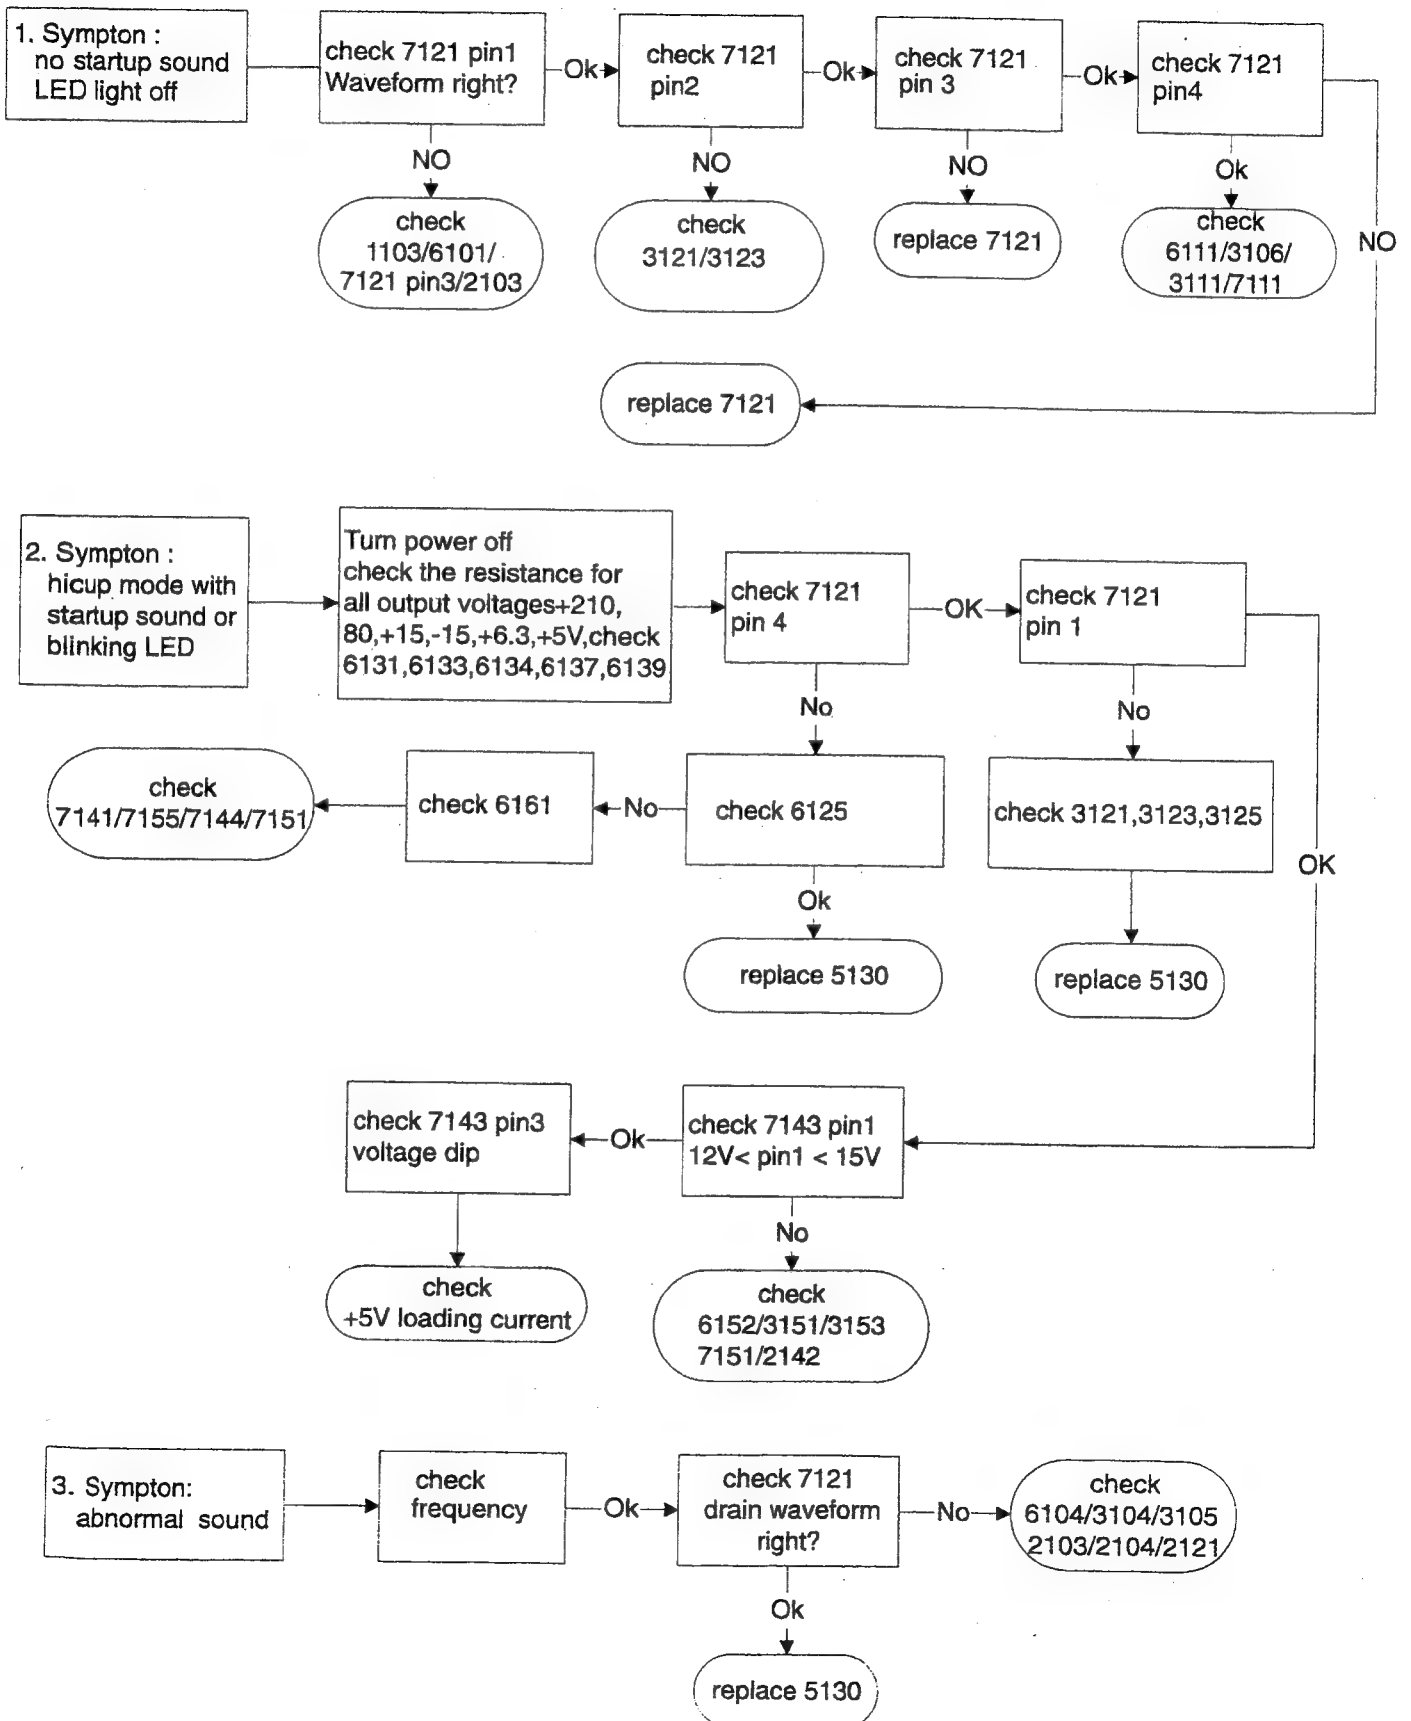


# Repair Flow Chart

79

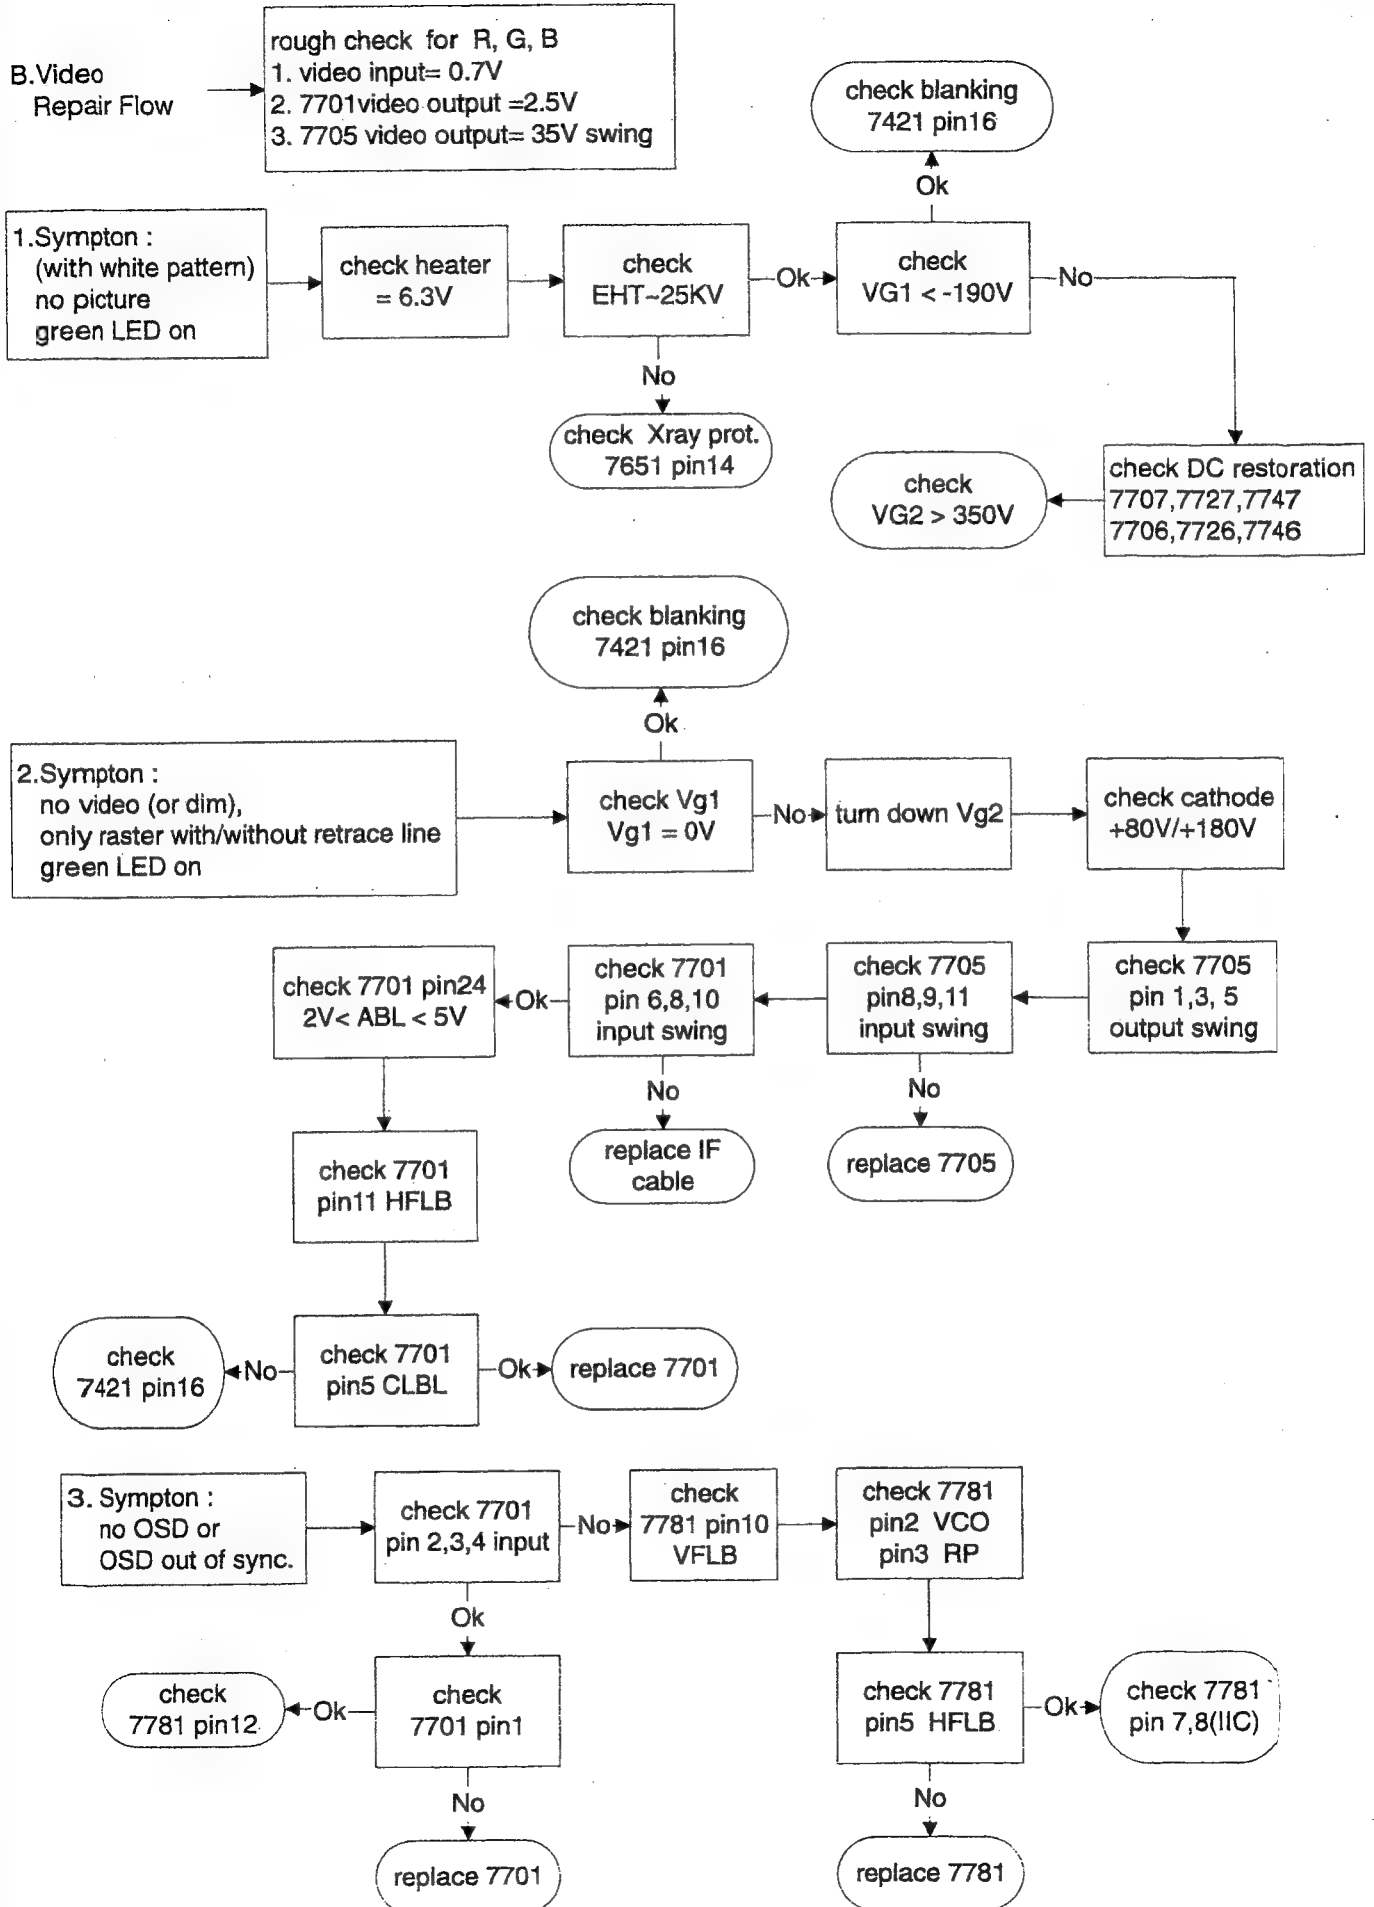


## Repair Flow Chart

C. Horizontal deflection  
output repair flow :





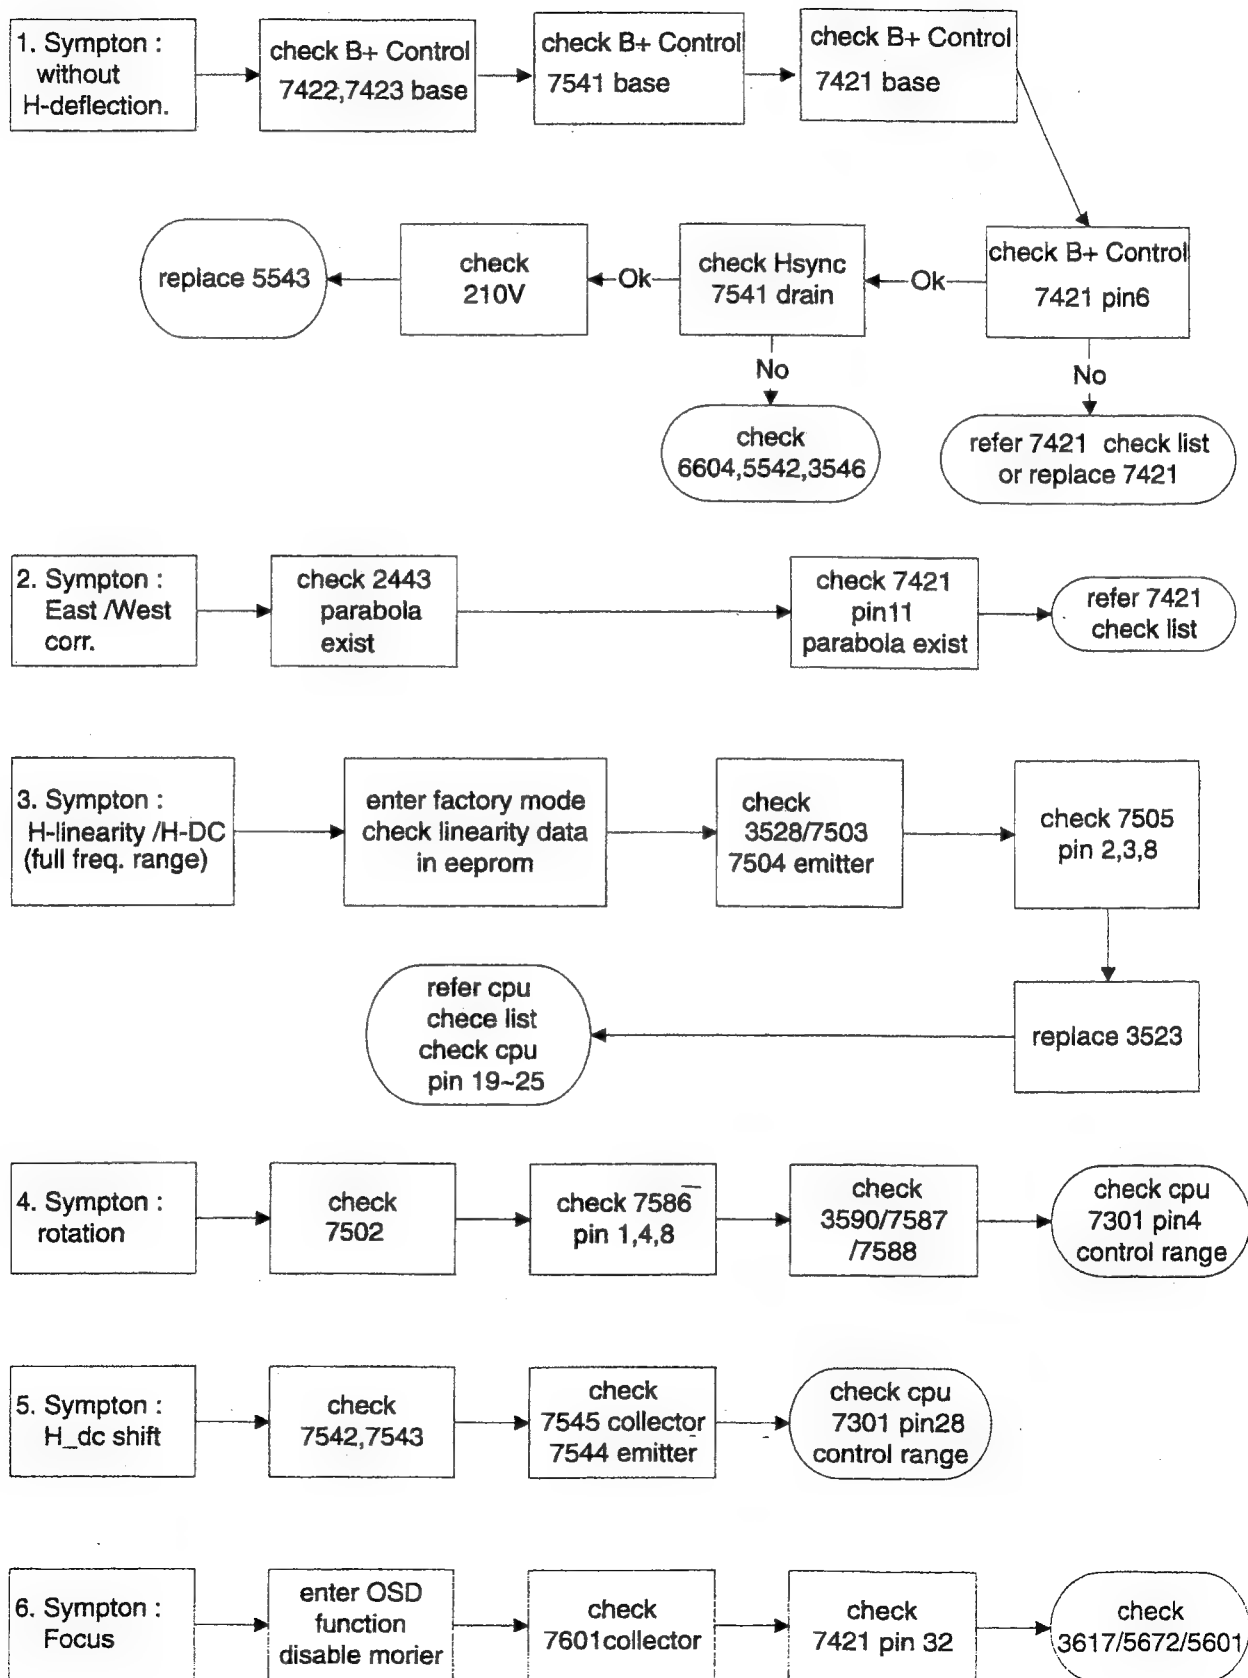


## D. Vertical Deflection Failure



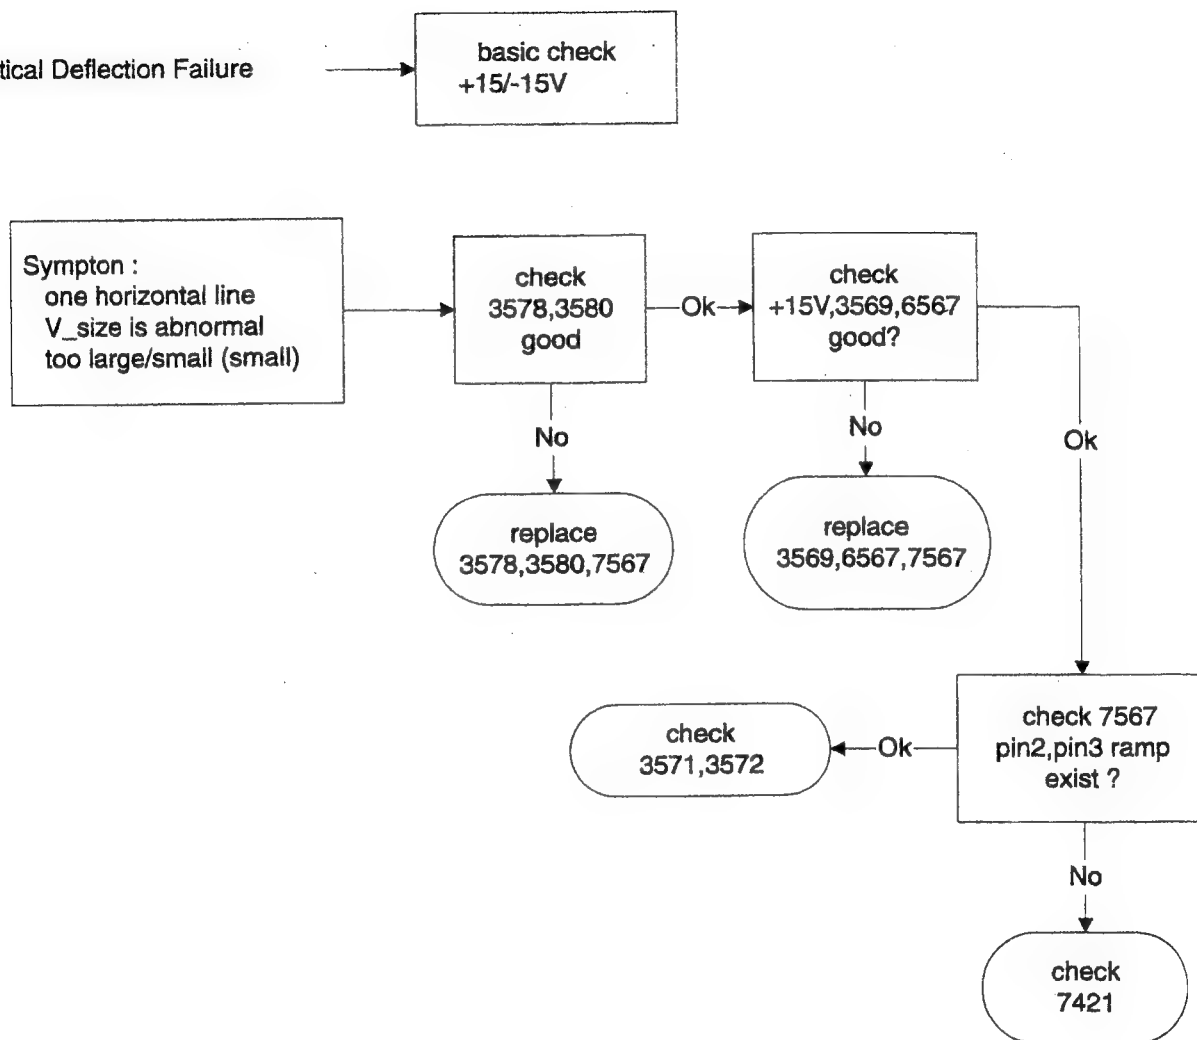




## Repair Flow Chart

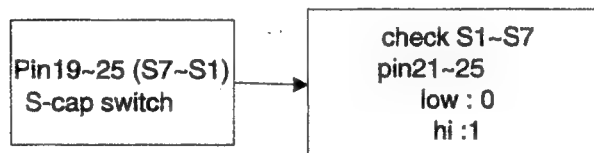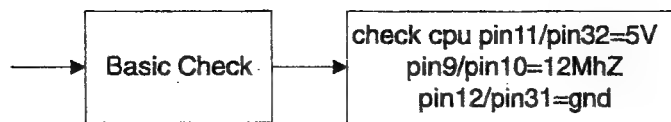
E. CPU  
check list

Fh-khz	S1	S2	S3	S4	S5
<-33.00	1	1	1	1	1
33.0 ~36.0	1	1	0	0	0
36.0 ~ 42.0	1	0	0	1	0
42.0 ~45.0	0	1	1	0	1
45.0 ~47.5	0	1	0	1	1
47.5 ~52.0	0	1	0	0	1
52.0 ~55.0	0	1	0	0	0
55.0 ~61.5	0	0	1	1	0
61.5 ~65.0	0	0	0	1	1
65.0 ~70.0	0	0	1	0	0
70.0 ~77.0	0	0	0	1	1
77.0 ~83.0	0	0	0	1	0
83.0 ~95.0	0	0	0	0	1
95.0-<	0	0	0	0	0

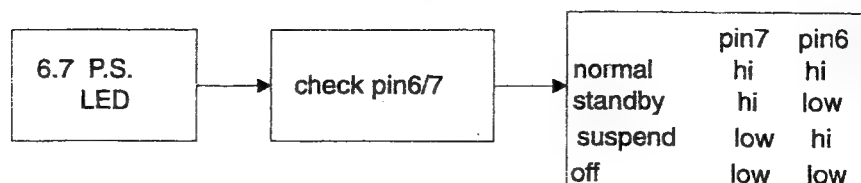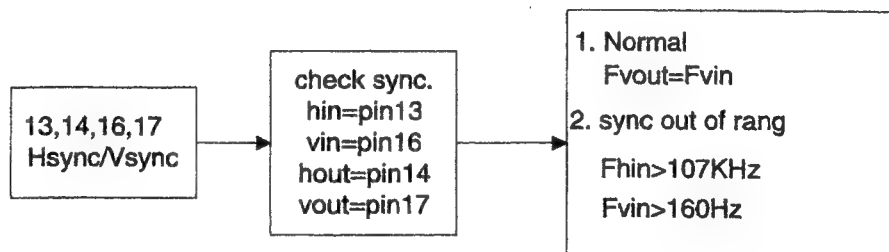


## Repair Flow Chart

83

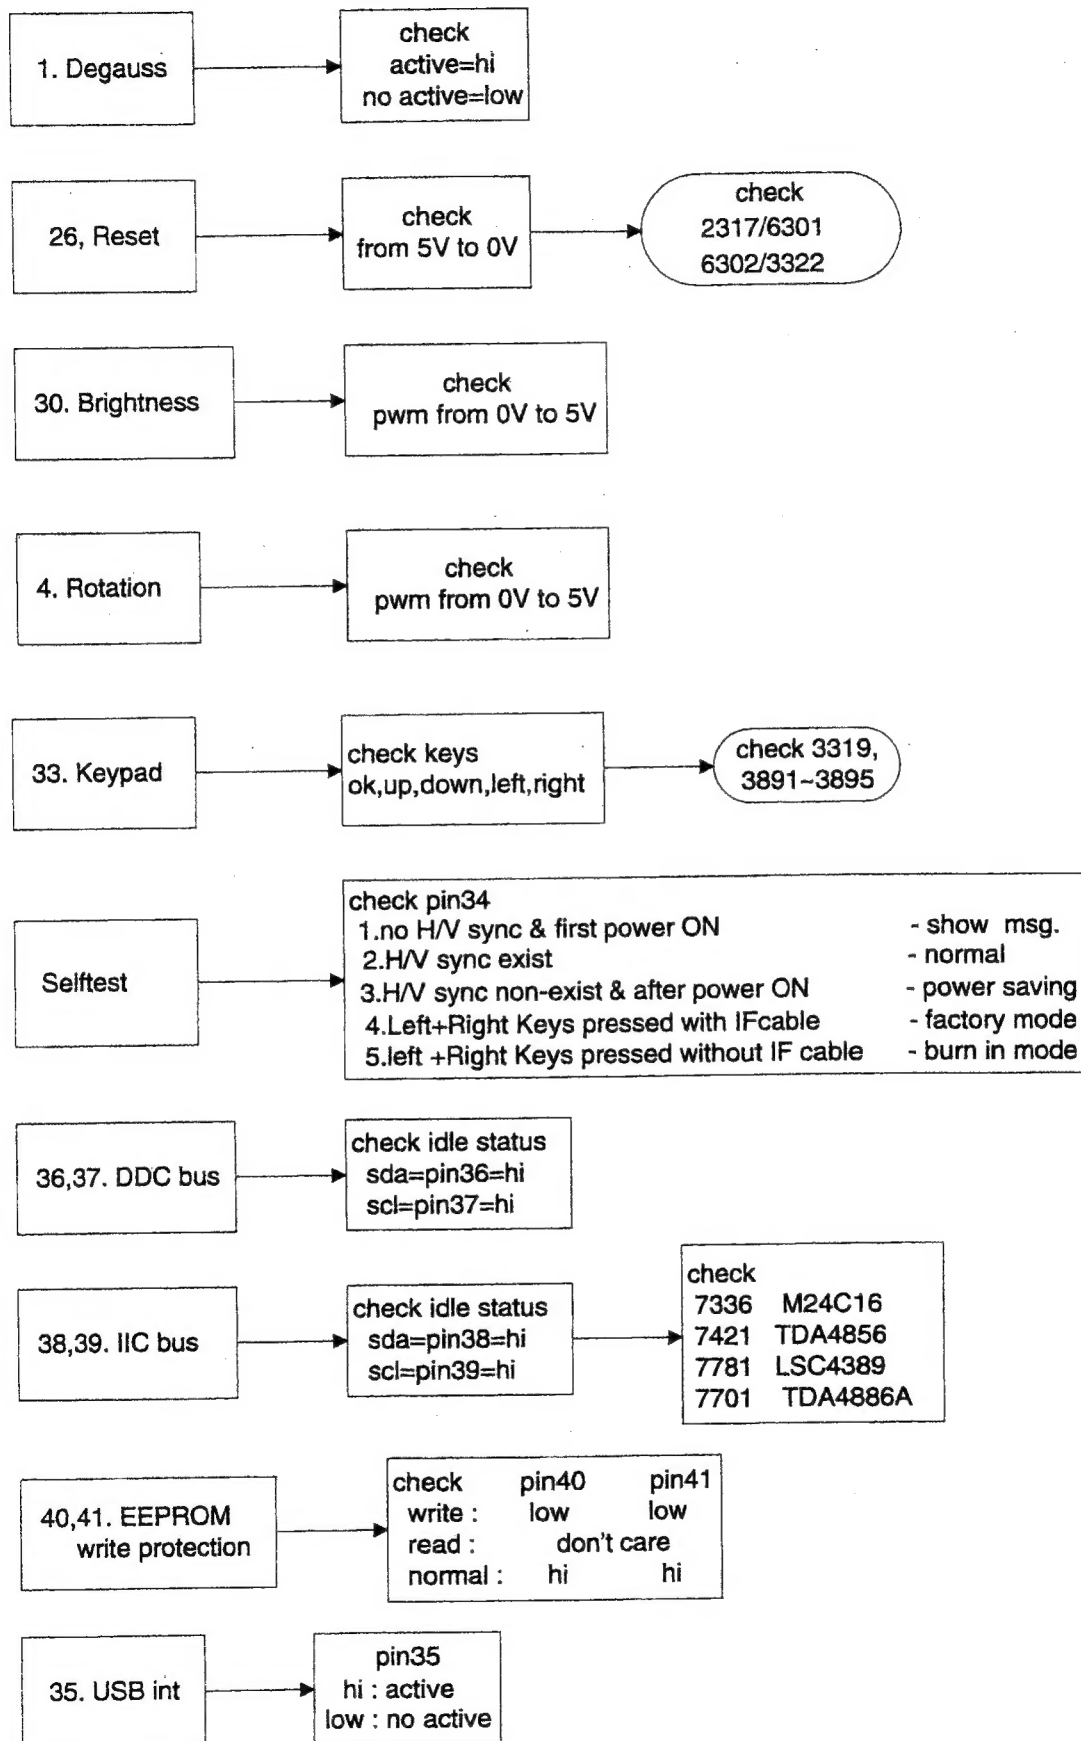


## Repair Flow Chart

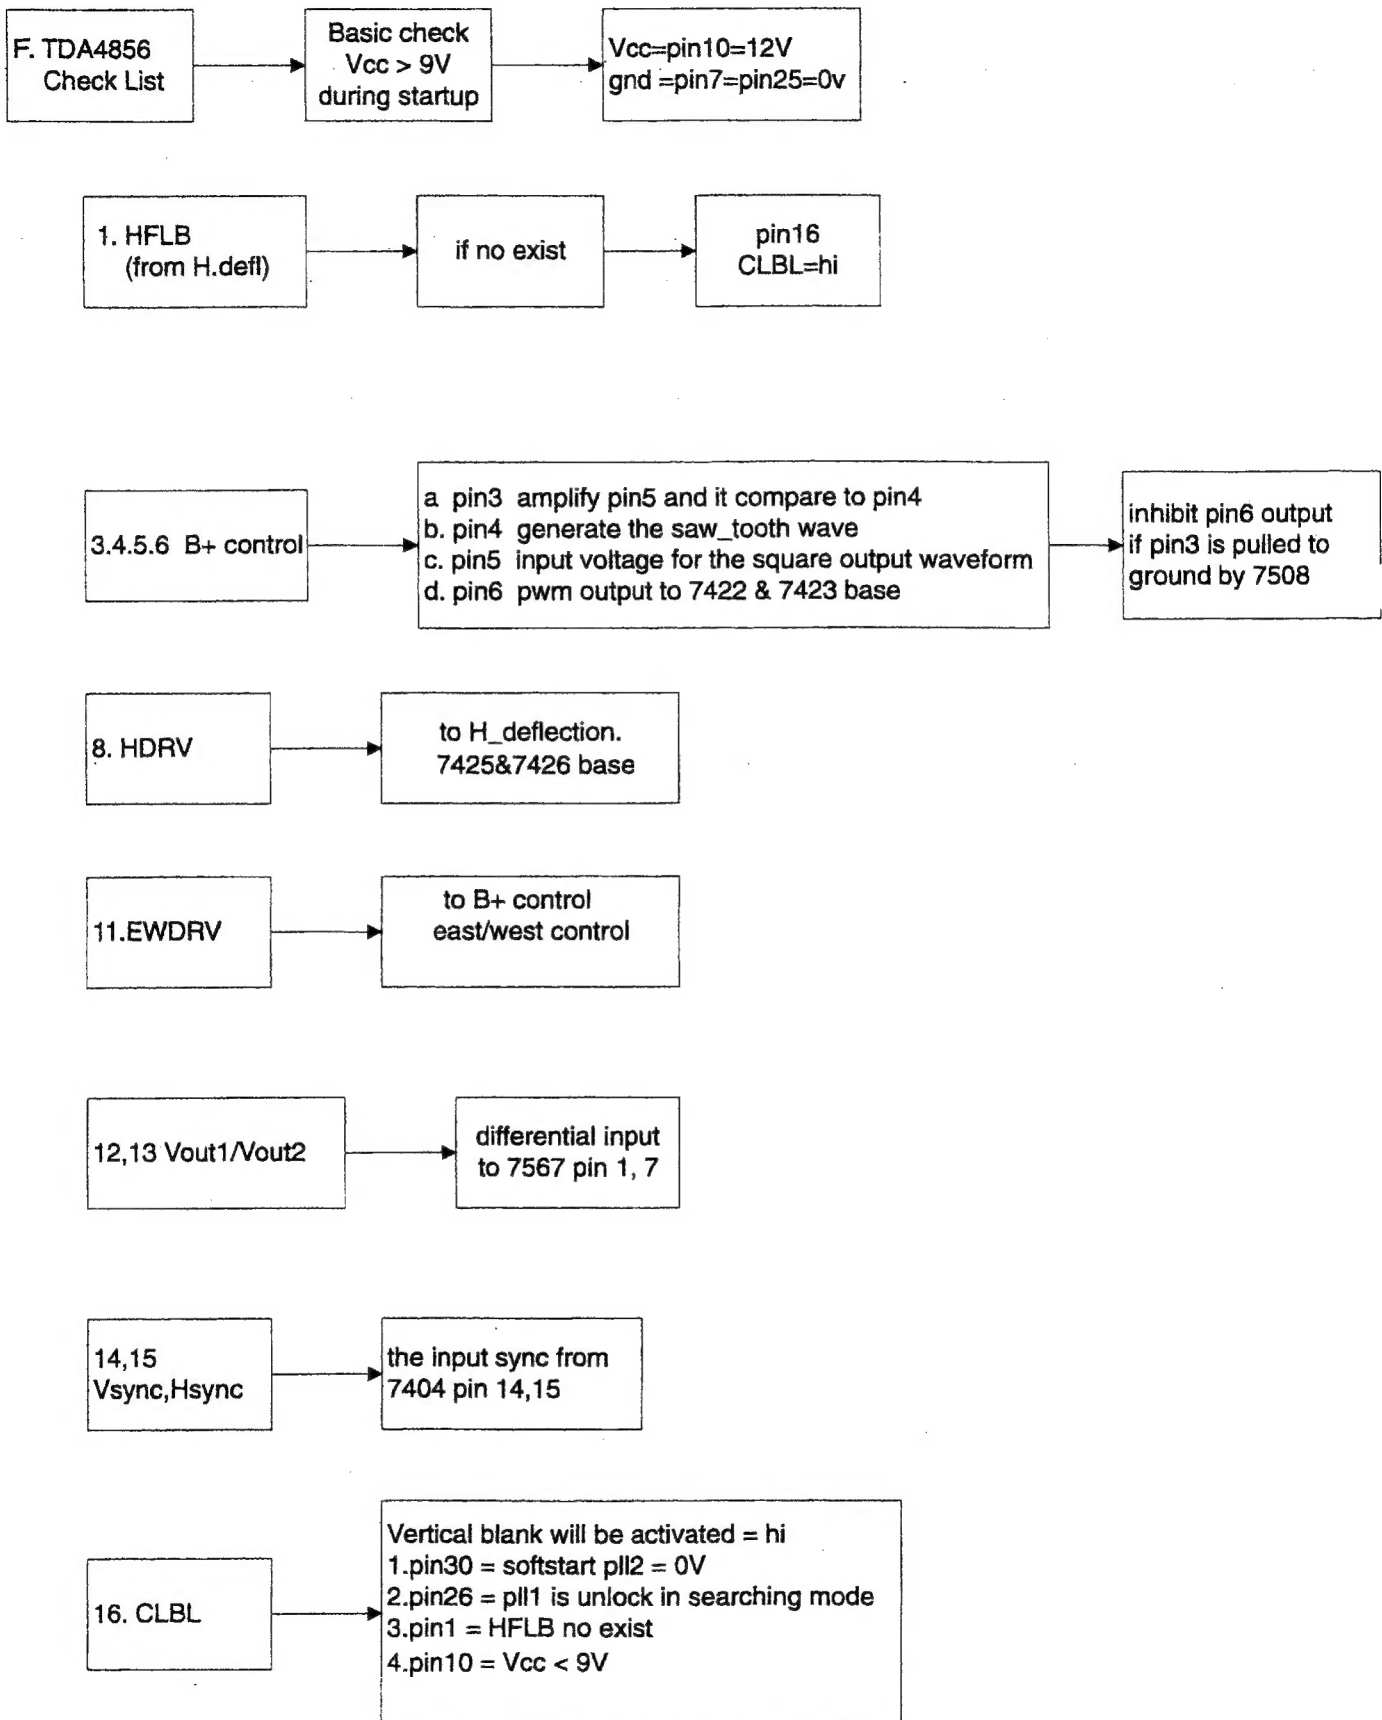

## Repair Flow Chart

85

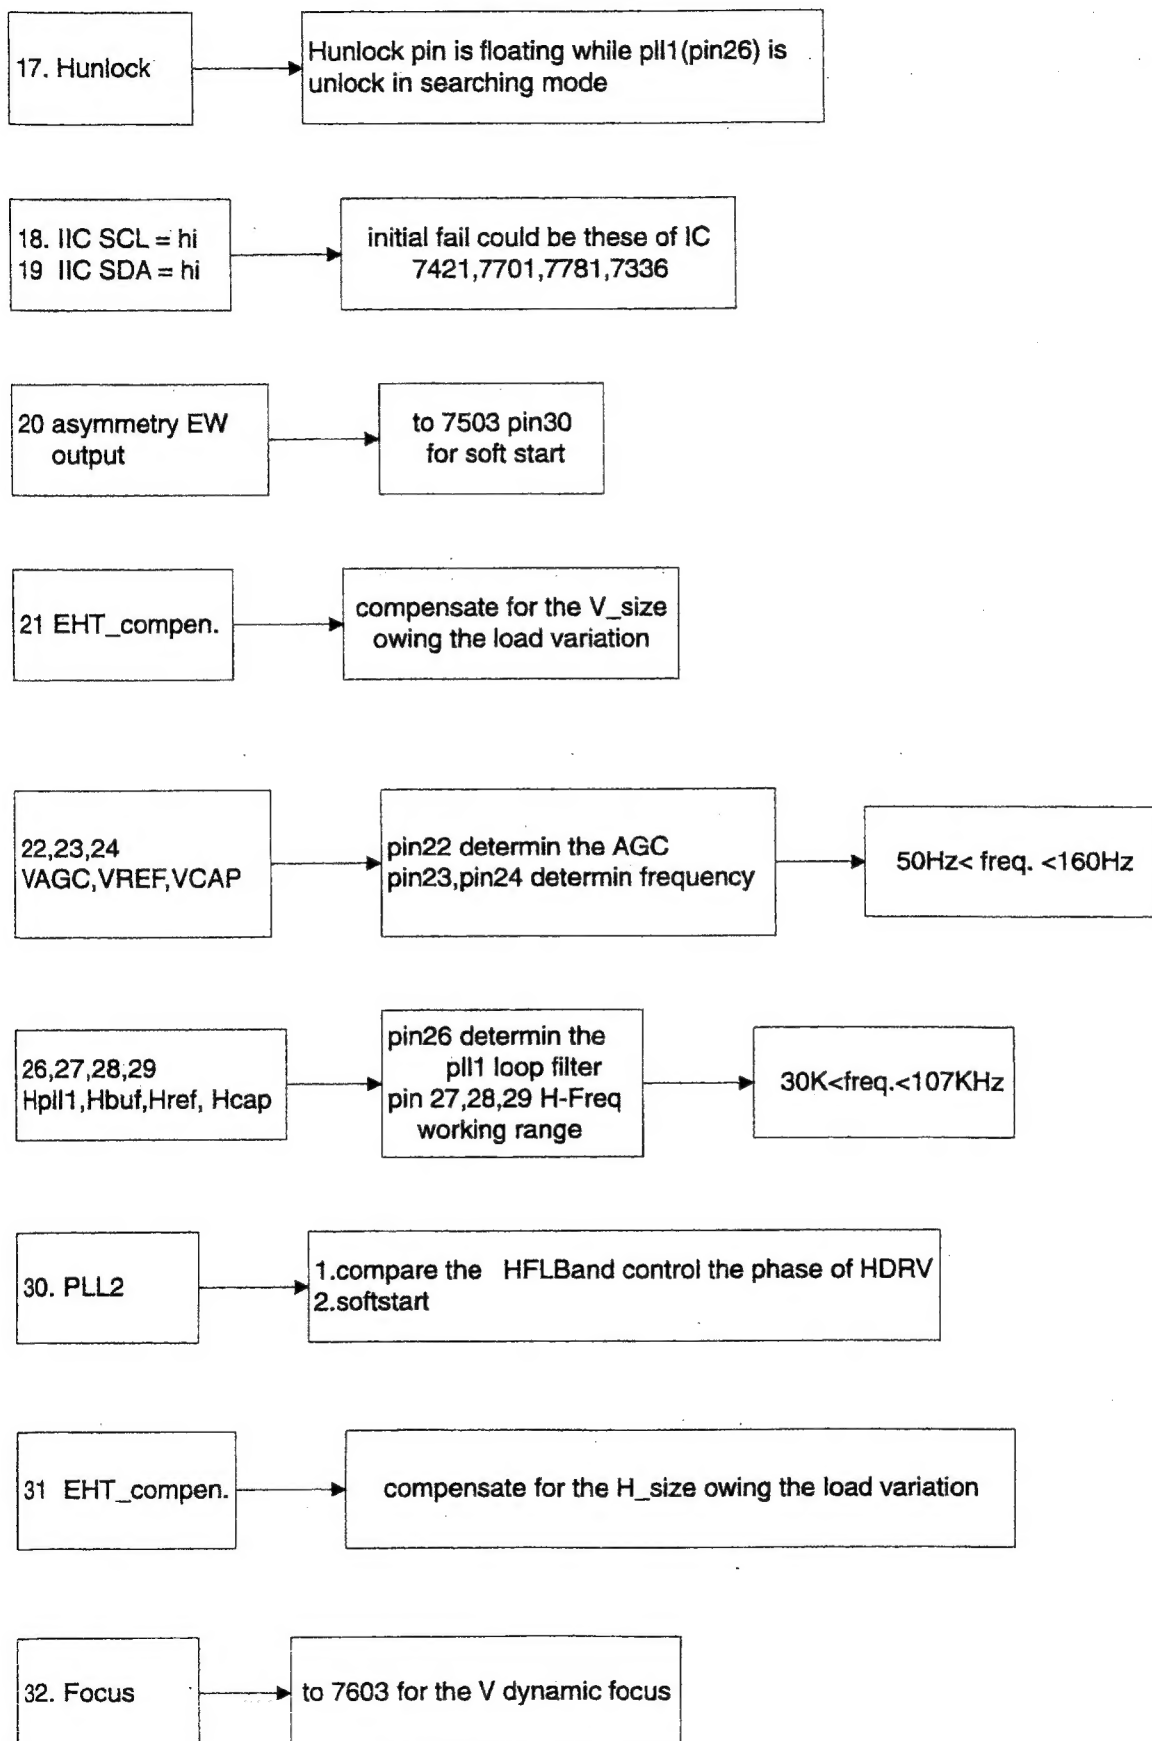

# TELEVISION/MONITOR SAFETY GUIDELINES FOR THE PROFESSIONAL SERVICE TECHNICIAN

## Safety Checks

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

### Fire and Shock Hazard

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.
2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.
3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.
4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.
5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.
6. Critical components having special safety characteristics are identified with an s by the Ref. No. in the parts list and enclosed within a broken line\* (where several critical components are grouped in one area) along with the safety symbols on the schematic diagrams and/or exploded views.
7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.
8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.
9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc. to be sure the unit may be safely operated without danger of electrical shock.

\* Broken line — — — — —

### Implosion

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.
2. Use only replacement tubes specified by the manufacturer.


### X-radiation

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.
2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.
3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.
4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.
5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.

6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.
7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.
8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

### Leakage Current Cold Check

1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.
2. Turn on the power switch.
3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

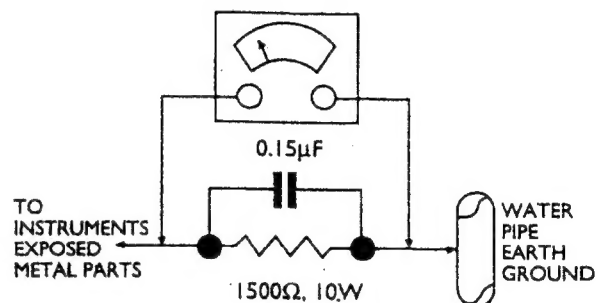

### Leakage Current Hot Check

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.
2. Connect a 1.5k, 10W resistor paralleled by a 0.15µF capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown above.
3. Use an ac voltmeter with at least 5000 ohms/ volt sensitivity to measure the potential across the resistor.
4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5milliamps. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.
5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

### Picture Tube Replacement

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a approved type.

### Parts Replacement

Many electrical and mechanical parts in television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the recommended replacement part shown in this service manual may create shock, fire, or other hazards.

**WARNING:** Before removing the CRT anode cap, turn the unit OFF and short the HIGH VOLTAGE to the CRT DAG ground.  
**SERVICE NOTE:** The CRT DAG is not at chassis ground.